


WiFiScope WS6

250 MHz bandwidth, 1 GSa/s, 256 Mpts 14 bit wireless connected WiFi PC oscilloscope




The high resolution WiFi oscilloscope with the lowest noise and high sensitivity with 4 input channels and an amazing 256 million point record length that can be filled with a sample rate of 1GSa/s. This is the most powerful, portable, battery powered and versatile WiFi PC oscilloscope, EMI pre compliance tester, high resolution multimeter and more..., incorporating innovative technology such as **SureConnect** and CMI interfacing and universal connection through WiFi, wired LAN and SuperSpeed USB 3.0.

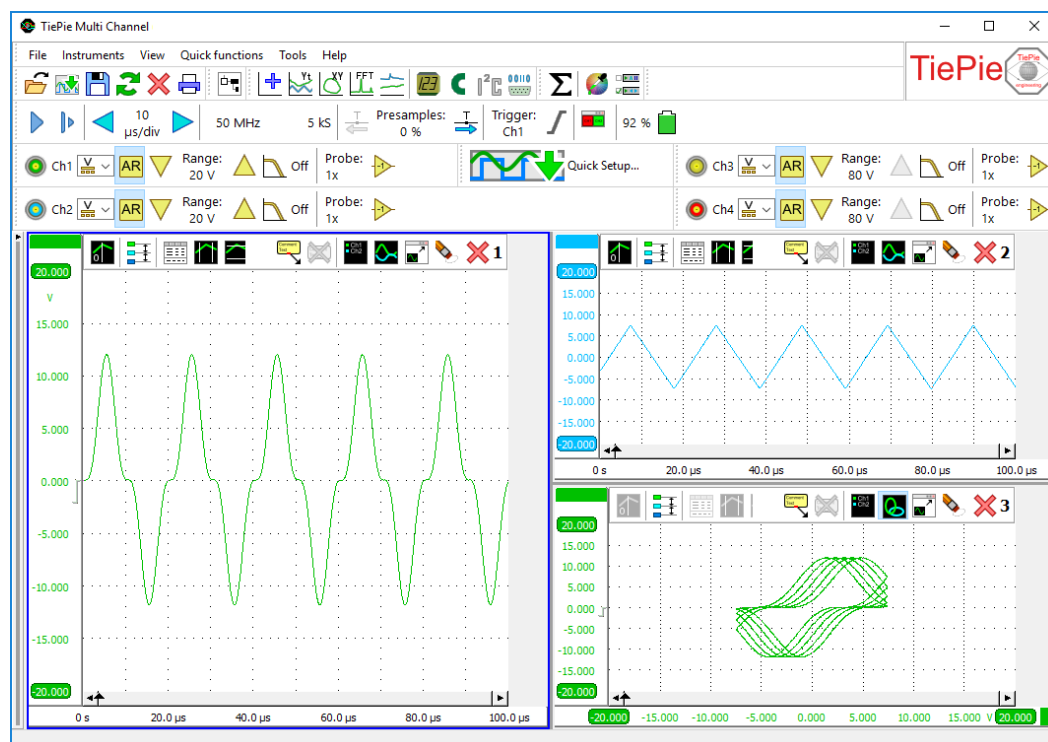

Step into the Next Generation of High Performance WiFi PC oscilloscopes.

The best way to experience that superiority of the WifiScope WS6 series PC oscilloscopes is to use one.



TiePie engineering

WiFiScope WS6, the WiFi PC oscilloscope packed with technology

Key facts of this high sensitivity best in class WiFi oscilloscope:

- WiFi connection, wired LAN connection and SuperSpeed USB 3.0 connection
- Battery powered for hours of fully galvanically isolated measuring
- 1 GSamples per second sample rate WiFi oscilloscope
- 14-16 bit High Resolution, 256 times more amplitude resolution than an 8 bit oscilloscope
- Lowest noise WiFi oscilloscope in the market
- DC Accuracy of 0.25 % and 0.1 % typical
- SureConnect connection test on each channel
- Extremely accurate EMI pre compliance tester with special EMI probe set
- CMI interfacing to combining multiple instruments for fully synchronized measuring
- Up to 250 MHz analog bandwidth
- Switchable hardware-based bandwidth limiter of 150 MHz, 100 MHz and 50 MHz
- Highly accurate 1 ppm timebase
- Super zoom up to 256 Million samples deep buffer memory
- Spectrum analyzer with 32 million bins
- High Performance Digital Multimeter (DMM)
- Very fast 200 MSamples per second data acquisition via USB
- Protocol analyzer
- Quick Setup fast to work with all types of measurements
- I/O block to build your own measurement
- An API and SDK to build your own software
- Free software and firmware updates
- 2 years warranty, 5 years optional

The WiFiScope WS6 provides the best that is available in industry, for a limited budget. The flexibility and quality that the WiFiScope WS6 offers is unparalleled by any other oscilloscope in its class.

Models

The WiFiScope WS6 is available in three different models with an extended memory option (XM), with EMI option (E) and with optional SureConnect connection test and resistance measurement (S).

WiFiScope WS6 model	1000	500	200
Maximum sampling rate	1 GSa/s	500 MSa/s	200 MSa/s
Maximum streaming rate	200 MSa/s	100 MSa/s	40 MSa/s
Maximum record length	standard model	1 Mpts	1 Mpts
	XM option	256 Mpts	256 Mpts

The right choice

The WiFiScope WS6 series WiFi PC oscilloscope, fully packed with technology for all your advanced measurements now and in the future.

This small, light and portable WiFi oscilloscope captures and displays significantly more signal to solve your measurement problem. Because of this, the WiFiScope WS6 series is an ideal choice for demanding measurements.

Expand your channels with the CMI interface and build a comprehensive measuring system in seconds with a lot more than 4 channels and also add AWG generators such as the WiFiScope WS5.



WiFi connected

Using a computer based oscilloscope was never easier than with the WiFiScope WS6: simply switch it on and start the software on the computer:

- no power cables required as it is battery powered and can operate hours on a fully charged battery
- no interface cables required as it uses WiFi to connect to the computer

This allows you to measure fully floating, fully isolated from your computer. The WiFiScope WS6 can be placed near any test subject that may be hard to reach, or on moving objects, where wired connections are not possible.

Because the WiFiScope WS6 is not connected to the computer, there is no risk of damaging the computer.

LAN connected

When measuring in remote locations where a wired network is available, the WiFiScope WS6 can also be used through its LAN port. Measurements can then be performed from any location via the network, without having the computer to be close to the test subject.

Using its 1 Gbit LAN connection, the WiFiScope WS6 can achieve higher streaming performance than via WiFi.

USB 3.0 connected

When wireless measuring or LAN connected measuring is not required or not possible, the WiFiScope WS6 can also be connected via its USB3 port. This gives the benefit of even higher streaming performance. Additionally, when connected via USB, the WiFiScope WS6 can be combined with oscilloscopes via its CMI interface.

Rugged industrial design

The WiFiScope WS6 features a rugged design. Its enclosure is fitted with rubber protectors at the front and the rear. These help absorbing shocks and protect the WiFiScope WS6 against damage by mechanical shocks.

The rubber protects the connectors at the front and the rear of the WiFiScope WS6.

Additionally, the rubber prevents your WiFiScope WS6 from sliding. The rubber protectors have special notches that simplify stacking instruments. Holes are included that allow to connect a strap to hang the instrument near the test subject.



SureConnect connection test on each channel



TiePie engineering is the first oscilloscope manufacturer to implement **SureConnect** technology. While measuring, the revolutionary **SureConnect** technology checks in real time whether a test probe is in physical and electrical contact with the test subject.

Assuring a good connection of a probe with a test subject may not always be easy. The subject under measurement may be dirty, oxidized or an (invisible) protective layer may be present. Or, the test subject may be hidden, making visible contact confirmation impossible. Also, capacitive coupling between test probe and test subject can result in measuring a distorted version of the actual signal, wrongly suggesting a connection. Simply activate the **SureConnect** connection test and you know whether there is contact or not.



SureConnect: no more doubt whether your probe doesn't make contact or there really is no signal.

See a demonstration of **SureConnect** at <https://youtu.be/MinFpSFvtIY>

Resistance measurement on each channel



Many sensors are based on variable resistors. Use your WiFiScope WS6 in the resistance setting to test them, no more need to take a separate ohm meter. Resistance values can be displayed as a number, but it is also possible to display the resistance variation in time, in a graph: an **Ohm scope**.

The Ohm scope uses the same inputs as the oscilloscope. Changing the measure leads is not required. The advanced protection against over voltage ensures that the Ohm scope withstands high voltages.

A typical application is to create resistance graphs of special resistors like NTCs and PTCs. Use e.g. channel 1 to measure the resistance of the PTC and channel 2 to measure the temperature. An XY plot will then show the resistance variation as a function of the temperature.

Advantages of the Ohm scope are:

- Capture fast resistance changes in a graph.
- Detect and locate carbon track defects in a variable resistor.

EMI pre compliance tester



The powerful capabilities of the WiFiScope WS6 EMI analyzer give the user the possibility to quickly perform a good EMI compliance test. With this cost effective test, time and money are saved by avoiding extra visits to expensive EMC testing facilities. The supplied TP-EMI-HS6 probe set contains three magnetic field (H field) probes and one electric field (E field) probe. The tripod ensures that the probes can be positioned properly at the object under test.

The WiFiScope WS6 EMI analyzer has a very low resolution bandwidth of up to 7.45 Hz (at a span of 500 MHz), which is unique in its class. As a result, details in each part of the spectrum can be analyzed thoroughly.

To clarify: a resolution bandwidth of 7.45 Hz at a span of 500 MHz gives a total of 67,108,864 spectral components. When your display is 1920 pixels wide, you require 34,952 displays to show the full spectrum 1:1. 34,952 displays with a width of 50 cm (23" diagonal) each, gives a total display width of 17.47 km (10.85 mile)! So, if you zoom in 35,000 times, you will get the spectral components 1:1 on your display. That is exceptional for an EMI analyzer and it makes each frequency component very well visible.

The WiFiScope WS6 EMI analyzer consists of a WiFiScope WS6-1000 with **option E** installed. Option E also requires options **XM** (extended memory) and **G** (SafeGround) to be installed. Option E also includes the EMI probe set TP-EMI-HS6.

The EMI probe set TP-EMI-HS6 is a complete set of probes, conveniently packed in a carry case. The set contains three differently sized H field probes and an E field probe. To connect the probes to the scope, a short semi flexible antenna cable and a long flexible antenna cable are included. For proper grounding and termination, a grounded 50 Ohm terminator is also included. The tripod allows exact positioning of the probe near the test subject.



The EMI probe set TP-EMI-HS6.

Combining multiple instruments for fully synchronized measuring



The WiFiScope WS6 is equipped with the sophisticated CMI bus, allowing to connect multiple WiFiScope WS6's to each other, which then can be used as a combined instrument *.

All instruments will measure at the same sample frequency (0 ppm deviation!) Apart from a synchronization bus, the CMI also contains a trigger bus and a detection bus. Multiple WiFiScope WS6's can be connected to each other using a coupling cable. The maximum number of instruments is only limited by the number of available USB ports.

When the Multi Channel software is started, the coupled WiFiScope WS6's are identified and automatically combined to a larger instrument. Both the synchronization bus and the trigger bus are automatically terminated at both ends with the correct impedance. Placing terminators is not required by the user. Combining the instruments is fully automatic. This unique possibility to create e.g. a 12 channel instrument is only available with the WiFiScope WS6 and no other WiFi oscilloscope.

The WiFiScope WS5 is also equipped with the CMI bus. Coupling a WiFiScope WS6 with a WiFiScope WS5 gives a 6 channel measuring system with Arbitrary Waveform Generator.

See the CMI bus in action at https://youtu.be/20L_exU3Reg

* Combining is only available when the WiFiScope WS6 is connected via USB.



With a WiFiScope WS6 and a WiFiScope WS5 and a coupling cable you get a 6 channel oscilloscope with a high resolution of 12 bits and a maximum sampling rate of 500 MSa/s in a matter of seconds (no special software or hardware modifications required).

Highly accurate 1 ppm oscilloscope timebase



The time base accuracy of the WiFiScope WS6 is 25 to 100 times better than the comparable instruments of the competition. With a time base accuracy of 1 ppm, frequency and timing can be measured very accurately.

Coupling multiple instruments to a large combined instrument does not affect the time base accuracy, the timing deviation between the coupled instruments is 0 ppm.

Very fast 200 MSamples per second streaming Data logger



When unlimited deep memory is required, it is possible to stream the measured data directly to disk. The WiFiScope WS6 is capable of streaming up to 200 million samples per second, at 12 bit resolution, when measuring 1 channel and connected via USB *. When measuring at 16 bit resolution on all four channels, streaming measurements can be performed up to 6.25 MSa/s. Using streaming measuring, difficult problems can be measured easily and traced back and analyzed.

* When connected via WiFi or LAN, the maximum streaming rate is limited and depends on the network speed and quality.


High amplitude resolution, 256 times more than a standard oscilloscope



A standalone oscilloscope usually has a low resolution of 8 or 9 bit, combined with a limited display of just 5.7" or 8.5", displaying the measured signals in their actual resolution. Zooming in will then not reveal more details.

The WiFiScope WS6 has high resolutions of 14 and 16 bit, making it a truly high precision oscilloscope. With a high resolution, the original signal is sampled much more accurate, the quantization error is much lower.

To display a signal measured with the WiFiScope WS6 high resolution oscilloscope at the same level of detail as the standalone oscilloscope, the display can be 256 times larger. Viewing the signals on a 24" monitor immediately gives a very detailed impression of the signal. The smallest deviations are very well visible and because of the high resolution, it is still possible to zoom in and reveal additional details.

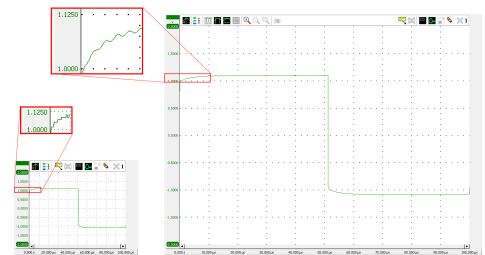

Shown are two displays, both showing a measurement of the same signal. The left display size corresponds to a size comparable to a standalone oscilloscope; at 8 bit resolution, zooming will not reveal more details. The right display corresponds to a maximized window on a standard PC screen; at 14 bit resolution, zooming will still reveal more details.

Mega deep memory of up to 256 MSamples per channel




When measuring at high sample rates, a long record length is a must, otherwise the acquisition buffer is full before the signal is measured. Where most oscilloscopes have 2.5 kSamples or 100 kSamples memory, the WiFiScope WS6 has up to 256 MSamples memory per channel, depending on the selected resolution and the number of active channels. When measuring at 14 bit resolution and all four channels, the available memory is 32 MSamples per channel. This gives the user 300 to 10000 times more memory. The advantage of deep memory is that once-only fast phenomena can be measured accurately or complete serial communication signal blocks like CAN Bus signals can be measured all at once.

To the right, a 256 million samples long measurement is shown. The same signal is shown three times in different zooming factors, the bottom graph shows just 256 ns of the total 356 ms, a zoom factor of 1 million. It still provides enough detail for accurate signal analysis.

In the USB 3.0 spectrum analyzer, the deep memory gives the advantage that a large dynamic range is created which sets troubleshooting in the frequency domain as a new standard.

* When connected via WiFi or LAN, the maximum record length is limited to 64 MSamples.

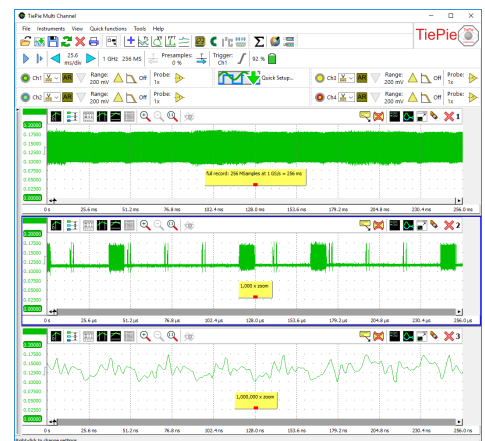


The unlimited super zoom feature of the WiFiScope WS6 allows to zoom in up to one individual sample, no matter what record length was selected.

Switchable hardware-based bandwidth limiter




It seems reasonable to assume that more bandwidth is better, but a wider bandwidth gives more noise. To reduce your noise you can switch the bandwidth limiter on. Enabling the bandwidth limit also avoids under sampling. When a lot of noise appears on your signal and triggering becomes unstable, switching the bandwidth limit on will give a stable triggering. The bandwidth limit can be enabled for each channel individually.

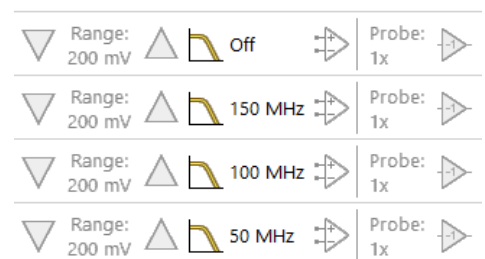

High performance USB 3.0 digital multimeter




With the high resolution of 16 bits, the WiFiScope WS6 can be used as a comprehensive and accurate high performance digital multimeter with good specifications (like e.g. RMS, peak-peak, Max, Min, Mean, Variance, Standard deviation, Frequency, duty cycle, Crest factor, Rise time, Fall time, dBm, etc.). Both numerical and gauge displays are available. The stable and very accurate time base of the WiFiScope WS6 of 1ppm make very accurate frequency and time measurements possible. These qualities make an extra multimeter or frequency counter redundant and make the WiFiScope WS6 unique in its class.

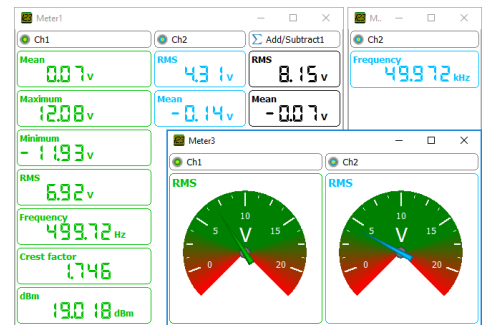

Highest DC accuracy in the industry of 0.1 % typical

Troubleshooting in the frequency domain



The WiFiScope WS6 definitely brings an end to the idea that spectrum analyzers are expensive, hard to control and difficult to understand. The large flexibility of the spectrum analyzer makes it not just suitable for measuring high frequency signals of transmitters and receivers. A spectrum analyzer displays frequency along the X axis and along the Y axis the magnitude of the signal is displayed. This is called a frequency domain display.

When troubleshooting, usually an oscilloscope is used. But when the disturbance is small in amplitude and contains many frequencies, these signals are badly visible on an oscilloscope. They appear like noise signals. But, when these signals are viewed in the frequency domain, a much better overview is presented of the disturbance signals that are present and which frequencies they contain.

When e.g. measurements are performed on a system that contains switch mode power supplies, the disturbances caused by a power supply are easily detected by measuring in the frequency domain. The switch frequency of the switch mode power supply is measured by holding the probe close to the inductor of the power supply. This unique switch frequency is now known and can be stored in a reference channel. When this frequency is also measured at other locations in the system, the frequency is caused by the power supply. Precautions can be made to suppress the disturbing signal from the switch mode power supply. The suppression can be measured directly by the WiFiScope WS6 USB 3.0 spectrum analyzer.

Because the WiFiScope WS6 measures with a very high resolution in the frequency domain, disturbances can be detected and analyzed at one tenth of a Hertz accuracy. Up to 64 million frequency components can be displayed in a graph. Because of the high resolution of the WiFiScope WS6 (14 and 16 bit resolution and up to 128 MSamples), small disturbances can be easily detected. When a precaution is made to suppress the disturbance, its effectiveness can immediately be checked with the WiFiScope WS6. With the high resolution and the large memory of the WiFiScope WS6, a spectrum with a dynamic range of more than 120 dB can be measured. This is unique in its class. With this large dynamic range, distortion measurements can be well performed.




A spectrum with 10 million points and a real time bandwidth of 0-250 MHz, gives you a bin width of 25 Hz and a pulse detection of 2 nsec.

This method of troubleshooting is only possible (and unique for the WiFiScope WS6) because the WiFiScope WS6 contains:


- 250 MHz bandwidth
- 14 and 16 bit resolution
- up to 128 Million samples memory
- very fast FFT calculations

Protocol analyzer



The various serial protocol analyzers of the WiFiScope WS6 can be used to analyze and debug serial data buses. The data is displayed in an elaborate table with information on the serial data. Locating "wrong" data packets has become very easy. For each developer or service technician this is a welcome option. Protocol analyzers for CAN bus data, I²C communication and various other serial data communications are available.

To the right, decoded CAN bus messages are shown.

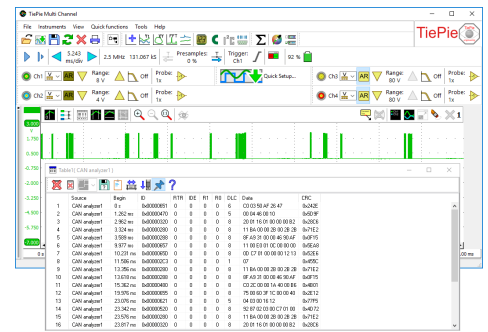


Fast to work with the WiFiScope WS6 and Quick Setups



To simplify setting up measurements, the Multi Channel software contains a large number of Quick Setups, for almost any application. A Quick Setup contains the basic settings for a specific measurement as well as additional information regarding the selected Quick Setup, like e.g. how the instrument and/or accessories need to be connected. Quick Setups can also contain reference signals. After loading the Quick Setup, that specific measurement can be performed and if needed, small adjustments to the setup can be made.

The Quick Setups are carefully organized in a tree structure, ordered by application. Just a few mouse clicks allow to perform a complex measurement.

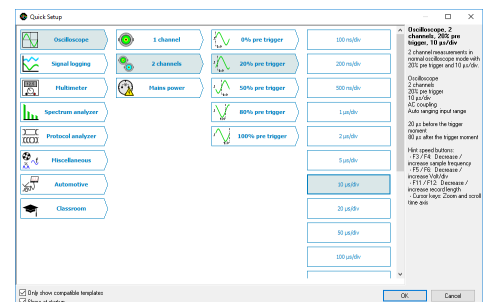


Sophisticated mathematics for in-depth signal analysis



The Multi Channel software for the WiFiScope WS6 offers a large variety of mathematical operations like e.g. adding, subtracting, multiplying, dividing, integrating, differentiating, determining the square root, determining the logarithm, etc. These mathematical operations are available in the form of processing blocks and can be used to process the measured signals and reference signals. Besides the basic mathematical operations, there are also several processing blocks to perform more complex operations on the data, like determining minimum or maximum values, limiting to specified range, averaging, filtering, applying gain and offset, resampling etc.

Combining these mathematical processing blocks gives unrivaled possibilities in constructing complex mathematical operations to analyze your measurements thoroughly and obtain all the information you need from your data. The results can be displayed in graphs, numeric displays and tables and can be written to disk in various common file formats.

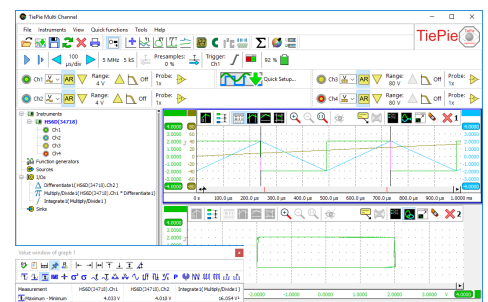

This measurement determines the area of an XY graph, using multiplying, integrating and differentiating I/O's. The area is indicated in the Value window: 16 V².

Σ Add or subtract signals

π Multiply or divide signals

✓ Determine the square root of a signal

|x| Determine the absolute value of a signal

Δ Differentiate a signal

∫ Integrate a signal

log Determine the logarithm of a signal

⬆ Apply gain and offset to a signal

⬇ Apply a low pass filter to a signal


⌘ Average a number of consecutive measurements

⌋ Limit the signal magnitude

⬇ Resample a signal to a different size

The mathematical processing blocks give unrivaled possibilities in constructing complex mathematical operations.

Ease of use

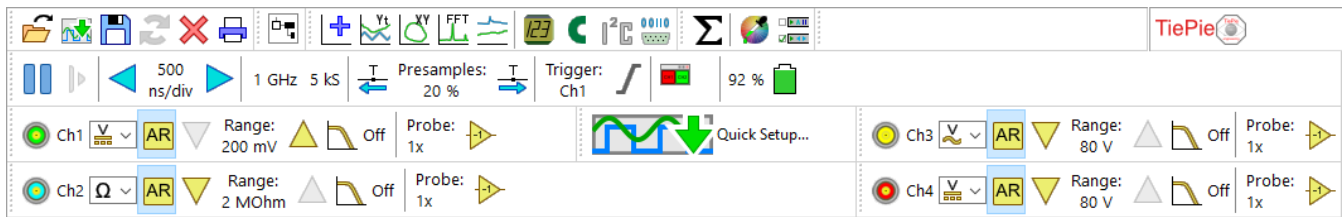

The convenient toolbars offer many ways to control the Wi-FiScope WS6. The toolbars are fully customizable to meet the user's demands. The size of the toolbar buttons can be changed to simplify touch screen control. There are toolbars available for common operations like saving or recalling measurements, for each opened instrument, for each channel and for the quick functions. Using quick functions, complex measurements can be performed immediately by a single click.

Open the Quick Setup screen

Create an Yt oscilloscope

Create a data logger

Create an I²C analyzer

Select a color scheme

Hide/show the Object Tree

Create an XY oscilloscope

Create a multi meter

Create a serial analyzer

Select a toolbar scheme

Create a new graph

Create a spectrum analyzer

Create a CAN Bus analyzer

Create a math channel

With the cursor measurements, individually for each graph, many signal properties can be determined.

Sample value at the left cursor

Sample value at the right cursor

Value difference between right and left cursor

Value at the top cursor

Value at the bottom cursor

Value difference between top and bottom cursor

Slope between the cursors

Maximum signal value

Minimum signal value

Top-bottom value

RMS value of the signal

Mean value of the signal

Variance of all signal values

Standard deviation of all signal values

Frequency of the signal

Period time of the signal

Duty cycle of the signal

Crest factor of the signal

Rise time of the signal

Fall time of the signal

Slew rate of the signal

Number of periods

Number of pulses

Number of rising/falling edges

dBm value of the signal

Power of the signal

Specifications

Acquisition system					
Number of input channels	4 analog				
CH1, CH2, CH3, CH4	male BNC				
Maximum sampling rate	WS6-1000		WS6-500		WS6-200
8 bit					
Measuring one channel	1 GSa/s		500 MSa/s		200 MSa/s
Measuring two channels	500 MSa/s		200 MSa/s		100 MSa/s
Measuring three or four channels	200 MSa/s		100 MSa/s		50 MSa/s
12 bit					
Measuring one channel	500 MSa/s		200 MSa/s		100 MSa/s
Measuring two channels	200 MSa/s		100 MSa/s		50 MSa/s
Measuring three or four channels	100 MSa/s		50 MSa/s		20 MSa/s
14 bit	100 MSa/s		50 MSa/s		20 MSa/s
16 bit	6.25 MSa/s		3.125 MSa/s		1.25 MSa/s
Maximum streaming rate ^{1 2}	WS6-1000		WS6-500		WS6-200
When connected to	USB 3.0	USB 2.0 / LAN / WiFi	USB 3.0	USB 2.0 / LAN / WiFi	USB / LAN / WiFi
8 bit					
Measuring one channel	200 MS/s	40 MS/s	100 MS/s	40 MS/s	40 MS/s
Measuring two channels	100 MS/s	20 MS/s	50 MS/s	20 MS/s	20 MS/s
Measuring three or four channels	50 MS/s	10 MS/s	25 MS/s	10 MS/s	10 MS/s
12 bit					
Measuring one channel	100 MS/s	20 MS/s	50 MS/s	20 MS/s	20 MS/s
Measuring two channels	50 MS/s	10 MS/s	25 MS/s	10 MS/s	10 MS/s
Measuring three or four channels	25 MS/s	5 MS/s	12.5 MS/s	5 MS/s	5 MS/s
14 bit					
Measuring one channel	100 MS/s	20 MS/s	50 MS/s	20 MS/s	20 MS/s
Measuring two channels	50 MS/s	10 MS/s	25 MS/s	10 MS/s	10 MS/s
Measuring three or four channels	25 MS/s	5 MS/s	12.5 MS/s	5 MS/s	5 MS/s
16 bit	6.25 MS/s	3.125 MS/s	3.125 MS/s	3.125 MS/s	1.25 MS/s
Sampling source					
Internal	TCXO				
Accuracy	±0.0001 %				
Stability	±1 ppm over 0 °C to 55 °C				
Time base aging	±1 ppm per year				
External	LVDS, on auxiliary connectors				
Input range	10 MHz, 16.369 MHz				
Memory	Standard model		XM option via USB		XM option via LAN / Wifi
8 bit					
Measuring one channel	1 MS / channel		256 MS / channel		64 Mpts / channel
Measuring two channels	512 KS / channel		128 MS / channel		32 Mpts / channel
Measuring three or four channels	256 KS / channel		64 MS / channel		16 Mpts / channel
12, 14, 16 bit					
Measuring one channel	512 KS / channel		128 MS / channel		32 Mpts / channel
Measuring two channels	256 KS / channel		64 MS / channel		16 Mpts / channel
Measuring three or four channels	128 KS / channel		32 MS / channel		8 Mpts / channel
CH1, CH2, CH3, CH4					
Type	Single ended inputs				
Resolution	8, 12, 14, 16 bit user selectable				
DC Accuracy	0.25 % (0.1 % typical) of full scale ± 1 LSB at 20 ° to 25 °C To achieve rated accuracy, allow the instrument to settle for 20 minutes. When subjected to extreme temperatures, allow additional time for internal temperatures to stabilize.				
Ranges (full scale)	±200 mV ±400 mV ±800 mV	±2 V ±4 V ±8 V			±20 V ±40 V ±80 V
Coupling	AC/DC				
Impedance	1 MΩ / 20 pF ± 1 % m				
Noise (at 200 mV input range)	295 μVrms				
Maximum input voltage	200 V (DC + AC peak < 10 kHz)				
Bandwidth (-3dB) at 75 % of full scale input	250 MHz				
AC coupling cut off frequency (-3dB)	±1.5 Hz				
Bandwidth limit, selectable per channel	Off (250 MHz)	150 MHz	100 MHz	50 MHz	
SureConnect	Optionally available (option S)				
Maximum voltage on connection	200 V (DC + AC peak <10 kHz)				
Resistance measurement	Optionally available (option S)				
Ranges (full scale)	1 kΩ 2 kΩ 5 kΩ	10 kΩ 20 kΩ 50 kΩ	100 kΩ 200 kΩ 500 kΩ	1 MΩ 2 MΩ	
Accuracy	1 %				
Response time (to 95 %)	<10 μs				


- On some computers, the highest streaming rates may not be available, due to computer restrictions.
- When LAN/WiFi connected, the maximum streaming rate is limited, and depends on the quality of the network.

Trigger	
System	Digital, 2 levels
Source	CH1, CH2, CH3, CH4, digital external, OR
Trigger modes	Rising/falling/any edge, inside/outside window, enter/exit window, pulse width, runt pulse
Level adjustment	0 to 100 % of full scale
Hysteresis adjustment	0 to 100 % of full scale
Resolution	0.024 % (12 bits)/0.006 % (14/16 bits)
Pre trigger	0 to selected record length, 1 sample resolution
Post trigger	0 to selected record length, 1 sample resolution
Trigger hold-off	0 to 63 MSamples, 1 sample resolution
Trigger delay	0 to 16 GSamples, 1 sample resolution
Digital external trigger	
Input	Extension connector pins 1, 2
Range	0 to 2.5 V (TTL)
Coupling	DC
Jitter	≤ 1 sample

Multi instrument synchronization	
Combining instruments is only available when all instruments are connected via USB. When instruments are connected via LAN or WiFi, combining is not available.	
Maximum number of instruments	Limited by number available USB ports
Synchronization accuracy	0 ppm
CMI interface	2x, CMI 1, CMI 2
Required coupling cable	TP-C50H
Maximum coupling cable length	50 cm


Probe calibration	
Output	Extension connector pins 3 (signal) and 6 (ground)
Signal	Square wave
Level	-1 V to 1 V
Frequency	1 kHz

I/O connectors	
Front	

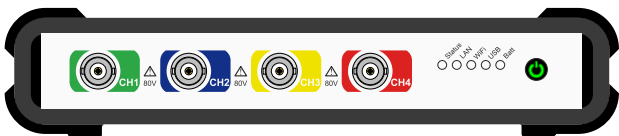

CH1, CH2, CH3, CH4	Male BNC
Extra ground	2 mm gold plated banana socket next to CH1, only with option E EMI

Rear	
------	--

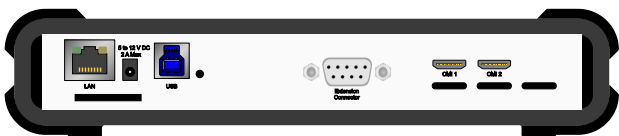

LAN	RJ45 socket
USB	USB 3.0 type B Super Speed socket
Extension connector	D-sub 9 pins female
Power	3.5 mm power socket
CMI connectors 1 to 2	HDMI type C socket

Physical	
Height	44 mm (1.7 inch)
Length	187 mm (6.7 inch)
Width	215 mm (5.2 inch)
Weight	791 g (27.9 ounce)

Interface	
USB	USB 3.0 SuperSpeed (5 Gbit/s)
LAN	1 Gbps
WiFi	802.11

System requirements	
PC I/O connection	USB 2.0 USB 3.0 or USB 3.1 RJ45 WiFi
Operating System	Windows 10, 32 and 64 bits Linux (via own software using the LibTiePie SDK)

Environmental conditions	
Operating	
Ambient temperature	20 °C to 25 °C 10 °C to 40 °C without specifications
Relative humidity	10 to 90 % non condensing
Charging	
Ambient temperature	0 °C to 35 °C
Relative humidity	10 to 95 % non condensing
Storage	
Ambient temperature	0 °C to 35 °C
Relative humidity	5 to 95 % non condensing

Certifications and Complies	
CE mark compliance	Yes
RoHS	Yes
EN 55011:2016/A1:2017	Yes
EN 55022:2011/C1:2011	Yes
IEC 61000-6-1:2019 EN	Yes
IEC 61000-6-3:2007/A1:2011/C11:2012	Yes
ICES-001:2004	Yes
AS/NZS CISPR 11:2011	Yes
IEC 61010-1:2010/A1:2019	Yes
UL 61010-1, Edition 3	Yes

Power	
Power	From USB, external input or built-in battery
Consumption	12 Vdc, 2 A max
External power	From power adapter
Internal battery	Li-ion
Capacity	7000 mAh, 3.7 V
Operating time	Strongly depending on instrument setup, ≥ 3 hours

Power adapter	
TP-UES24LCP-120200SPA	
Input	110 to 240 Vac, 50 to 60 Hz
Output	12 Vdc, 2.0 A
Dimension	
Height	88 mm
Width	30 mm
Length	57 mm
Replaceable mains plugs for	EU, US, AU, UK
Order number	TP-UES24LCP-120200SPA



Probes		
	HP-9250	
	X1	X10
Bandwidth	6 MHz	250 MHz
Rise time	58 ns	1.4 ns
Input impedance	1 MΩ scope impedance	10 MΩ incl. 1 MΩ scope impedance
Input capacitance	47 pF + scope capacitance	17 pF
Compensation range	-	10 to 35 pF
Working voltage (DC + AC peak)	300 V 150 V CAT II	600 V 300 V CAT II



D-sub to BNC adapter	
TP-BNC-09	
Connectors	
Instrument side	9 pin D-Sub male
Probe side	Female BNC
Dimensions	
Length	300 mm
Weight	30 g
Order number	TP-BNC-09



WiFiScope WS6, the WiFi oscilloscope packed with technology

Accessories included	
Instrument	WiFiScope WS6 : WS6-xxx-xx (see below)
Measure leads	4 x HP-9250 X1 / X10 switchable oscilloscope probes
Accessories	Power adapter : TP-UES24LCP-120200SPA USB cable, 1.5 m long LAN cable, 3 m long D-sub to BNC adapter : TP-BNC-09, for calibrating the HP-9250 probe EMI probe set TP-EMI-HS6, only with option E
Software	For Windows 10 via website
Drivers	For Windows 10 via website
Manual	Quick Start Guid, Instrument manual and Software manual
Carry case	1 x TP-BB452 Carry case



Optional accessories	
Optional accessories	must be ordered separately
Coupling cable	TP-C50H Coupling cable to couple two instruments. The TP-C50H must be ordered separately.

Warranty	
Warranty	Two years standard, five years optional

Customer service


The WiFiScope WS6 is designed, manufactured and tested to provide high reliability.
In the unlikely event you experience difficulties, the WiFiScope WS6 is fully warranted for three years.
This warranty includes:

- All parts and labor (excluding probes and/or measure leads **and/or** batteries)
- **Warranty on batteries is 6 months.**
- No charge for return shipping
- Long-term 7-year support
- Upgrade to the latest software at no charge

Ordering information	
WiFiScope WS6 Model	Order code
1 GSa/s, 1 Mpts, 3 year warranty	WS6-1000
500 MSa/s, 1 Mpts, 3 year warranty	WS6-500
200 MSa/s, 1 Mpts, 3 year warranty	WS6-200

Available options for the WiFiScope WS6 are:

- **XM:** With the extended memory option, 256 MSamples memory is available. Add **XM** to the order code.
- **E:** With the EMI option, the WiFiScope WS6 can be used as EMI pre compliance tester. The option includes the TP-EMI-HS6 probe set. The EMI option is only available on a WiFiScope WS6-1000 and requires options XM and G to be installed as well. Add **E** to the order code.
- **S:** With the **SureConnect** option, connection test and resistance measurement are available on all channels. Add **S** to the order code.
- **W5:** With the extended warranty option, warranty is five years on parts and labor. Add **-W5** to the order code.



This information is subject to change without notice. Copyright © 2020 TiePie engineering. All rights reserved. Revision 1.1, July, 2020.