

## COMPACT PROGRAMMABLE AC/DC POWER SOURCE



The ASR-2000 series, an AC+DC power source aiming for system integration or desktop applications, provides both rated power output for AC output and rated power output for DC output. Ten ASR-2000 output modes are available, including 1) AC power output mode (AC-INT Mode), 2) DC power output mode (DC-INT Mode), 3) AC/DC power output mode (AC+DC-INT Mode), 4) External AC signal source mode (AC-EXT Mode), 5) External AC/DC signal source mode (AC+DC-EXT Mode), 6) External AC signal superimposition mode (AC-ADD Mode), 7) External AC/DC signal superimposition mode (AC+DC-ADD Mode), 8) External AC signal synchronization mode (AC-SYNC Mode), 9) External AC/DC signal synchronization mode (AC+DC-SYNC Mode), 10) External DC voltage control of AC output mode (AC-VCA).

The ASR-2000 series provides users with waveform output capabilities to meet the test requirements of different electronic component development, automotive electrical devices and home appliance, including 1) Sequence mode generates waveform fallings, surges, sags, changes and other abnormal power line conditions; 2) Arbitrary waveform function allows users to store/upload user-defined waveforms; and 3) Simulate mode simulates power outage, voltage rise, voltage fall, and frequency variations. When the ASR-2000 series power source outputs, it can also measure Vrms, Vavg, Vpeak, Irms, Iavg, Ipeak, IpkH, P, S, Q, PF, CF, 100th-order Voltage Harmonic and Current Harmonic. In addition, the Remote sense function ensures accurate voltage output. The Customized Phase Angle for Output On/Off function can set the starting angle and ending angle of the voltage output according to the test requirements. V-Limit, Ipeak-Limit, F-Limit, OVP, OCP, OPP function settings can protect the DUT during the measurement process. In addition to OTP, OCP, and OPP protection, the ASR-2000 series also incorporates the Fan fail alarm function and AC fail alarm function.

The front panel of the ASR-2050/2100 provides a universal socket or a European socket, which allows users to plug and use so as to save wiring time. The ASR-2050R/2100R is 3U height and 1/2 Rack width design, which is compatible with ATS assembly. The ASR-2000 series supports I/O interface and is equipped with USB, LAN, External I/O and optional RS-232C and GPIB.

## ASR-2000 Series

### FEATURES

- Output Rating: AC 0 ~ 350 Vrms, DC 0 ~  $\pm 500$  V
- Output Frequency up to 999.9 Hz
- DC Output (100% of Rated Power)
- Output Capacity: 500VA/ 1000VA
- Measurement Items: Vrms, Vavg, Vpeak, Irms, IpkH, Iavg, Ipeak, P, S, Q, PF, CF
- Voltage and Current Harmonic Analysis (THDv, THDi)
- Customized Phase Angle for Output On/Off
- Remote Sensing Capability
- OVP, OCP, OPP, OTP, AC Fail Detection and Fan Fail Alarm
- Interface: USB, LAN(std.); RS-232+GPIB(opt)
- Built-in External Control I/O and External Signal Input
- Built-in Output Relay Control
- Memory Function (up to 10 sets)
- Sequence and Simulation Function (up to 10 sets)
- Support Arbitrary Waveform Function
- Built-in Web Server



Front Panel



Rear Panel


### APPLICATIONS

- Electronic Products/Electronic Component Development Test
- Automotive Electrical Equipment Simulation Test
- Household Appliance Application Test


ASR-2000 Series

**GW INSTEK**  
Simply Reliable


## A. OPERATING AREA FOR ASR-2000 SERIES




AC Output for  
ASR-2050/ASR-2050R



DC Output for  
ASR-2050/ASR-2050R



AC Output for  
ASR-2100/ASR-2100R



DC Output for  
ASR-2100/ASR-2100R

The ASR-2000 series is an AC+DC power source that provides rated power output not only at the AC output, but also at the DC output. The operation areas are shown in diagrams.

Model Name	Power Rating	Max. Output Current	Max. Output Voltage
ASR-2050	500 VA	5 / 2.5 A	350 Vrms / 500 Vdc
ASR-2100	1000 VA	10 / 5 A	350 Vrms / 500 Vdc
ASR-2050R	500 VA	5 / 2.5 A	350 Vrms / 500 Vdc
ASR-2100R	1000 VA	10 / 5 A	350 Vrms / 500 Vdc

## B. MEASUREMENT ITEMS FOR ASR-2000 SERIES




RMS Meas Display




AVG Meas Display



Peak Meas Display

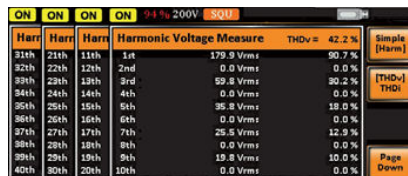

Voltage Harmonic

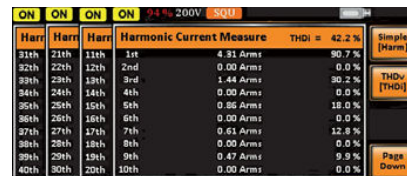


Current Harmonic


The ASR-2000 series provides users with measurement capabilities including Vrms/Irms, Vavg/Iavg and Vmax/Vmin/Imax/Imin can be switched by users at any time to display the instantaneous calculation reading. During the power output, the measurement

parameters including Vrms/Irms, Vavg/Iavg and Vmax/Vmin/Imax/Imin can be switched by users at any time to display the instantaneous calculation reading.


## C. SEQUENCE MODE AND APPLICATIONS




Momentary Drop in Supply Voltage



Reset Behavior at Voltage Drop



Starting Profile Waveform



Instantaneous Power Failure

There are 10 sets of Sequence mode and each set has 0~999 steps. The time setting range of each step is 0.0001 ~ 999.9999 seconds. Users can combine multiple sets of steps to generate

the desired waveforms, including waveform fallings, surges, sags, changes and other abnormal power line conditions to meet the needs of the test application.

SPECIFICATIONS			ASR-2050/ASR-2050R		ASR-2100/ASR-2100R	
INPUT RATING (AC)						
NORMINAL INPUT VOLTAGE			100 Vac to 240 Vac		100 Vac to 240 Vac	
INPUT VOLTAGE RANGE			90 Vac to 264 Vac		90 Vac to 264 Vac	
PHASE			Single phase, Two-wire		Single phase, Two-wire	
INPUT FREQUENCY RANGE			47 Hz to 63 Hz		47 Hz to 63 Hz	
MAX. POWER CONSUMPTION			800 VA or less		1500 VA or less	
POWER FACTOR <sup>*1</sup>			100Vac 200Vac 0.95 (typ.) 0.90 (typ.)		0.95 (typ.) 0.90 (typ.)	
MAX. INPUT CURRENT			100Vac 200Vac 8 A 4 A		15 A 7.5 A	
<sup>*1</sup> . For an output voltage of 100 V/200 V (100V/200V range), maximum current, and a load power factor of 1.						
AC MODE OUTPUT RATINGS (AC rms)						
VOLTAGE		Setting Range <sup>*1</sup> Setting Resolution Accuracy <sup>*2</sup>	0.0 V to 175.0 V / 0.0 V to 350.0 V 0.1 V ±(0.5 % of set + 0.6 V / 1.2 V) Single phase, Two-wire			
OUTPUT PHASE						
MAXIMUM CURRENT <sup>*3</sup>		100 V 200 V	5 A 2.5 A	10 A 5 A		
MAXIMUM PEAK CURRENT <sup>*4</sup>		100 V 200 V	20 A 10 A	40 A 20 A		
POWER CAPACITY			500 VA	1000 VA		
FREQUENCY		Setting Range Setting Resolution Accuracy Stability <sup>*5</sup>	AC Mode: 40.00 Hz to 999.9 Hz, AC+DC Mode: 1.00 Hz to 999.9 Hz 0.01 Hz (1.00 to 99.99 Hz), 0.1 Hz (100.0 to 999.9 Hz) For 45 Hz to 65 Hz: 0.01% of set, For 40 Hz to 999.9 Hz: 0.02% of set ± 0.005% 0.0° to 359.9° variable (setting resolution 0.1°) Within ± 20 mV (TYP)			
OUTPUT ON PHASE						
DC OFFSET <sup>*6</sup>						
<sup>*1</sup> . 100 V / 200 V range <sup>*2</sup> . For an output voltage of 17.5 V to 175 V / 35 V to 350 V, sine wave, an output frequency of 45 Hz to 65 Hz, no load, DC voltage setting 0V (AC+DC mode) and 23°C ± 5°C <sup>*3</sup> . For an output voltage of 1 V to 100 V / 2 V to 200 V, Limited by the power capacity when the output voltage is 100 V to 175 V / 200 V to 350 V. <sup>*4</sup> . With respect to the capacitor-input rectifying load. Limited by the maximum current. <sup>*5</sup> . For 45 Hz to 65 Hz, the rated output voltage, no load and the resistance load for the maximum current, and the operating temperature. <sup>*6</sup> . In the case of the AC mode and output voltage setting to 0V.						
OUTPUT RATING FOR DC MODE						
VOLTAGE		Setting Range <sup>*1</sup> Setting Resolution Accuracy <sup>*2</sup>	-250 V to +250 V / -500 V to +500 V 0.1 V ±( 0.5 % of set  + 0.6 V / 1.2 V)			
MAXIMUM CURRENT <sup>*3</sup>		100 V 200 V	5 A 2.5 A	10 A 5 A		
MAXIMUM PEAK CURRENT <sup>*4</sup>		100 V 200 V	20 A 10 A	40 A 20 A		
POWER CAPACITY			500 W	1000 W		
<sup>*1</sup> . 100 V / 200 V range <sup>*2</sup> . For an output voltage of -250 V to -25 V, +25 V to +250 V / -500 V to -50 V, +50 V to +500 V, no load, AC volatge setting 0V (AC+DC mode) and 23°C ± 5°C <sup>*3</sup> . For an output voltage of 1.4 V to 100 V / 2.8 V to 200 V, Limited by the power capacity when the output voltage is 100 V to 250 V / 200 V to 500 V. <sup>*4</sup> . Within 5 ms, Limited by the maximum current.						
OUTPUT VOLTAGE STABILITY						
LINE REGULATION <sup>*1</sup>			±0.2% or less			
LOAD REGULATION <sup>*2</sup>			0.15% @45 - 65Hz; 0.5% @DC, all other frequencies (0 to 100%, via output terminal)			
RIPPLE NOISE <sup>*3</sup>			0.7 Vrms / 1.4 Vrms (TYP)			
<sup>*1</sup> . Power source input voltage is 100 V, 120 V, or 230 V, no load, rated output. <sup>*2</sup> . For an output volatge of 75 V to 175V/150V to 350V, a load power factor of 1, stepwise change from an output current of 0 A to maximum current(or its reverse), using the output terminal on the rear panel. <sup>*3</sup> . For 5 Hz to 1 MHz components in DC mode using the output terminal on the rear panel.						
OUTPUT VOLTAGE WAVEFORM DISTORTION RATIO, OUTPUT VOLTAGE RESPONSE TIME, EFFICIENCY						
OUTPUT VOLTAGE WAVEFORM DISTORTION RATIO <sup>*1</sup>			0.5 % or less			
OUTPUT VOLTAGE RESPONSE TIME <sup>*2</sup>			100 us (TYP)			
EFFICIENCY <sup>*3</sup>			70 % or more			
<sup>*1</sup> . At an output voltage of 50 V to 175 V / 100 V to 350 V, a load power factor of 1, and in AC and AC+DC mode. <sup>*2</sup> . For an output voltage of 100 V / 200 V, a load power factor of 1, with respect to stepwise change from an output current of 0 A to the maximum current (or its reverse); 10% ~ 90% of output voltage <sup>*3</sup> . For AC mode, at an output voltage of 100 V / 200 V, maximum current, and load power factor of 1 and sine wave only.						
MEASURED VALUE DISPLAY						
VOLTAGE		RMS, AVG Value <sup>*1</sup> PEAK Value	Resolution Accuracy <sup>*2</sup> Resolution Accuracy	0.1 V For 45 Hz to 65 Hz and DC: ±(0.5 % of reading + 0.3 V/0.6 V)For 40 Hz to 999.9 Hz: ±(0.7 % of reading + 0.9 V/1.8 V) 0.1 V For 45 Hz to 65 Hz and DC: ±( 2 % of reading  + 1 V / 2 V)		
CURRENT		RMS, AVG Value PEAK Value	Resolution Accuracy <sup>*3</sup> Resolution Accuracy <sup>*4</sup>	0.01 A For 45 Hz to 65 Hz and DC:±(0.5 % of reading+0.02 A/0.02 A); For 40 Hz to 999.9 Hz:±(0.7 % of reading + 0.04 A / 0.04 A) 0.01 A For 45 Hz to 65 Hz and DC:±( 2 % of reading +0.2 A/0.1 A)		
POWER		Active (W) Apparent (VA) Reactive (VAR)	Resolution Accuracy <sup>*5</sup> Resolution Accuracy <sup>*5*</sup> Resolution Accuracy <sup>*5**</sup>	0.01 A For 45 Hz to 65 Hz and DC:±(0.5 % of reading+0.04 A/0.02 A); For 40 Hz to 999.9 Hz:±(0.7 % of reading + 0.08 A / 0.04 A) 0.01 A For 45 Hz to 65 Hz and DC:±( 2 % of reading +0.2 A/0.1 A) 0.1 / 1 W ±(2 % of reading + 0.5 W) 0.1 / 1 VA ±(2 % of reading + 0.5 VA) 0.1 / 1 VAR ±(2 % of reading + 0.5 VAR)		
LOAD POWER FACTOR			Range Resolution	0.000 to 1.000 0.001		
LOAD CREST FACTOR			Range Resolution	0.00 to 50.00 0.01		

SPECIFICATIONS			
		ASR-2050/ASR-2050R	ASR-2100/ASR-2100R
HARMONIC VOLTAGE EFFECTIVE VALUE (RMS) PERCENT (%) (AC-INT and 50/60 Hz only)	Range Full Scale Resolution Accuracy <sup>*8</sup>	Up to 100th order of the fundamental wave 175 V / 350 V, 100% 0.1 V, 0.1% Up to 20th ± (0.2 % of reading + 0.5 V / 1 V); 20th to 100th ± (0.3 % of reading + 0.5 V / 1 V)	Up to 100th order of the fundamental wave 175 V / 350 V, 100% 0.1 V, 0.1% Up to 20th ± (0.2 % of reading + 0.5 V / 1 V); 20th to 100th ± (0.3 % of reading + 0.5 V / 1 V)
HARMONIC CURRENT EFFECTIVE VALUE (RMS) PERCENT (%) (AC-INT and 50/60 Hz only)	Range Full Scale Resolution Accuracy <sup>*3</sup>	Up to 100th order of the fundamental wave 5 A / 2.5 A, 100% 0.01 A, 0.1% Up to 20th ± (1 % of reading + 0.1 A / 0.05 A); 20th to 100th ± (1.5 % of reading + 0.1 A / 0.05 A)	Up to 100th order of the fundamental wave 10 A / 5 A, 100% 0.01 A, 0.1% Up to 20th ± (1 % of reading + 0.2 A / 0.1 A); 20th to 100th ± (1.5 % of reading + 0.2 A / 0.1 A)
<div>*1. The voltage display is set to RMS in AC/AC+DC mode and AVG in DC mode.</div> <div>*2. AC mode: For an output voltage of 17.5 V to 175 V / 35 V to 350 V and 23 °C ± 5 °C. DC mode: For an output voltage of 25 V to 250 V / 50 V to 500 V and 23 °C ± 5 °C.</div> <div>*3. An output current in the range of 5 % to 100 % of the maximum current, and 23 °C ± 5 °C.</div> <div>*4. An output current in the range of 5 % to 100 % of the maximum peak current in AC mode, an output current in the range of 5 % to 100 % of the maximum instantaneous current in DC mode, and 23 °C ± 5 °C. The accuracy of the peak value is for a waveform of DC or sine wave</div> <div>*5. For an output voltage of 50 V or greater, an output current in the range of 10 % to 100 % of the maximum current, DC or an output frequency of 45 Hz to 65 Hz, and 23 °C ± 5 °C.</div> <div>*6. The apparent and reactive powers are not displayed in the DC mode.</div> <div>*7. The reactive power is for the load with the power factor 0.5 or lower. *8. An output voltage in the range of 17.5 V to 175 V / 35 V to 350 V and 23 °C ± 5 °C.</div>			
OTHERS			
PROTECTIONS DISPLAY MEMORY FUNCTION ARBITRARY WAVE INTERFACE <div>Number of Memories Waveform Length Standard USB LAN EXT Control Factory Optional GPIB RS-232C</div>	OCP, OTP, OPP, FAN Fail TFT-LCD, 4.3 inch 10 sets for Store and Recall settings 16 (nonvolatile) 4096 words Type A: Host, Type B: Slave, Speed: 1.1/2.0, USB-CDC MAC Address, DNS IP Address, User Password, Gateway IP Address, Instrument IP Address, Subnet Mask External Signal Input; External Control I/O SCPI-1993, IEEE 488.2 compliant interface Complies with the EIA-RS-232 specifications 500 Vdc, 30 MΩ or more		
INSULATION RESISTANCE Between input and chassis, output and chassis, input and output	1500 Vac, 1 minute		
WITHSTAND VOLTAGE Between input and chassis, output and chassis, input and output	1500 Vac, 1 minute		
EMC	EN 61326-1 (Class A) EN 61326-2-1/-2-2 (Class A) EN 61000-3-2 (Class A, Group 1) EN 61000-3-3 (Class A, Group 1) EN 61000-4-2/-4-3/-4-4/-4-5/-4-6/-4-8/-4-11 (Class A, Group 1) EN 55011 (Class A, Group1) EN 61010-1		
Safety Environment	Indoor use, Overvoltage Category II 0 °C to 40 °C -10 °C to 70 °C 20 %rh to 80 % RH (no condensation) 90 % RH or less (no condensation) Up to 2000 m		
Operating Environment Operating Temperature Range Storage Temperature Range Operating Humidity Range Storage Humidity Range Altitude	ASR-2000 : 285(W)×124(H)×480(D) (not including protrusions); Approx. 11.5 kg ASR-2000R : 213(W)×124(H)×480(D) (not including protrusions); Approx. 10.5 kg		
DIMENSIONS & WEIGHT			

Specifications subject to change without notice. ASR-2000GD2DH

ORDERING INFORMATION		OPTIONAL ACCESSORIES	
ASR-2050	500VA Programmable AC/DC Power Source	Opt01	RS-232+GPIB Communication Functions(Factory installed)
ASR-2100	1000VA Programmable AC/DC Power Source	Opt02	European Output Outlet only for ASR-2000(Factory installed)
ASR-2050R	500VA Programmable AC/DC Power Source for 3U 1/2 Rack Mount	GET-003	Extended Universal Power Socket (ASR-2000R only)
ASR-2100R	1000VA Programmable AC/DC Power Source for 3U 1/2 Rack Mount	GET-004	Extended European Power Socket(ASR-2000R only)
ACCESSORIES		GRA-439-E	Rack Mount Kit (EIA)
CD ROM(User Manual, Programming manual), Safety Guide, Power Cord, Mains Terminal Cover Set, Remote Sense Terminal Cover Set, GTL-123 Test Lead, GTL-246 USB Cable		GTL-258	GPIB Cable, approx. 2M, including 25 pins Micro-D connector
		GTL-232	RS-232C Cable, approx. 2M
		ASR-001	Air inlet filter
FREE DOWNLOAD			
		USB Driver	