


Digital I/O Unit with Opto-Isolation for USB DIO-6464LX-USB



- * The contents in this document are subject to change without notice.
- * Visit the CONTEC website to check the latest details in the document.
- * The information in the data sheets is as of July 2022.

Features

- **64 channels of Optocoupler isolated inputs (compatible with current sink output) and 64 channels of Optocoupler isolated open-collector outputs (current sink type)**
This product has the 64 channels of Optocoupler isolated inputs (compatible with current sink output) and the 64 channels of Optocoupler isolated open-collector outputs (current sink type) whose response speed is 200μsec. Supporting driver voltages of 12 - 24 VDC for I/O.
(12 - 24VDC external circuit power supply is required separately.)
- **Compatible to USB1.1/USB2.0**
Compatible to USB1.1/USB2.0 and capable to achieve high speed transfer at HighSpeed (480 Mbps).
- **USB HUB function**
This product has the USB HUB function. Max. 4 DIO-6464LX-USB can be used in 1 USB port of PC. *3 When you use 4 or more DIO-6464LX-USB, you can do by connecting DIO-6464LX-USB to the another USB port of PC side. Also, you can connect the CONTEC's USB device other than DIO-6464LX-USB to the USB port of DIO-6464LX-USB. *1*2.

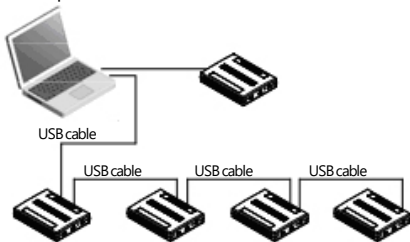

- **Common terminal provided per 16 channels**
Common terminal provided per 16 channels, capable of supporting a different external power supply.
- **Optocoupler bus isolation**
As the USB (PC) is isolated from the input and output interfaces by Optocouplers, this product has excellent noise performance.
- **You can use 16 input signals as interrupt request signals.**
You can use 16 input signals as interrupt request signals and also disable or enable the interrupt in bit units and select the edge of the input signals, at which to generate an interrupt.
- **This product has a digital filter to prevent wrong recognition of input signals from carrying noise or a chattering.**
This product has a digital filter to prevent wrong recognition of input signals from carrying noise or a chattering. All input terminals can be added a digital filter, and the setting can be performed by software.

This product is an USB2.0-compliant digital I/O unit used to provide a digital signal I/O function on a PC.

This product can input and output digital signals at 12 - 24VDC.

This product features 64 channels of Optocoupler isolated inputs (compatible with current sink output) and 64 channels of Optocoupler isolated open-collector outputs (current sink type). You can use 16 input signals as interrupt inputs. Equipped with the digital filter function to prevent wrong recognition of input signals and output transistor protection circuit (surge voltage protection and over current protection).

As there is compatible with PCI bus-compatible board

PIO-64/64L(PCI)H and PCI Express bus-compatible board

DIO-6464L-PE in terms of connector shape and pin assignments, it is easy to migrate from the existing system.

Windows driver is bundled with this product. Possible to be used as a data recording device for LabVIEW, with dedicated libraries.

- **Output circuits include zener diodes for surge voltage protection and polyswitches for overcurrent protection.**

Zener diodes are connected to the output circuits to protect against surge voltages. Similarly, polyswitches are fitted to each group of 8 channels outputs for over-current protection.

The output rating is max. 35VDC, 100mA per channel.

- **Connectors are compatible with PCI/PCI Express bus-compatible board**

As there is compatible with PIO-64/64L(PCI)H and DIO-6464L-PE in terms of connector shape and pin assignments, it is easy to migrate from the existing system. If the system of this product is created by the digital I/O driver API-DIO(98/PC), it is required to replace it with API-DIO(WDM).

- **Windows compatible driver libraries are attached.**

Using the attached digital I/O driver API-DIO(WDM) makes it possible to create applications of Windows. In addition, a diagnostic program by which the operations of hardware can be checked is provided.

- **LabVIEW is supported by a plug-in of dedicated library VI-DAQ.**

Using the dedicated library VI-DAQ makes it possible to make a LabVIEW application.

*1 Do not connect the device other than that of CONTEC's USB to the USB port included on the DIO-6464LX-USB. Otherwise, this may cause a failure or malfunction.

*2 When connecting multiple units with USB HUB function and set up them, do one at a time and complete setup for the previous unit before starting to do the next unit.

*3 This product cannot be stacked up for installation.

Packing List

Unit [DIO-6464LX-USB] ...1
AC adapter ...1
AC Cable (for 125VAC) ...1
USB cable (1.8m) ...1
USB cable attachment on the main unit's side
(For Mini B connector side) ...1
Clamps for prevention of cable on the main unit's side...1
CD-ROM *1 [API-USBP(WDM)] ...1
Power connector MC1,5/3-ST-3,5 ...1
First step guide ...1
Ferrite core ...1

*1 The CD-ROM contains the driver software and User's Guide.

Specification

Hardware specification

Item	Specification
Input section	
Number of input signal channels	64 channels (16 channels available for interrupts) (1 common in 16 channels unit)
Input format	Optocoupler isolated input (Compatible with current sink output) (Negative logic *1)
Input resistance	4.7k Ω
Input ON current	2.0mA or more
Input OFF current	0.16mA or less
Interrupt	16 interrupt input signals are arranged into a single output of interrupt request signal INTA. An interrupt is generated at the rising edge (HIGH-to-LOW transition) or falling edge (LOW-to-HIGH transition) (set by software).
Response time	200 μ sec within *2
Output section	
Number of output signal channels	64 channels (1 common in 16 channels unit)
Output format	Optocoupler isolated open collector output (current sink type) (Negative logic *1)
Output rating	Output voltage 35VDC (Max)
	Output current 100mA (per channel) (Max)
Residual voltage with output on	0.5V or less (Output current: 50mA), 1.0V or less (Output current: 100mA)
Surge protector	Zener diode RD47FM(NEC) or equivalent
Response time	200 μ sec within *2
USB section	
Bus specification	USB Specification 2.0/1.1 standard
USB transfer rate	12Mbps (Full-speed), 480Mbps (High-speed) *3
Power supply	Self-power
Common section	
Number of terminals used at the same time	127 terminals (Max) *4
Dielectric strength	250Vrms
External circuit power supply *5	12 - 24VDC (\pm 10%)
Current consumption (Max)	5VDC 550mA
Operating conditions *6	0 - 40°C, 10 - 90%RH (No condensation)
Allowable distance of signal extension	Approx. 50m (depending on wiring environment)
Physical dimensions (mm)	180(W) x 140(D) x 34(H) (No protrusions)
Weight	300g (Not including the USB cable, attachment)
Connector	100 pin 0.8mm pitch connector (F (female) type) x 2 HDRA-E100W1LFD11EC-SL+[HONDA TSUSHIN KOGYO CO., LTD.] or equivalent to it
Attached cable	USB cable 1.8m
Standard	VCCI Class A, FCC Class A, CE Marking (EMC Directive Class A, RoHS Directive), UKCA

*1 Data "0" and "1" correspond to the High and Low levels, respectively.

*2 The Optocoupler's response time comes.

*3 This depends on the PC environment used (OS and USB host controller).

*4 As a USB hub is also counted as one device, you cannot just connect 127 USB unit.

*5 External circuit power supply is required separately.

*6 To suppress the heating, ensure that there are spaces for ventilation (about 5cm) around this product.

AC adapter environmental condition (environmental specification)

Item	Specification
Input voltage range	90 - 264VAC
Rated input current	300mA
Number of frequency	50 - 60Hz
Rated output voltage	5.0VDC
Rated output current	2.0A (Max)
Dimension (mm)	47.5(W) x 75(D) x 27.3(H) (No protrusions)
Weight	175g
Operating temperature	0 - 40°C
Operating humidity	20 - 80%RH (No condensation)
Life expectancy	4 years at the ambient temperature 40 °C (When 100VAC is input and 1.3A is output)
Allowable time of short interruption	15ms (Max) (When 100VAC is input and 1.3A is output) *1
Floating dust particles	Not to be excessive
Corrosive gases	None
Voltage corresponding to the attached AC cable	125VAC 7A

*1 When the short interruption occurs and the defective operation of the equipment is generated, please insert the power supply of the equipment after pulling out it.

Support Software

Windows version of digital I/O driver API-DIO(WDM)

[Stored on the bundled CD-ROM driver library API-USBP(WDM)]

It is the library software, and which supplies command of hardware produced by our company in the form of standard Win32 API function (DLL). Using programming languages supporting Win32API functions, such as Visual Basic and Visual C++ etc., you can develop high-speed application software with feature of hardware produced by our company.

In addition, you can verify the operation of hardware using Diagnostic programs.

Data acquisition VI library for LabVIEW **VI-DAQ** (Available for downloading (free of charge) from the CONTEC web site.)

This is a VI library to use in National Instruments LabVIEW.

VI-DAQ is created with a function form similar to that of LabVIEW's Data

Acquisition VI, allowing you to use various devices without complicated settings.

See <https://www.contec.com/> for details and download.

Cable & Connector

Shielded Cable With Two 100pin Connector

: PCB100PS-0.5 (0.5m)

: PCB100PS-1.5 (1.5m)

: PCB100PS-3 (3m)

: PCB100PS-5 (5m)

Connection Conversion Shield Cable (100PD96P)

: PCB100/96PS-1.5 (1.5m)

: PCB100/96PS-3 (3m)

: PCB100/96PS-5 (5m)

Flat Cable with One 100-Pin Connector

: PCA100P-1.5 (1.5m)

: PCA100P-3 (3m)

Connection Conversion Shield Cable (100PD□□P D-SUB x 2)

: PCB100WS-1.5 (1.5m)

: PCB100WS-3 (3m)

: PCB100WS-5 (5m)

* If using both the CNA and CNB connectors, two cable sets are required.

Accessories

Screw Terminal Unit (M3 x 100P)

: EPD-100A *1*4*6

Screw Terminal Unit (M3 x 96P)

: EPD-96A *2*4*6

Screw Terminal Unit (M3.5 x 96P)

: EPD-96 *2*4

Connector Conversion Board (96-Pin□37-Pin x 2)

: CCB-96 *2*4

Screw Terminal Unit (M3 x 37P)

: EPD-37A *3*5*6

Screw Terminal Unit (M3.5 x 37P)

: EPD-37 *3*5

General Purpose Terminal (M3 x 37P)

: DTP-3C *3*5

Screw Terminal (M2.5 x 37P)

: DTP-4C *3*5

AC adapter (input : 90 - 264VAC, output : 5VDC 2.0A)

: POA200-20-2 *7

USB I/O Unit Bracket for X Series

: BRK-USB-X

AC-DC power supply unit (input: 85 - 264VAC, output: 5VDC 5.0A)

: PWD-25AWD5

AC-DC power supply unit (input: 85 - 264VAC, output: 5VDC 2.0A)

: POW-AD22GY

DC-DC power supply unit (input: 10 - 30VDC, output: 5VDC 3.0A)

: POW-DD10GY

*1 PCB100PS optional cable is required separately.

*2 PCB100/96PS optional cable is required separately.

*3 PCB100WS optional cable is required separately.

*4 If using both the CNA and CNB connectors, two each of the terminal block and cable sets are required.

*5 If using both the CNA and CNB connectors, two cable sets are required.


You will also require sufficient terminal blocks for the number of I/O points you are using.

*6 "Spring-up" type terminal is used to prevent terminal screws from falling off.


*7 It is the same as the one appended to the product. Please buy it necessary for maintenance.

* Check the CONTEC's Web site for more information on these options.


Physical Dimensions

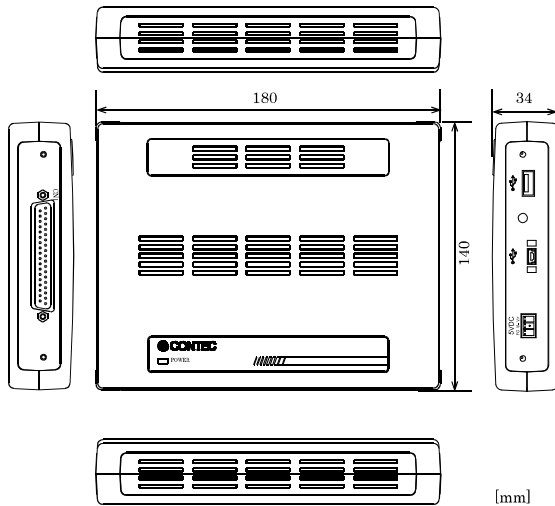

Physical dimensions of attached AC adapter (POA200-20-2)

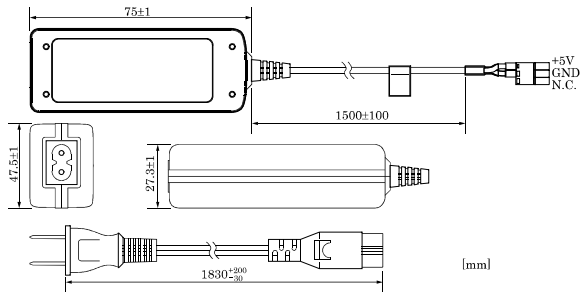

Block Diagram

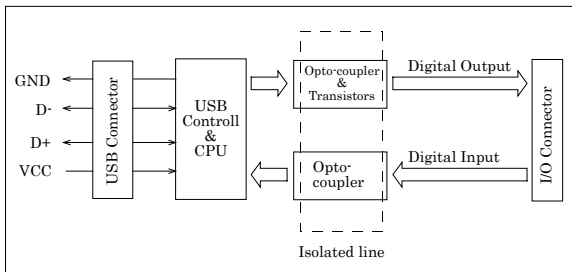


Connecting Input Signals

Connect the input signals to a device which can be current-driven, such as a switch or transistor output device.

The connection requires an external power supply to feed currents.

This product inputs the ON/OFF state of the current-driven device as a digital value.


Input Circuit

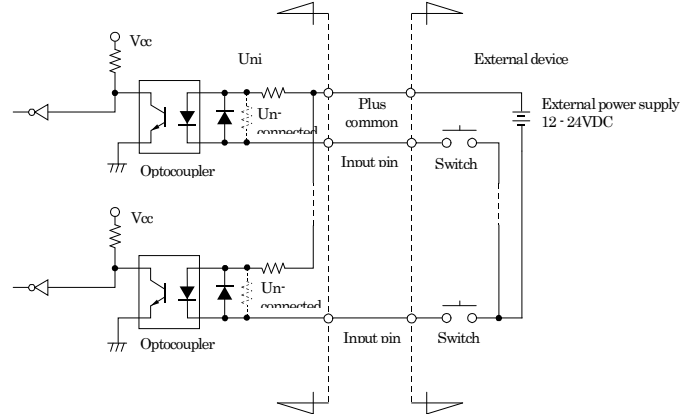

* I-xx represents the input pin.

The input circuits of interface blocks of this product is illustrated in Figure 3.5. The signal inputs are isolated by Optocouplers (compatible with current sink output). This product therefore requires an external power supply to drive the inputs. The power requirement for each input pin is about 5.1mA at 24VDC (about 2.6mA at 12VDC).

Connecting a Switch

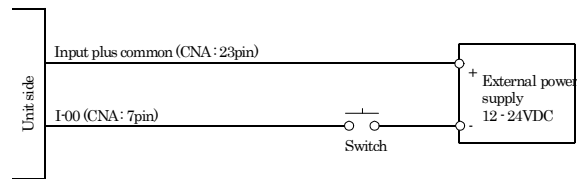

When the switch is ON, the corresponding bit contains 1.
When the switch is OFF, by contrast, the bit contains 0.


Connecting Output Signals

Connect the output signals to a current-driven controlled device such as a relay or LED.

The connection requires an external power supply to feed currents.

This product controls turning on/off the current-driven controlled device using a digital value.

Output Circuit

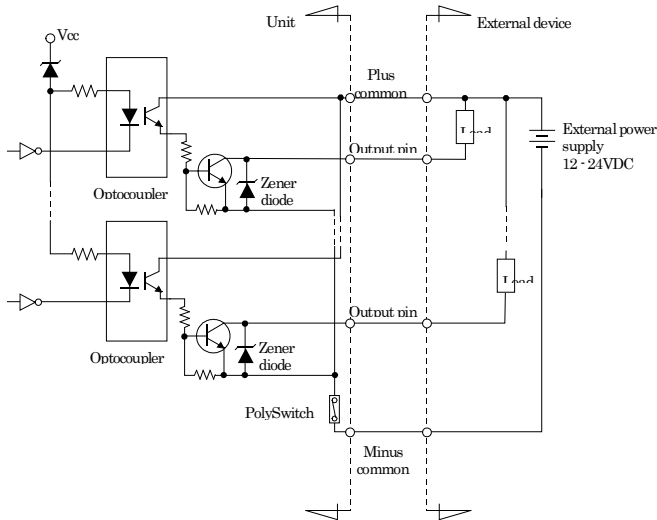

* O-xx represents the output pin.

The output circuits of interface blocks of this product is illustrated in the image above. The signal output section is an Optocoupler isolated, open-collector output (current sink type). Driving the output section requires an external power supply.

The rated output current per channel is 100mA at maximum.


The output section can also be connected to a TTL level input as it uses a low-saturated transistor for output. The residual voltage (low-level voltage) between the collector and emitter with the output on is 0.5V or less at an output current within 50mA or at most 1.0V at an output current within 100mA.

A zener diode is connected to the output transistor for protection from surge voltages. A PolySwitch-based overcurrent protector is provided for every 8 output transistors. When the overcurrent protector works, the output section of this product is temporarily disabled. If this is the case, turn off the power to the PC and the external power supply and wait for a few minutes, then turn them on back.

Caution


When the PC is turned on, all output are reset to OFF.

Connection to the LED

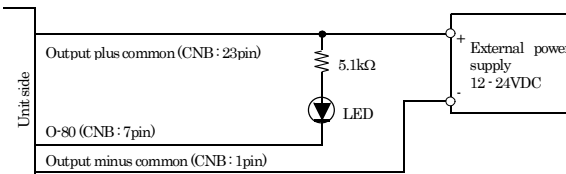


When "1" is output to a relevant bit, the corresponding LED comes on.
When "0" is output to the bit, in contrast, the LED goes out.

Example of Connection to TTL Level Input

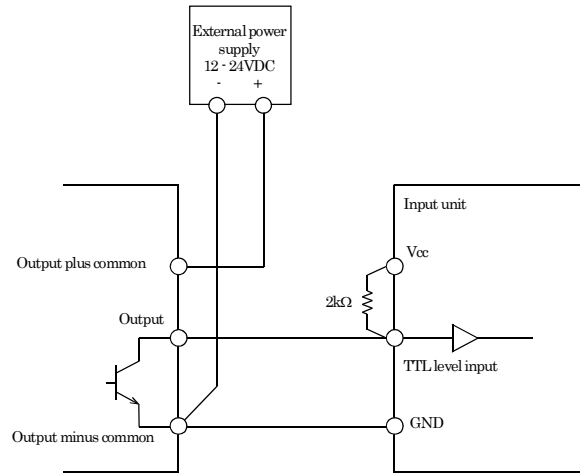

Connecting the Sink Type Output and Sink Output Support Input


The following example shows a connection between a sink type output (output side) and a sink output support input (input side). Refer to this connection example when you connect such this product to each other.

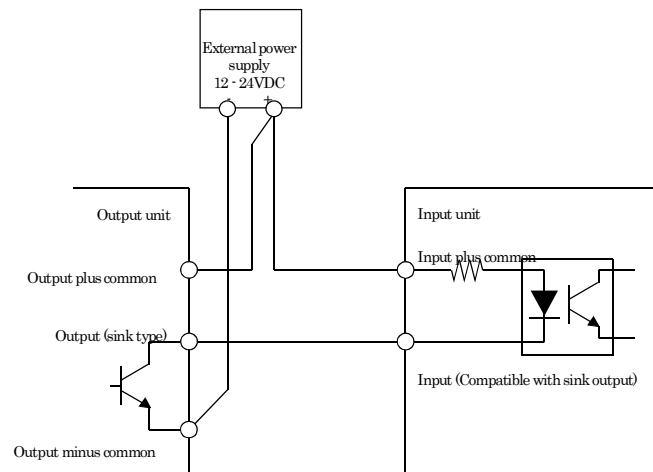

Using the Connectors

Connecting to a Connector

To connect an external device to this product, plug the cable from the device into the interface connector (CN1) of unit shown below.



- Connector used
HDRA-E100W1LFD1EC-SL+
[mfd by HONDA TSUSHIN KOGYO CO., LTD.]
or equivalent to it
- Applicable connector
HDRA-E100MA1
[mfd by HONDA TSUSHIN KOGYO CO., LTD.]

* Please refer to chapter 1 for more information on the supported cable and accessories.

Connector Pin Assignment

Pin Assignments of DIO-6464LX-USB Interface Connector (CNA, CNB)

Common plus pin for +E/+F output ports	P-E/F	100		50	P-A/B	Common plus pin for +A/+B output ports
	P-E/F	99		49	P-A/B	
+F port (Output)	O-F7	98		48	O-B7	+B port (Output)
	O-F6	97		47	O-B6	
	O-F5	96		46	O-B5	
	O-F4	95		45	O-B4	
	O-F3	94		44	O-B3	
	O-F2	93		43	O-B2	
	O-F1	92		42	O-B1	
+E port (Output)	O-F0	91		41	O-B0	+A port (Output)
	O-E7	90		40	O-A7	
	O-E6	89		39	O-A6	
	O-E5	88		38	O-A5	
	O-E4	87		37	O-A4	
	O-E3	86		36	O-A3	
	O-E2	85		35	O-A2	
Common minus pin for +E/+F output ports	O-E1	84		34	O-A1	Common minus pin for +A/+B output ports
	O-E0	83		33	O-A0	
	N-E/F	82		32	N-A/B	
	N-E/F	81		31	N-A/B	
	N-E/F	80		30	N-A/B	
	N-E/F	79		29	N-A/B	
	N-E/F	78		28	N-A/B	
	N-E/F	77		27	N-A/B	
	N-C	76		26	N-C	
	N-C	75		25	N-C	
				24	P-B/9	Common plus pin for +B/+9 output ports
Common plus pin for +C/+D output ports	P-C/D	74		23	P-B/9	
	P-C/D	73		22	O-B7	+9 port (Output)
+D port (Output)	O-D7	72		21	O-B6	
	O-D6	71		20	O-B5	
	O-D5	70		19	O-B4	
	O-D4	69		18	O-B3	
	O-D3	68		17	O-B2	
	O-D2	67		16	O-B1	
	O-D1	66		15	O-B0	
+C port (Output)	O-D0	65		14	O-B7	+8 port (Output)
	O-C7	64		13	O-B6	
	O-C6	63		12	O-B5	
	O-C5	62		11	O-B4	
	O-C4	61		10	O-B3	
	O-C3	60		9	O-B2	
	O-C2	59		8	O-B1	
Common minus pin for +C/+D output ports	O-C1	58		7	O-B0	Common minus pin for +B/+9 output ports
	O-C0	57		6	N-B/9	
	N-C/D	56		5	N-B/9	
	N-C/D	55		4	N-B/9	
	N-C/D	54		3	N-B/9	
	N-C/D	53		2	N-B/9	
	N-C/D	52		1	N-B/9	
	N-C/D	51				

* I-00 - I-17 can be used as interrupt signal.


I-00 - I-77	64 input signal pins. Connect output signals from the external device to these pins.
O-80 - O-F7	64 output signal pins. Connect these pins to the input signal pins of the external device.
P-0/1 - P-6/7	Connect the positive side of the external power supply. These pins are common to 16 input signal pins.
P-8/9 - P-E/F	Connect the positive side of the external power supply. These pins are common to 16 output signal pins.
N-8/9 - N-E/F	Connect the negative side of the external power supply. These pins are common to 16 output signal pins. One pin permissible current of the connector is 0.3A. Please connect necessary number of pins for the corresponding total current of the output 16 channels. When 16 channels are used by the output full ratings (100mA per 1 channel), it is necessary to connect six all.
N.C.	This pin is left unconnected.

Pin assignments for connecting to the PCB100/96PS or PCB100WS

The figure below shows the correspondence between the option cable pins and signals.


< Pin assignments for connecting a PCB100/96PS or PCB100WS to the DIO-6464LX-USB >

PCB100/96PS



Common minus pin for +C/+D output ports	N-C/D	B01	<p>For connecting the board CNB</p>	A01	N-8/9	Common minus pin for +8/+9 output ports	Unconnected	NC	B01	<p>For connecting the board CNA</p>	A01	NC	Unconnected
	N-C/D	B02		A02	N-8/9						NC	B02	
+C port (Output)	O-C0	B03		A03	O-80	+8 port (Output)	+4 port (Input)	I-40	B03		A03	I-00	+0 port (Input)
	O-C1	B04		A04	O-81			I-41	B04		A04	I-01	
	O-C2	B05		A05	O-82			I-42	B05		A05	I-02	
	O-C3	B06		A06	O-83			I-43	B06		A06	I-03	
	O-C4	B07		A07	O-84			I-44	B07		A07	I-04	
	O-C5	B08		A08	O-85			I-45	B08		A08	I-05	
	O-C6	B09		A09	O-86			I-46	B09		A09	I-06	
	O-C7	B10		A10	O-87			I-47	B10		A10	I-07	
+D port (Output)	O-D0	B11		A11	O-90	+9 port (Output)	+5 port (Input)	I-50	B11		A11	I-10	+1 port (Input)
	O-D1	B12		A12	O-91			I-51	B12		A12	I-11	
	O-D2	B13		A13	O-92			I-52	B13		A13	I-12	
	O-D3	B14		A14	O-93			I-53	B14		A14	I-13	
	O-D4	B15		A15	O-94			I-54	B15		A15	I-14	
	O-D5	B16		A16	O-95			I-55	B16		A16	I-15	
	O-D6	B17		A17	O-96			I-56	B17		A17	I-16	
	O-D7	B18		A18	O-97			I-57	B18		A18	I-17	
Common plus pin for +C/+D output ports	P-C/D	B19	A19	P-8/9	Common plus pin for +8/+9 output ports	Common plus pin for +4/+5 input ports	P-4/5	B19	A19	P-0/1	Common □ plus pin □ for +0/+1 □ input ports		
	P-C/D	B20	A20	P-8/9			P-4/5	B20	A20	P-0/1			
Unconnected	NC	B21	A21	NC	Unconnected	Unconnected	NC	B21	A21	NC	Unconnected		
	NC	B22	A22	NC			NC	B22	A22	NC			
	NC	B23	A23	NC			NC	B23	A23	NC			
	NC	B24	A24	NC			NC	B24	A24	NC			
	NC	B25	A25	NC			NC	B25	A25	NC			
	NC	B26	A26	NC			NC	B26	A26	NC			
	NC	B27	A27	NC			NC	B27	A27	NC			
	NC	B28	A28	NC			NC	B28	A28	NC			
Common minus pin for +E/+F output ports	N-E/F	B29	A29	N-A/B	Common minus pin for +A/+B output ports	+6 port (Input)	NC	B29	A29	NC	+2 port (Input)		
	N-E/F	B30	A30	N-A/B			NC	B30	A30	NC			
+E port (Output)	O-E0	B31	A31	O-A0	+A port (Output)	+7 port (Input)	I-60	B31	A31	I-20	+3 port (Input)		
	O-E1	B32	A32	O-A1			I-61	B32	A32	I-21			
	O-E2	B33	A33	O-A2			I-62	B33	A33	I-22			
	O-E3	B34	A34	O-A3			I-63	B34	A34	I-23			
	O-E4	B35	A35	O-A4			I-64	B35	A35	I-24			
	O-E5	B36	A36	O-A5			I-65	B36	A36	I-25			
	O-E6	B37	A37	O-A6			I-66	B37	A37	I-26			
	O-E7	B38	A38	O-A7			I-67	B38	A38	I-27			
+F port (Output)	O-F0	B39	A39	O-B0	+B port (Output)		I-70	B39	A39	I-30			
	O-F1	B40	A40	O-B1			I-71	B40	A40	I-31			
	O-F2	B41	A41	O-B2			I-72	B41	A41	I-32			
	O-F3	B42	A42	O-B3			I-73	B42	A42	I-33			
	O-F4	B43	A43	O-B4			I-74	B43	A43	I-34			
	O-F5	B44	A44	O-B5			I-75	B44	A44	I-35			
	O-F6	B45	A45	O-B6			I-76	B45	A45	I-36			
	O-F7	B46	A46	O-B7			I-77	B46	A46	I-37			
Common plus pin for +E/+F output ports	P-E/F	B47	A47	P-A/B	Common plus pin for +A/+B output ports	Common plus pin for +6/+7 input ports	P-6/7	B47	A47	P-2/3	Common □ plus pin □ for +2/+3 □ input ports		
	P-E/F	B48	A48	P-A/B			P-6/7	B48	A48	P-2/3			

* [] shows pin numbers specified by HONDA TSUSHIN KOGYO CO., LTD.

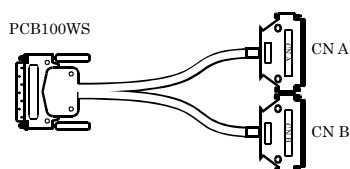
[illegible]

Connection with 5VDC Power Supply for Self-power

This product must be connected with 5VDC power supply (in a self-powered state).
Connect with 5VDC power supply by using +5VDC input pin.

5VDC


FG Vi- Vi+



Vi+ Power supply (5V)
Vi- Power supply (GND)
FG Frame ground

When using the attached AC adapter [POA200-20-2], please connect directly to the input terminals.

When the accompanying power connector (MC1,5/3-ST-3,5, suitable cable: AWG28 - 16) is used to supply power to this unit, strip the end of the suitable cable and insert it to the power connector before firmly securing it using a screw.



When a power supply for installation on a DIN rail is used, connect the unit using the accompanying power connector MC1.5/-ST-3.5.

Caution

- Connect 5VDC power supply to the main unit. Next, connect the USB cable to the PC. Do not turn it on or off when using. If you remove, USB cable is first and then 5VDC power supply.
- When the USB module is not used, leave the AC adapter unplugged.
- Continuously using the AC adapter heated affects its life.
- Use the AC adapter not in a closed place but in a well-ventilated place not to be heated.
- Do not remove the power connector [MC1,5/3-ST-3,5] attached to the AC adapter.

Difference from DIO-6464L-PE and PIO-64/64L(PCI)H

Item	DIO-6464LX-USB	DIO-6464L-PE	PIO-64/64L(PCI)H
Operating conditions	0 ~ 40 °C, 10 ~ 90%RH (No condensation)	0 ~ 50°C, 10 ~ 90%RH (No condensation)	0 ~ 50°C, 10 ~ 90%RH (No condensation)
Current consumption (Max)	5VDC 550mA	3.3VDC 600mA	5VDC 500mA
Bus specification	USB Specification 2.0/1.1 standard	PCI Express Base Specification Rev. 1.0a x1	PCI(32bit, 33MHz, Universal key shapes supported)
Physical dimensions (mm)	180(L) × 140(D) × 34(H) (No protrusions)	169.33(L) × 110.18(H)	176.41(L) × 106.68(H)
Weight	300g (Not including the USB cable attachment)	215g	215g