

Z-Line

Multistandard Signal Converters & Isolators


Z-Line Series offers a full range of signal conditioners including analog/digital/serial converters, temperature transmitters, galvanic isolators, splitters, trip amplifiers and math modules. They work at 10-40 Vdc/ 19-28 Vac, 85-265 Vac/dc or are supplied by the loop.

Z-Line modules ensure from 1.500 Vrms to 4.000 Vrms isolation voltage for 1 minute at three points. They also supply the transducer and can have active/passive input/output and they are designed to be mounted on DIN 46277 rail.




**UNIVERSAL
POWER SUPPLY**

Vac/dc switching;
loop powered




**POWER
TRANSDUCERS**

Min 20 Vdc




**POWER
CONSUMPTION**

< 2,5 W




**MULTI-POINT HIGH
ISOLATION**

From 1,5 kVac
up to 4kVac



**ACCURACY
CLASS**

up to 0,1%



**STANDARD
SIGNALS**

mA, mV, A, V, Ohm, RTD,
TC, load cell, Reed, Pnp,
Npn, Hall effect sensor,
Photoelectric sensor,
pulse 24V



STRENGTH

Operating temperature
up to -20...+65%, RH
90%




RELIABILITY

MTBF>500.000 h



APPROVALS

CE UL US
LISTED
CUL US



**COMPACT
SIZE**

Width 17.5 mm /35 mm



SENECA Z-Line offers three setting options. Almost all of the existing models allows configuration of standard parameters using the dip switches on board. In addition to the standard configuration some models can be configured for wider functionalities by using the PC software "EASY SETUP". Moreover, certain models are equipped with a frontal Micro USB port for an easier configuration through "EASY SETUP APP", a specific App for Android.

FLEXIBLE CONFIGURATION

DIP Switch



Software EASY SETUP



EASY SETUP APP



ANALOG CONVERTERS

	Z109REG	Z109REG2-1	Z109REG2-H
	  Universal isolator/converter	    Universal isolator/converter with advanced functions	  High performance universal converter, 85-265 V
GENERAL DATA			
Power Supply	10..40 Vdc; 19..28 Vac; (50..60 Hz)	9..40 Vdc; 19..28 Vac; (50..60 Hz)	85..265 Vac/dc
Power transducers	Active input 2 wire (min 18 Vdc)	Active input 2 wire (min 20 Vdc)	Active input 2 wire (min 20 Vdc)
Power Consumption	2.5 W	2.5 W (max) 1.6 W (24 Vdc, 20 mA)	2.5 W (max) 1.6 W (24 Vdc, 20 mA)
Isolation	1.500 Vac, 3 way Against surge pulses 400W/ms	1.500 Vac, 3 way 3.750 Vac (power supply / input -output) Against surge pulses 400W/ms	1.500 Vac, 3 way 3.750 Vac (power supply / input -output) Against surge pulses 400W/ms
Status indicators	Power supply Error	Power supply Error Alarm	Power supply Error Alarm
Response time	35 ms	35 ms (11 bit)..140 ms (16 bit)	35 ms (11 bit)..140 ms (16 bit)
Interface	3,5mm front jack RS232 (COM)	Micro USB	3,5 mm front jack RS232 – COM
Accuracy	0,1%	0,1%	0,1%
Thermal drift	0.01%/°K	0.01%/°K	0.01%/°K
Linearity	0,05% (V.I), 0,2% (RTD), 1°C (TC)	0,05% / 0.4%	0,05% / 0.4%
Settings	Dip-switches Software (EASY SETUP)	Dip-switches Software / App (EASY SETUP)	DIP-switches Software (EASY SETUP)
Operating Temperature	-20..+60°C	-20..+60 °C	-20..+60 °C
Dimensions (w x h x d)	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm
Connections	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm²	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm²	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm²
Weight	200 g	200 g	200 g
Approvals	CE	CE- UL-UR CSA	CE
Norms	EN 50081-1, EN 50082-2, EN 61010-1	EN 61000-6-4 / 2002, EN 61000-2-2/2005 / EN 61010-1, EN 60742	EN 61000-6-4 / 2002, EN 61000-2-2/2005 / EN 61010-1, EN 60742
INPUT DATA			
Channels	1	1 analog 1 strobe	1 analog 1 strobe
Type	VOLTAGE Bipolar 0..2, 0..5, 0..10 V CURRENT Bipolar 0..20 mA RTD Pt100 (-200..+600°C) THERMOCOUPLE Tipo J, K, R, S, T, E, B, N POTENTIOMETER 0,5..15 kΩ	VOLTAGE Bipolar from 75 mV to 20 V Resolution 15 bit + sign CURRENT Bipolar up to 20 mA Resolution 1 µA RTD Pt100, Pt500, Pt1000, Ni100, KTY81, KTY84, NTC Measure 2, 3, 4 wires Range: -200..600 °C Resolution 0,1°C THERMOCOUPLE Type J, K, R, S, T, E, B, N Resolution 2,5 µV POTENTIOMETER: 500 Ω ..100 kΩ RHEOSTAT: 500 Ω ..25 kΩ STROBE: alternative to the relay output	VOLTAGE Bipolar from 75 mV to 20 V Resolution 15 bit + sign CURRENT Bipolar up to 20 mA Resolution 1 µA RTD Pt100, Pt500, Pt1000, Ni100, KTY81, KTY84, NTC Measure 2, 3, 4 wires Range: -200..600 °C Resolution 0,1°C THERMOCOUPLE Type J, K, R, S, T, E, B, N Resolution 2,5 µV POTENTIOMETER: 500 Ω ..100 kΩ RHEOSTAT: 500 Ω ..25 kΩ STROBE: alternative to the relay output
OUTPUT DATA			
Channels	1	1 analog, 1 relay	1 analog, 1 relay
Type	VOLTAGE 4 scales: 0..1, 0..5, 0..10, 2..10 V CURRENT 2 scales: 0/4..20 mA	VOLTAGE 4 scales: 0..1, 0..5, 0..10, 2..10 V Min load resistance: 2.000 Ω CURRENT 2 scales: 0/4..20 mA (active/passive) Max load resistance: 600 Ω RELAY Alternative to the strobe NC / NA in case of alarm	VOLTAGE 4 scales: 0..1, 0..5, 0..10, 2..10 V Min load resistance: 2.000 Ω CURRENT 2 scales: 0/4..20 mA (active/passive) Max load resistance: 600 Ω RELAY Alternative to the strobe NC / NA in case of alarm
ORDER CODES	Z109REG	Z109REG2-1	Z109REG2-H



Z109UI2-1	Z109REG-BP	Z109S-DI	Z109S
    DC Current/Voltage to DC Current/ Voltage isolator/converter	    Universal converter with isolated bipolar output	 Wide range Current Loop Isolator	  DC Current isolator
10..40 Vdc 19..28 Vac (50..60 Hz)	10..40 Vdc 19..28 Vac (50..60 Hz)	10..40 Vdc 19..28 Vac (50..60 Hz)	9..40 Vdc 19..28 Vac; (50..60 Hz)
Active input 2 wire (min 20 Vdc)	Active input 2 wire (17 Vdc)	Active input 2 wire (17 Vdc)	Active input 2 wire (min 20 Vdc)
2.5 W	2.5 W	2.5 W	2.5W
1.500 Vac, 3 way Against surge pulses 400W/ms	1.500 Vac, 3 way	3.500 Vac, 3 way	1.500 Vac, 3 way
Power supply	Power supply Error Alarm	Power supply	Power supply
35 ms (11 bit)..140 ms (16 bit)	35 ms (11 bit)..140 ms (16 bit)	< 200 us	< 60 ms
3,5mm front jack RS232 (COM) Micro USB	Micro USB	-	
0,1%	0,1%	0,2% or 10 uA	0,20%
0.01%/°K	0.01%/°K	0.02%/°K	0,02 % f.s. / °C
0,05 % (V.I), 0,01% (Vout)			0,05%
Dip-switches Jumper Software / App (EASY SETUP)	Dip-switches Software / App (EASY SETUP) Jumper		
-10..+60 °C	-20..+65°C	-20..+60°C	-20..+60°C
17,5 x 100 x 112 mm	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm
Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm ²	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm ²	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm ²	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm ²
200 g	200 g	200 g	200 g
CE- UL-UR CSA	CE	CE	CE - UL
EN 55011, EN 61000-4-2, EN 61000-4-4, EN 50140 / 141	EN 61000-6-2; EN 61000-6-4; EN 61010-1	EN 61000-6-2; EN 61000-6-4; EN 61010-1	EN 55011, EN 61000-4-2, EN 61000-4-4, EN 50140 / 141
1	1	1	1
VOLTAGE Bipolar da 75 mV a 20 V Resolution 15 bit + sign CURRENT Bipolar up to 20 mA Resolution 1 µA	VOLTAGE Bipolar from 75 mV to 20 V CURRENT Bipolar up to 20 mA RTD Pt100, Pt500, Pt1000, Ni100, KTY81,KTY84, NTC Measure 2,3, 4 wires THERMOCOUPLE Type J, K, R, S, T, E, B, N POTENTIOMETER: 500 Ω ..100 kΩ RHEOSTAT: 500 Ω..25 kΩ	CURRENT 0 - 20 mA or 4 - 20 mA	CURRENT 2 scales: 0/4..20 mA
1	1	1	1
VOLTAGE 4 scales: 0..1, 0..5, 0..10, 2..10 V Min load resistance: 2.000 Ω CURRENT 2 scales: 0/4..20 mA (active/passive) Max load resistance: 600 Ω	CURRENT -20 – +20 mA Maxium load resistance 500Ω VOLTAGE -10 – +10 V Minimum load resistance 1 k Ω	CURRENT 0 - 20 mA or 4 - 20 mA Max load 600 Ω	CURRENT 2 scales: 0/4..20 mA Max resistance load: 600 Ω
Z109UI2-1	Z109REG-BP	Z109S-DI	Z109S

ANALOG CONVERTERS


	Z102	Z110S	Z110D	Z170REG-1
				
	Potentiometer to DC current / voltage isolator / converter	DC current insulator (self-powered) single channel	DC current insulator (self-powered) double channel	DC duplicator isolator with universal input, 2-CH output, micro USB
GENERAL DATA				
Power Supply	9..30 (option) - 19..40 Vdc; 19..28 Vac	Self-powered by input loop	Self-powered by input loop	10..40 Vdc; 19..28 Vac
Power transducers				Yes, max 25 mA, 17 Vdc
Power consumption (max)	2,5 W			0,5..2 W
Isolation	1.500 Vac (3 ways)	1.500 Vac	1.500 Vac	1.500 Vac (4 vie)
Protection degree	IP20	IP20	IP20	IP20
LED status indicators	Power Supply			Power Supply Alarm
Response time	< 40 ms	< 100 ms	< 100 ms	< 25 ms
Interface				Micro USB
PLC communication				
Accuracy class	0,2%	0,1%	0,1%	0,1%
Thermal Drift	0,02 % f.s. / °C	0,02 % f.s. / °C	0,02 % f.s. / °C	0,01% /K
Linearity	0,05%	0,1 % f.s.	0,1 % f.s.	<1% (input), 0.01% (output)
Settings	DIP switch			DIP switch Software (EASY SETUP) App (EASY SETUP)
Operating temperature	0..+50°C	0..+50°C	0..+50°C	-10..+65°C
Dimension	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm
Connection	Removable 3-way screw terminals, 5 mm pitch, cable section 0,25-2,5 mm ²	Removable 3-way screw terminals, 5 mm pitch, cable section 0,25-2,5 mm ²	Removable 3-way screw terminals, 5 mm pitch, cable section 0,25-2,5 mm ²	Removable 3-way screw terminals, 5 mm pitch, cable section 0,25-2,5 mm ²
Case	Nylon 6 30% glass fiber	Nylon 6 30% glass fiber	Nylon 6 30% glass fiber	Nylon 6 30% glass fiber
Mounting	35 mm DIN rail (IEC/EN 60715)	35 mm DIN rail (IEC/EN 60715)	35 mm DIN rail (IEC/EN 60715)	35 mm DIN rail (IEC/EN 60715)
Weight	200 g	200 g	200 g	200 g
Approvals	CE	CE	CE	CE, UL
Norms	EN 61000-6-4, EN 61000-6-2, EN 61010-1	EN 61000-6-4, EN 61000-6-2, EN 61010-1	EN 61000-6-4, EN 61000-6-2, EN 61010-1	EN 61000-6-4, EN 61000-6-2, EN 61010-1
INPUT DATA				
Channels	1	1	2	1
Type	• RHEOSTAT 2 wires: 0..300 Ω (I=6mA); 0..500 Ω (I=3,6 mA); 0..1 K Ω (I=1,8 mA) • POTENTIOMETER 3 wires: Vref=1,8 Vcc, from 200 Ω to 1 M Ω	• CURRENT (mA) 4..20 mA	• CURRENT (mA) 4..20 mA	• VOLTAGE (V) settable scale: 0..10 V • CORRENT (mA): settable scale: 0..20 mA (active/passive module) • POTENTIOMETER settable scale: 1 kΩ ..100 kΩ • THERMOCOUPLE: J,K,R,S,T,B,E,N • THERMORESISTANCE: Pt100, Pt500, Pt1000, Ni100 Resolution 14 bit Settable sampling time from 5 to 20 ms
OUTPUT DATA				
Channels	1	1	2	2
Type	• VOLTAGE (V) 4 scale: 0..5, 1..5, 0..10, 0..10 V Load impedance > 2,5 K Ω • CURRENT (mA) 2 scales: 0..20, 4..20 mA Loop impedance < 600 Ω	• CURRENT (mA) 4..20 mA	• CURRENT (mA) 4..20 mA	• VOLTAGE (V) settable scale: 0..10 V • CURRENT (mA) settable scale: 0..20 mA (active/passive) Resolution 14 bit
ORDER CODES	Z102	Z110S	Z110D	Z170REG-1

A/D CONVERTERS

Z190	Z-SG	Z-4AI-D	Z-4TC-D
			
DC current / voltage adder subtracter	Strain gauge DC current / voltage isolator / converter	4-CH DC current / voltage A/D converter	4-CH DC thermocouple A/D converter
9..30 (option) - 19..40 Vdc; 19..28 Vac Yes, active input 2 wires (min 20 vdc) 2,5 W 1.500 Vac (3 vie) IP20 Power Supply Error Data transmission Data receiving < 10 ms Front panel 3,5 mm jack, S232 (COM) IDC10 ModBUS RTU RS485 0,2% 0,02% f.s./°C 0,05% DIP switch 0..+50°C 17,5 x 100 x 112 mm Removable 3-way screw terminals, 5 mm pitch, cable section 0,25-2,5 mm ² Nylon 6 30% glass fiber 35 mm DIN rail (IEC/EN 60715) 200 g CE EN 61000-6-4, EN 61000-6-2, EN 61010-1	10..40 Vdc; 19..28 Vac 2 W 1.500 Vac (3 vie) IP20 Power Supply Error Data transmission Data receiving < 10 ms Front panel 3,5 mm jack, S232 (COM) IDC10 ModBUS RTU RS485 0,01% 0,0025 % f.s. / °C 0,01% DIP switch Software (EASY SETUP) -10..+65°C 17,5 x 100 x 112 mm Removable 3-way screw terminals, 5 mm pitch, cable section 0,25-2,5 mm ² Nylon 6 30% glass fiber 35 mm DIN rail (IEC/EN 60715) 200 g CE EN 61000-6-4, EN 61000-6-2, EN 61010-1	9..30 (option) - 19..40 Vdc; 19..28 Vac 2,5 W 1.500 Vac (3 ways) IP20 Power Supply RST Signal status Data transmission Data receiving Front panel 3,5 mm jack, RS232 (COM) Synchronous serial 3 wires: Clock, Data, Strobe, standard levels @24V pnp 0..+50°C 17,5 x 100 x 112 mm Removable 3-way screw terminals, 5 mm pitch, cable section 0,25-2,5 mm ² Nylon 6 30% glass fiber 35 mm DIN rail (IEC/EN 60715) 200 g CE, UL EN 61010-1, EN 50081-2, EN 50082-2, EN 60742, IEC 61131	9..30 (option) - 19..40 Vdc; 19..28 Vac 2 W 1.500 Vac (3 ways) IP20 Power Supply RST Signal status Data transmission Data receiving Front panel 3,5 mm jack, RS232 (COM) Synchronous serial 3 wires: Clock, Data, Strobe, standard levels @24V pnp 0..+50°C 17,5 x 100 x 112 mm Removable 3-way screw terminals, 5 mm pitch, cable section 0,25-2,5 mm ² Nylon 6 30% glass fiber 35 mm DIN rail (IEC/EN 60715) 200 g CE, UL EN 61010-1, EN 50081-2, EN 50082-2, EN 60742, IEC 61131
2 VOLTAGE (V) 4 scales: 0..1, 0..5, 0..10, 2..10 V, input impedance 500 kΩ CURRENT (mA) 2 scales: 0/4..20 mA Active connection: loop powered 20 Vdc non stabilized Passive connection: input impedance 100 Ω	1 analog, 1 digital • ANALOG Load cell (strain gauge), 4 / 6 wires connection, min 87 Ω for 1..4 load cells (350 Ω) or 1..8 load cells (1.000 Ω); Sensitivity: 1..64 mV/V • DIGITAL Tare calibration	4 • VOLTAGE (V) 2..10 V f.s. Resolution 16.000 points Impedance: 100 kΩ • CURRENT (mA) ±20 mA (bipolar) Resolution 16.000 points Impedance: 100 kΩ	4 • VOLTAGE (V) ±80mV Impedance: 10 MΩ • THERMOCOUPLE Type J,K,R,S,T,E,B,N
1 • VOLTAGE (V) 4 scales: 0..5, 0..10, 1..5, 2..10 V, min load resistance 2 kΩ • CURRENT (mA) 2 scales: 0/4..20 mA Active / passive connection (max loop impedance 600 Ω)	1 analogico, 1 digitale • CURRENT (mA) 0..20, 4..20 mA • VOLTAGE (V) 0..10, 0..5 Vdc • DIGITAL Weight limit threshold		
Z190	Z-SG	Z-4AI-D	Z-4TC-D

ELECTRIC METER CONVERTERS

	Z201	Z201-H	Z202
			
	AC Current isolator converter, 10..40 Vdc;19..28Vac	AC Current isolator converter, 85..265 V	AC Voltage isolator converter, 10..40 Vdc;19..28Vac
GENERAL DATA			
Power Supply	10..40 Vdc; 19..28 Vac	85..265 Vac/dc	10..40 Vdc; 19..28 Vac
Power Consumption	< 2,5 W	< 2,5 W	< 1,5 W
Isolation	3750 Vac input/output and input/power supply; 1500 Vac output/power supply.	4000 Vac input/power supply; 4000 Vac output/power supply.	3750 Vac input/output and input/power supply; 1500 Vac output/power supply.
Status indicators	Power supply	Power supply	Power supply
Interface			
Response time	<200ms	<100ms.	30ms.
Accuracy	0,3%	0,3%	0,25%
Thermal drift	+200 ppm/K	+200 ppm/K	+150 ppm/K
Operating Temperature	0..+55°C	-10..+65°C	0..+60°C
Dimensions (w x h x d)	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm
Connections	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm ²	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm ²	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm ²
Weight	200 g	200 g	200 g
Settings	Dip-switch Jumper (Output range)	Dip-switch Jumper (Output range)	Dip-switch Jumper (Output range)
Approvals	CE	CE	CE
Norms	EN 61000-6-4, EN 61000-6-2, EN 61010-1, EN 60742, IEC 61131	EN 61000-6-4, EN 61000-6-2, EN 61010-1, EN 60742, IEC 61131	EN 60688+A1+A2, EN 61000-6-4, EN 61000-6-2, EN 61010-1, EN 60742, IEC 61131
INPUT DATA			
Nr	1	1	1
Type	AC CURRENT 0..5 / 0..10 A ac	AC CURRENT 0..5 / 0..10 A ac	AC VOLTAGE 0..500 Vac Input impedance: 2000 Ω /V Frequency: 10 Hz..1 kHz
OUTPUT DATA			
Channels	1	1	1
Type	CURRENT Active or passive: 0..20 mA or 4..20 mA * Maximum load resistance 600 Ohm VOLTAGE 0..5 V, 1..5 V, 0..10 V, 2..10 V Minimum load resistance: 2500 Ohm	CURRENT Active or passive: 0..20 mA or 4..20 mA * Maximum load resistance 600 Ohm VOLTAGE 0..5 V, 1..5 V, 0..10 V, 2..10 V Minimum load resistance: 2500 Ohm	CURRENT Active or passive: 0..20 mA or 4..20 mA Maximum load resistance 600 Ohm VOLTAGE 0..5 V, 1..5 V, 0..10 V, 2..10 V Minimum load resistance: 2500 Ohm
ORDER CODES	201	Z201-H	Z202

Z202-H	Z202-LP	Z203-2	Z204-1
			
AC Voltage isolator converter, 85..265 V	AC/DC Voltage isolator converter, loop powered	Single phase power meter	AC/DC voltage isolator converter TMRS
85..265 Vac/dc	Self-powered from the input loop	10..40 Vdc 19..28 Vac (50..60 Hz)	10..40 Vdc 19..28 Vac (50..60 Hz)
< 1,5 W	< 1mA	< 2,5 W	1 W
4.000 Vac input/power supply	4000 Vac input/output	3750 Vac input/output/power supply	4000 Vac input/power supply and input/output
4.000 Vac output/power supply	Power supply	Power Supply, Error, RS485 communication	1500 Vac output/power supply
Power supply		Power Supply, Error, RS485 communication	Power Supply, Error, RS485 communication
		RS485 (backplane), 1200..115200 Baud bps, ModBUS RTU protocol	RS485 (backplane), 1200..115200 Baud bps, ModBUS RTU protocol
		Micro USB front for programming (baud rate, address, parity, data bits/stops)	RS232 (jack stereo 3.5 mm front connector for configuration): baud rate, address, parity, data/stop bit
<100ms.	< 100 ms	< 10 ms	For a step variation: 1s from 10 to 90 %.
0,3%	0,3%	0,5%	0,5% input; 0,1% outputs.
+150 ppm/K	+150 ppm/K	+150 ppm/K	+100 ppm/K
-10..+65°C	-20..+65°C	-10..+65°C	-20..+65°C
17,5 x 100 x 112 mm	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm	35 x 100 x 112 mm
Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm²	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm²	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm²	Removable 3-way screw terminals, 5 mm pitch. Standard 4 mm banana sockets
		RS485 bus connection	RS485 bus connection
200 g	140 g	140 g	Frontal jack 3.5 mm for module configuration
Dip-switch	Dip-switch (Input range)	Dip-switch (address, baud rate, line terminator, input range)	Dip-switch (address, baud rate, line terminator, input range)
Jumper (Output range)		EASY-SETUP (Plug&Play software)	EASY-SETUP (Plug&Play software)
CE	CE	CE - UL	CE
EN 60688+A1+A2, EN 61000-6-4, EN 61000-6-2, EN 61010-1, EN 60742, IEC 61131	EN 61000-6-4, EN 61000-6-2, EN 61010-1, EN 60742, IEC 61131	EN 61000-6-4, EN 61000-6-2, EN 61010-1, EN 60742, IEC 61131	EN 61000-6-4, EN 61000-6-2, EN 61010-1
1	1	1 (single phase load)	1
AC VOLTAGE 0..500 Vac Input impedance: 2000 Ω /V Frequency: 10 Hz..1 kHz	AC VOLTAGE 0..500 Vac DC VOLTAGE 0..540 Vdc Maximum Voltage 710 Vpk Frequency DC / 20 Hz..400 Hz	AC VOLTAGE Up to 500 Vac, frequency 35 to 75 Hz. AC CURRENT Input range: 5 Arms, Max peak factor 3, Max Current 15 A, Frequency 35 to 75 Hz.	DC VOLTAGE 0..1200 Vdc Input impedance 4 MΩ AC VOLTAGE 0..850 Vac Input impedance 4 MΩ Frequency 30Hz – 60Hz
1	1	1 analog, 1 digital	1
CURRENT Active or passive: 0..20 mA or 4..20 mA Maximum load resistance 600 Ohm	CURRENT Passive, 4..20 mA	CURRENT 0..20 mA, 4..20 mA, maximum load resistance 500 Ohm	CURRENT 0..20 mA, 4..20 mA, maximum load resistance 500 Ohm
VOLTAGE 0..5 V, 1..5 V, 0..10 V, 2..10 V Minimum load resistance: 2500 Ohm		VOLTAGE 0..10 Vdc, 0..5 Vdc, minimum load resistance 2000 Ohm	VOLTAGE 0..10 Vdc, 0..5 Vdc, minimum load resistance 2000 Ohm
		DIGITAL Passive digital Output for pulses (energy counter) 200ms	DIGITAL Passive digital Output for pulses (energy counter)
Z202-H	Z202-LP	Z203-2	Z204-1

RELAYS CONDITIONERS

	Z112A	Z112D	Z113S	Z113D	Z113T	Z113-1
						
	On/Off sensors digital amplifier, single channel	On/Off sensors digital amplifier, double channel	DC Current / Voltage alarm trip module, 1 relay output	DC Current / Voltage alarm trip module, 2 relay output	DC Current / Voltage alarm trip module, 3 relay output	Double threshold with universal analog input
GENERAL DATA						
Power Supply	19..40 (9..30 opt.) Vdc; 19..28 Vac; (50..60 Hz)	19..40 (9..30 opt.) Vdc; 19..28 Vac; (50..60 Hz)	19..40 (9..30 opt.) Vdc; 19..28 Vac; (50..60 Hz)	19..40 (9..30 opt.) Vdc; 19..28 Vac; (50..60 Hz)	19..40 (9..30 opt.) Vdc; 19..28 Vac; (50..60 Hz)	10-40 Vdc, 19-28 Vac (50 - 60 Hz)
Power transducers	Yes, active input 2 wire (min 20 Vdc)	Yes, active input 2 wire (min 20 Vdc)	Yes, active input 2 wire (min 20 Vdc)	Yes, active input 2 wire (min 20 Vdc)	Yes, active input 2 wire (min 20 Vdc)	Yes, active input 2 wire
Power Consumption	2.5 W	2.5 W	2.5 W	2.5 W	2.5 W	2.5 W
Isolation	1.500 Vac (power supply/input) 4.000 Vac (input/power supply/output)	1.500 Vac	1.500 Vac (power supply/input) 4.000 Vac (input/power supply/output)	1.500 Vac	1.500 Vac	1.500 Vac, 3 way
Status indicators	Power Supply Relay	Power Supply Relay	Power Supply Overtaking limit	Power Supply Overtaking limit	Power Supply Overtaking limit	Power supply Alarm
Interface						Micro USB frontal plug
Response time						
Accuracy	±0,01% /°C	±0,01% /°C	±0,01% /°C	±0,01% /°C	±0,01% /°C	0.01%/°K
Thermal drift						
Linearity			0,05%	0,05%	0,05%	
Settings	Dip-switches: input type, output retransmission, divider circuit settable from 1 to 256 Trimmer: pulse duration (100..500ms)	Dip-switches: input type, output retransmission, divider circuit settable from 1 to 256 Trimmer: pulse duration (100..500ms)	DIP switches: input type, functions (relays activation, min/max value alarm) Trimmer: Setpoint alarms (1..100% signal control) Delay (0,3..30 s) Hysteresis (2..15% of full-scale)	DIP switches: input type, functions (relays activation, min/max value alarm) Trimmer: Setpoint alarms (1..100% signal control) Delay (0,3..30 s) Hysteresis (2..15% of full-scale)	DIP switches: input type, functions (relays activation, min/max value alarm) Trimmer: Setpoint alarms (1..100% signal control) Delay (0,3..30 s) Hysteresis (2..15% of full-scale)	Dip-switches: input type, output, start scale, end scale. EASY SETUP software (all parameters))
Operating Temperature	0..+50 °C	0..+50 °C	0..+50 °C	0..+50 °C	0..+50 °C	-10...+65°C
Dimensions (w x h x d)	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm
Connections	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm²	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm²	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm²	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm²	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm²	Removable 3-way screw terminals, 5 mm pitch. cable section's 0.25-2.5 mm²
Weight	200 g	200 g	200 g	200 g	200 g	200 g
Approvals	CE	CE	CE	CE	CE	CE
Norms	EN 50081-1, EN 50082-2, EN 61010-1	EN 50081-1, EN 50082-2, EN 61010-1	EN 50081-1, EN 50082-2, EN 61010-1	EN 50081-1, EN 50082-2, EN 61010-1	EN 50081-1, EN 50082-2, EN 61010-1	EN61000-6-4; EN61000-6-2, EN 61010-1
INPUT DATA						
Channels	1	2	1	1	1	1
Type	PULSES Contact optoisolated Reed npn 2/3 wires- 12..24 Vdc, pnp 3 wires, power supply 24 Vdc Namur Pulses 24 Vdc Photoelectric sensor Hall effect sensor Max frequency 400 Hz	PULSES Contact optoisolated Reed npn 2/3 wires- 12..24 Vdc, pnp 3 wires, power supply 24 Vdc Namur Pulses 24 Vdc Photoelectric sensor Hall effect sensor Max frequency 10 Hz	CURRENT: 0..20, 4..20 mA active/passive Input impedance 100 Ω VOLTAGE: 0..5, 1..5, 0..10, 2..10 Vdc Input impedance : 500 KΩ	CURRENT: 0..20, 4..20 mA active/passive Input impedance 100 Ω VOLTAGE: 0..5, 1..5, 0..10, 2..10 Vdc Input impedance : 500 KΩ	CURRENT: 0..20, 4..20 mA active/passive Input impedance 100 Ω VOLTAGE: 0..5, 1..5, 0..10, 2..10 Vdc Input impedance : 500 KΩ	VOLTAGE up to 10 V Bipolar current up to 20 mA THERMORESISTANCE: Pt100, Pt500, Pt1000, Ni100 THERMOCOUPLE type: J,K,R,S,T,B,E,N POTENTIOMETER up to 100 kΩ
OUTPUT DATA						
Channels	1	2	1	2	3	2
Type	RELAY SPDT 1A – 30Vdc; 5A – 250Vac (resistive load)	RELAY SPST max load 5A – 250V (resistive load)	Relay SPDT, 1A - 30Vdc; 5A - 250Vac (resistive load)	Relay SPST, max load 0,1A - 30Vac/dc (10VA resistive load)	Relay SPST, max load 0,1A - 30Vac/dc (10VA resistive load)	RELAYS SPST N.O. position with common Max RELAY current 3 A@ 250V; 3 A@ 30V Max RELAY voltage 250 V CAT. II
ORDER CODES	Z112A	Z112D	Z113S	Z113D	Z113T	Z113-1

TEMPERATURE CONVERTERS

FREQUENCY CONVERTERS

	Z109PT2-1	Z109TC2-1	Z104	Z111
	    RTD to DC Current/Voltage isolator/converter	    TC to DC Current/Voltage isolator/converter	 DC current / voltage to frequency isolator / converter	  Frequency to DC current / voltage isolator / converter
GENERAL DATA				
Power Supply	9..40 Vdc 19..28 Vac; (50..60 Hz)	9..40 Vdc 19..28 Vac; (50..60 Hz)	19 - 40 Vdc, 19 - 28 Vac (50 - 60 Hz) supply of the sensor with 2-wire method: 20VDC stabilized	19 - 40 Vdc, 19 - 28 Vac (50 - 60 Hz)
Power transducers				
Power Consumption	2.5 W	2 W	2.5 W	2.5 W
Isolation	1.500 Vac, 3 way	1.500 Vac, 3 way	1.500 Vac, 3 way	1.500 Vac, 3 way
Status indicators	Power supply, Out of range, Setting error	Power supply, Out of range, Setting error	Power supply Output (relay)	Power Supply Error
Interface	Micro USB	Micro USB	-	-
Response time	140 ms Sampling frequency: 15 bits + sign resolution.	35 ms with 11 bit resolution, 140 ms with 16 bit resolution.	350 ms	250 ms
Accuracy	0,1% (RTD) – 0.3% (voltage output)	0,1% (TC) – 0.3% (voltage output)	0,20%	0,30%
Thermal drift	0.01%/°K	0.01%/°K	0,02 % f.s. / °C	0,01 % f.s. / °C
Settings	Dip-switches: range and input type; output selecting Software / App (EASY SETUP)	Dip-switches: range and input type; output selecting Software / App (EASY SETUP)	Dip-switches: input type, output, end scale Trimmer: end scale settings, integration constant	Dip-switches: input type, filter, pulses average, output Trimmer: end scale settings (1 Hz..10KHz)
Operating Temperature	-10..+60°C	-10..+60°C	0..+50 °C	0..+50 °C
Dimensions (w x h x d)	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm	17,5 x 100 x 112 mm
Connections	Removable 3-way screw terminals, 5 mm pitch, cable section's 0.25-2.5 mm ²	Removable 3-way screw terminals, 5 mm pitch, cable section's 0.25-2.5 mm ²	Removable 3-way screw terminals, 5 mm pitch, cable section's 0.25-2.5 mm ²	Removable 3-way screw terminals, 5 mm pitch, cable section's 0.25-2.5 mm ²
Weight	200 g	200 g	200 g	200 g
Approvals	CE- UL-UR CSA	CE- UL-UR CSA	CE	CE- UL-UR CSA
Norms	EN 55011, EN 61000-4-2, EN 61000-4-4, EN 50140 / 141	EN61000-6-4, EN61000-6-2, EN61010-1	EN50081-2, EN50082-2, EN61010-1	EN50081-2, EN50082-2 EN61010-1
INPUT DATA				
Nr	1	1	1	1
Type	RTD PT100, PT500, PT1000, NI100 2, 3 or 4 wires measurement, energising current 1 mA, resolution 0.1 °C	TC Type J, K, R, S, T, B, E, N; resolution 2.5 µV, automatic TC burn out detection, input impedance > 5MΩ	VOLTAGE: 0 - 5 Vdc, 1 - 5 Vdc, 0 - 10 Vdc and 2 - 10 Vdc Input impedance 1 MΩ CURRENT: 0 - 20 mA or 4 - 20 mA, both active and passive connection. Active connection : loop supply voltage approx. 15 Vdc Passive connection : input impedance 100 Ω	PULSES Mechanical contact, reed, npn with 2 and 3 wires , pnp with 3 wires and 24V DC power supply, Namur, photoelectric, "HALL" sensor, and variable reluctance. Maximum frequency 10 KHz
OUTPUT DATA				
Channels	1	1	1	1
Type	VOLTAGE: 0..5 V / 0..10 V / 1..5 V / 2..10 V, min load resistance 2 kΩ Resolution: 2.5 µA/ 1.25mV. CURRENT: 0..20 / 4..20 mA, max load resistance 600 Ω Resolution: 2.5 µA/ 1.25mV.	VOLTAGE: 0..5 V / 0..10 V / 1..5 V / 2..10 V, min load resistance 2 kΩ Resolution: 2.5 µA/ 1.25mV. CURRENT : 0..20 / 4..20 mA, max load resistance 600 Ω	PULSE Npn open-collector transistor 30 Vdc 300 mA Max frequency: 10 kHz Reed-relay 30 Vdc-ac 100 mA. Frequency below 40 Hz	VOLTAGE: 0..5 V / 0..10 V / 1..5 V / 2..10 V, Min. load resistance: 25 kΩ CURRENT: 0/4..20 mA (active/passive) Max load resistance: 600 Ω
ORDER CODES	Z109PT2-1	Z109TC2-1	Z104	Z111

SOFTWARE & ACCESSORIES

EASY SETUP

Plug&Play Software




Programmable modules:
Z109REG, Z109REG2-1, Z109UI-2, Z109REG-BP,
Z170REG-1, Z-SG, Z203-1, Z204-1, Z113-1,
Z109PT2-1, Z109TC2-1
Minimum hardware requirements:
CPU 1GHz, 256 MB available, graphic video
resolution 1024x768pixel
Free download: www.seneca.it

- Automatic connection to the module
- Operating and communication parameters setting
- Parameters monitoring
- Modules automatic configuration
- Configuration test and duplication

EASY SETUP APP

Configuration App for Android terminals



Programmable modules:
Z109REG2-1, Z109UI2-1,
Z109REG-BP, Z170REG-1, Z109PT2-1, Z109TC2-1
Android version: 4.0 or later
Supported terminals: Android Smartphone/with
OTG functions
Download: Google Play Store



- Automatic connection to the module
- Operating and communication parameters setting
- Parameters monitoring
- Modules automatic configuration
- Configuration test and duplication

S117P1

RS232/USB, TTL/USB and RS485/USB Asynchronous Serial Converter




- USB standard 1.0, 1.1 e 2.0 compatible.
- 12 Vdc @ 100 mA available from screw terminals to supply a Seneca module.
- Power supply through USB.
- Serial RS485 Communication, max 32 nodes.
- More S117P1 can be connected on the the same PC.
- Accessories: CD with drivers, USB cable, TTL cable + EASYLP (programming Software for loop powered device)

ORDER CODES

Code	Description
S117P1	RS232/USB, TTL/USB, RS485/USB asynchronous serial converter

LOAD CELL CONNECTION AND EQUALIZATION SYSTEM



ORDER CODES

Code	Description
SG-EQ4	Equalization and connection circuit up to 4 load cell in parallel
SG-EQ4-BOXPG7	Equalization and connection circuit up to 4 load cell in parallel + IP66 box including mm diameter cable glands 7 and 2 hole covers

Z-POWER

DIN RAIL 19 VAC TRANSFORMERS



Primary Voltage: 230 (115) Vac $\pm$ 10%
Case: Self-extinguish thermoplastic material (V-0 class)
Protection method: With thermofuse
Dimension: 3 DIN modules (15 VA version), 5 DIN modules (25 VA)
Protection degree: IP 40

ORDER CODES

Code	Description
Z-POWER 230-15VA	DIN rail 19 Vac transformers, 230-15 VA
Z-POWER 230-25VA	DIN rail 19 Vac transformers, 230-25 VA
Z-POWER 115-15VA	DIN rail 19 Vac transformers, 115-15 VA

Z-SUPPLY

Single-Phase Switching Power Supply 24V @ 1.5A




- **Input voltage range:** 110..230 Vac @ 47-63 Hz 0,7 A; 110..315 Vdc, 0,7 A
- **Output voltage:** 24 Vdc $\pm$ 2%
- **Redundancy:** Parallel connection of 2 Z-SUPPLY by IDC10 connector
- **Output current:** 1,5 A
- **Control output:** "Power Good" relay output
- **Internal fuse:** 1,25 A type T
- **Mounting:** On DIN 46277 rail
- **Isolation:** Up to 3 kV input

ORDER CODES

Code	Description
Z-SUPPLY	Single-phase switching power supply 24V @ 1.5A

CABLES




ORDER CODES

Code	Description
CS-JACK-DB9F	Programming serial cable (Jack / DB9F)
CU-A-MICROB	USB A – Micro USB-B 5P plug cable
CU-A-MICRO-OTG	Micro USB OTG – USB Type A F adapter cable

APPLICATION NOTE


Z109REG2-1

Analog signal conversion and retransmission with relay output

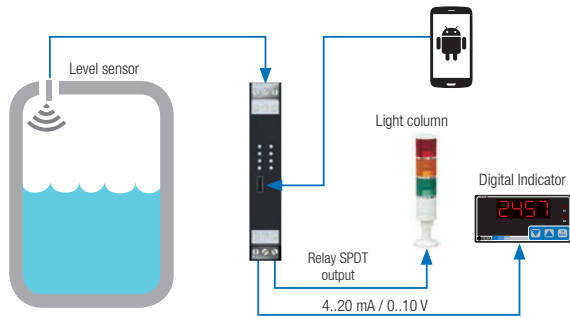


Z109REG2-1

Multiplexing and PLC signal retransmission

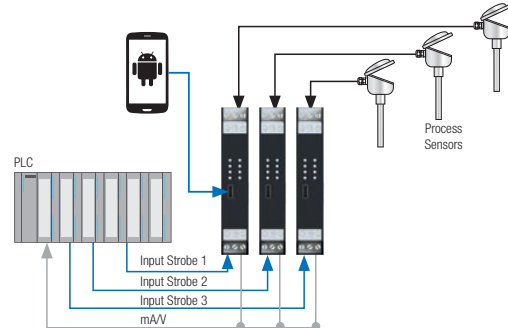


Z170REG-1

Analog signal Duplication and retransmission

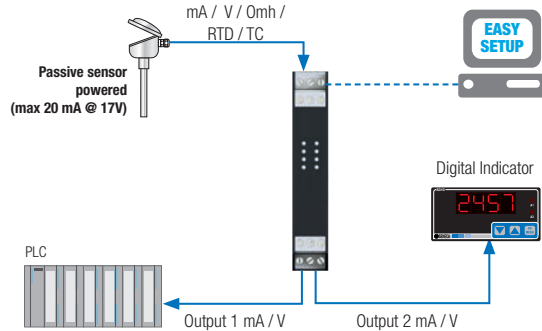


Z202

AC voltage conversion into a normalized signal mA / V

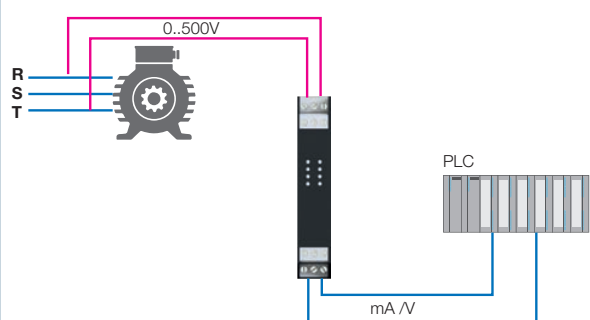


Z203-1

One phase power meter with signal output retransmission

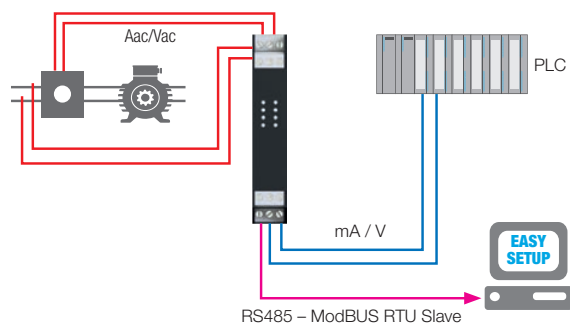


Z109PT2-1

RTD to mA/V standard output Signal temperature converter

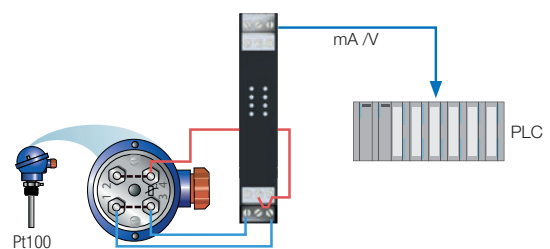


Z104

Flow meter pulse counter

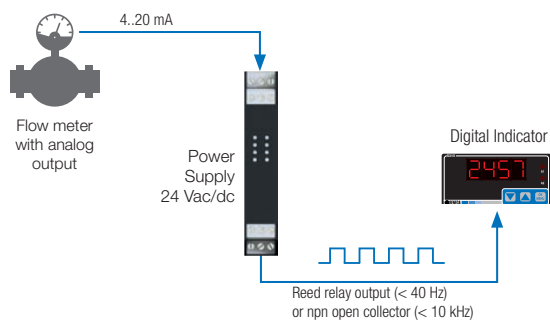

Z111

Acquisition of instantaneous flow (frequency signal)

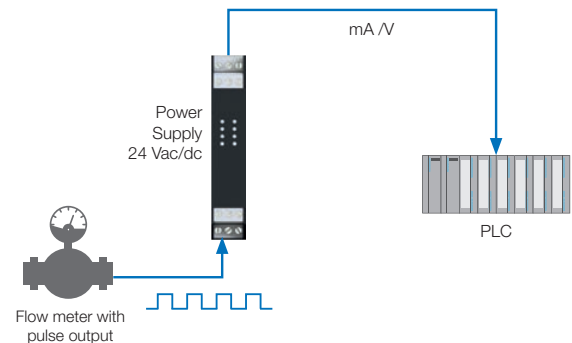

SELECTION GUIDE

INSTRUMENT CODE	CONVERSION				POWER SUPPLY					OTHER FEATURES	
	IN	OUT	NR. INPUT	NR. OUTPUT	19..40 Vdc (9..30 Vdc opz.); 19..28 Vac	10..40 Vdc; 19..28 Vac	85..265 Vac/dc	EXTERNAL / BY MEASURE LOOP	POWER TRANSDUCER (ACTIVE INPUT)	MAX ISOLATION	ACCURACY CLASS
ANALOG CONVERTERS											
Z102	Ohm	mA, V	1	1	x					1,5 kVac	0,2%
Z109REG	mA, mV, V, Ohm, TC (J,K,R,S,T,B,E,N), Pt100	mA, V	1	1	x				18 Vdc	1,5 kVac	0,2%
Z109REG2-1	mA, mV, V, Ohm, TC (J,K,R,S,T,B,E,N), Pt100, Pt500, Pt1000, Ni100, KTY81, KTY84, NTC, (Strobe)	mA, V, (Relay SPST)	2	2		x			20 Vdc	1,5 kVac	0,1%
Z109REG2-H	mA, mV, V, Ohm, TC (J,K,R,S,T,B,E,N), Pt100, Pt500, Pt1000, Ni100, KTY81, KTY84, NTC, (Strobe)	mA, V, (Relay SPST)	2	2			x		20 Vdc	1,5 kVac	0,1%
Z109REG-BP	mA, mV, V, Ohm, TC (J,K,R,S,T,B,E,N), Pt100, Pt500, Pt1000, Ni100, KTY81, KTY84, NTC	mA, V	1	1		x			17 Vdc	1,5 kVac	0,1%
Z109S	mA	mA	1	1	x				20 Vdc	1,5 kVac	0,2%
Z109S-DI	mA	mA	1	1		x			17 Vdc	3,5 kVac	0,2%
Z109UI2-1	mA, V, mV	mA, V	1	1		x				1,5 kVac	0,1%
Z110D	mA	mA	2	2				x		1,5 kVac	0,1%
Z110S	mA	mA	1	1				x		1,5 kVac	0,1%
Z170REG-1	mA, mV, V, Ohm, TC (J,K,R,S,T,B,E,N), Pt100, Ni100, Pt500, Pt1000, (Strobe)	mA, V, (Relay SPST)	1	2		x				1,5 kVac	0,1%
Z190	mA, V	mA, V	2	1	x				20 Vdc	1,5 kVac	0,2%
Z-SG	mV, Load cell	mA, V, RS485 ModBUS	1	1		x				1,5 kVac	0,01%
A/D CONVERTERS											
Z-4AI-D	mA, V	Serial / Signals 24V PNP (Clock, Data, Strobe)	4	3	x					1,5 kVac	0,1%
Z-4TC-D	TC, mV	Serial / Signals 24V PNP (Clock, Data, Strobe)	4	3	x					1,5 kVac	0,1%
ELECTRIC METER CONVERTERS											
Z201	Aac	mA, V	1	1	x					1,5 k Vac	0,3%
Z201-H	Aac	mA, V	1	1			x			4 kVac	0,3%
Z202	Vac	mA, V	1	1		x				3,75 k Vac	0,25%
Z202-H	Vac	mA, V	1	1			x			4 kVac	0,25%
Z202LP	Vac/dc	mA, V	1	1				x		4 kVac	0,25%
Z203-1	A, V	mA, V, RS485 ModBUS	1	1		x				3,75 kVac	0,5%
Z204-1	Vac/dc	mA, V, RS485 ModBUS	1	1		x				4 kVac	0,5%
RELAYS CONDITIONERS											
Z112A	Free contact, Reed, NPN, PNP, Namur, Photoelectric, Hall, Variable reluctance, 24V pulse, TTL, Volumetric meter	Relay SPDT	1	1	x				20 Vdc	1,5 kVac	
Z112D	Free contact, Reed, NPN, PNP, Namur, Photoelectric, Hall, Variable reluctance, 24V pulse, TTL, Volumetric meter	Relay SPST	2	2	x				20 Vdc	1,5 kVac	
Z113D	mA, V	Relay SPST	1	2	x				20 Vdc	1,5 kVac	
Z113S	mA, V	Relay SPDT	1	1	x				20 Vdc	1,5 kVac	
Z113T	mA, V	Relay SPST	1	3	x				20 Vdc	1,5 kVac	
Z113-1	mA, V, Ohm, RTD, TC	Relay SPST	1	2		x				1,5 kVac	
TEMPERATURE CONVERTERS											
Z109PT2-1	Pt100, Ni100, Pt500, Pt1000	mA, V	1	1		x				1,5 kVac	0,1%
Z109TC2-1	TC (J,K,R,S,T,B,E,N)	mA, V	1	1		x				1,5 kVac	0,2%
PULSE CONVERTERS											
Z104	mA, V	NPN Open Collector, Reed Relay	1	1	x				20 Vdc	1,5 kVac	0,2%
Z111	Free contact, Reed, NPN, Namur, Photoelectric, Hall, Variable reluctance, 24V pulse, TTL, Volumetric meter	mA, V	1	1	x				20 Vdc	1,5 kVac	0,2%

INSTANT SETTING THROUGH MOBILE APP FOR ANDROID



EASY Setup APP provides the same functionality of EASY Setup available for Windows PC with an intuitive and user friendly interface for: operating parameters and communication setting and changing, individual modules automatic configuration, real-time test configuration and fast replication of the settings for multiple installations.



Easy to download and provided with simple and intuitive interface, EASY Setup app allows direct connection to SENECA programmable device for immediate monitoring, programming and testing operations of single devices.

Supported modules: Z109REG2-1, Z109UI2-1, Z109REG-BP, Z170REG-1, Z109PT2-1, Z109TC2-1

Language: Italian, English

Android versions: 4.0 and later

Mobile terminals: Android Smartphone/Tablet with OTG function

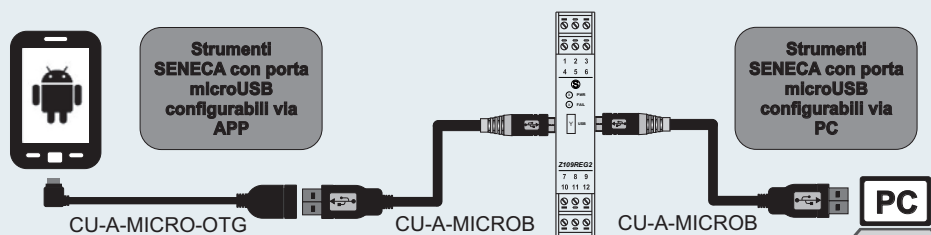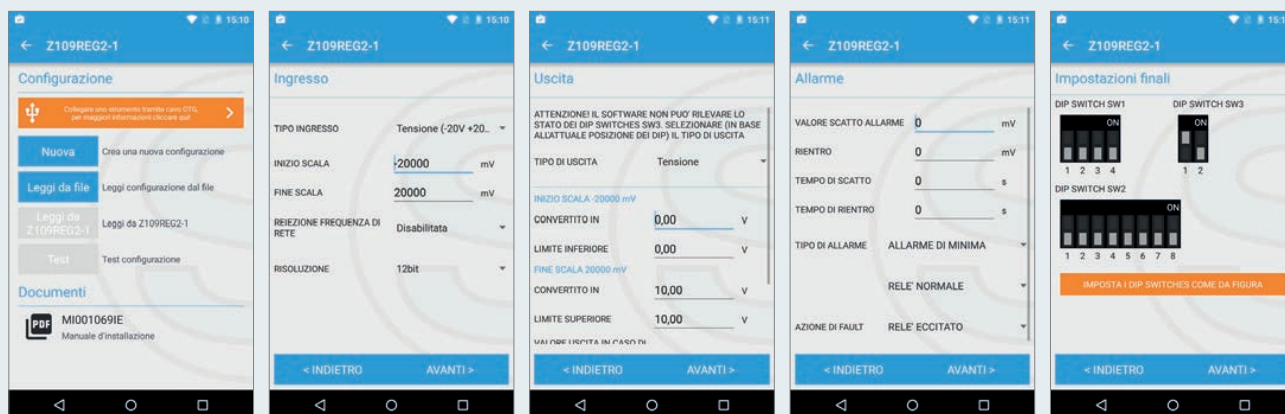



No liability for the contents of this documents can be accepted. Use the concepts, examples and other content at your own risk. There may be errors and inaccuracies in this document, that may of course be damaging to your system. Proceed with caution, and although this is highly unlikely, the author(s) do not take any responsibility for that. Prices indicative only & subject to change without notice.

1800135 - Publication ZLINE_1902EN