


PCI/LPCI/LPCle-7230, PCI-7233/7234

32-CH Isolated DIO Cards

CompactPCI

PCI EXPRESS® **PCI**

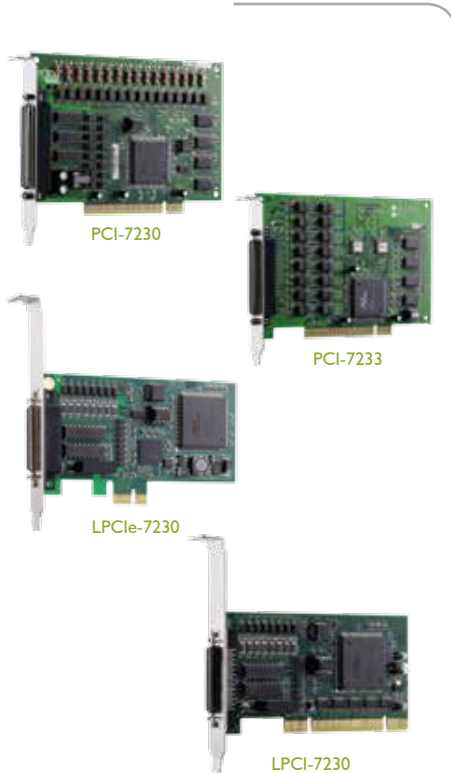

Specifications

Isolated Digital Input

- Number of channels
 - 16 (PCI-7230/LPCI-7230/LPCle-7230)
 - 32 (PCI-7233)
- Maximum input range
 - 24 V, non-polarity
 - PCI-7230/PCI-7233/LPCI-7230/LPCle-7230
- Digital logic levels
 - 0-24 V, non-polarity
 - Input high voltage: 5-24 V
 - Input low voltage: 0-1.5 V
- Input resistance: 1.2 k @ 0.5 W
- Isolation voltage
 - 2500 V_{RMS} (LPCI-7230/LPCle-7230)
 - 5000 V_{RMS} (PCI-7230/PCI-7233)
- Interrupt sources
 - Digital input channel 0 and 1 (PCI-7230/LPCI-7230/LPCle-7230)
 - Change-of-state (PCI-7233)
- Data transfers: programmed I/O

Isolated Digital Output

- Number of channels
 - 16 (PCI-7230/LPCI-7230/LPCle-7230)
 - 32 (PCI-7234)
- Output type: Darlington transistor
- Sink current
 - 500 mA for one channel @ 100% duty (PCI-7230/LPCI-7230/LPCle-7230)
 - 370 mA for all channels @ 10% duty (PCI-7230/LPCI-7230/LPCle-7230)
 - 130 mA for all channels @ 50% duty (PCI-7230/LPCI-7230/LPCle-7230)
 - 500 mA for single channel @ 100% duty (PCI-7234)
 - 500 mA for all channels @ 20% duty (PCI-7234)
- Source current
 - 500 mA for one channel @ 100% duty cycle (PCI-7234P)
 - 260 mA for all channels @ 10% duty cycle (PCI-7234P)
- Power dissipation
 - Max. 1.47 W per chip (8 DO channels) (PCI-7230/PCI-7234P/LPCI-7230/LPCle-7230)
 - Max. 2.25 W per chip (8 DO channels) (PCI-7234)
- Supply voltage: 5-35 V_{DC}
- Isolation voltage: 2500 V_{RMS}
- Data transfers: programmed I/O

General Specifications

- I/O connector
 - PCI-7230/7233/7234/7234P
 - 37-pin D-sub female
 - PCI-7230/LPCI-7230
 - One 50-pin SCSI-II female
- Operating temperature: 0°C to 60°C (32°F to 140°F)
- Storage temperature: -20°C to 80°C (-4°F to 176°F)
- Relative humidity: 5% to 95%, non-condensing

Power requirements

Device	Power Consumption
PCI-7230	+5 V @ 150 mA typical (needs external DC power)
PCI-7233	+5 V @ 300 mA typical
PCI-7234	+5 V @ 180 mA typical (with internal DC-DC power)
PCI-7234P	+5 V @ 150 mA typical
LPCI-7230	+3.3 V @ 279 mA
LPCle-7230	+12 V @ 133 mA

Dimensions (not including connectors)

- 153 mm X 107 mm (5.96" x 4.17") (PCI-7230)
- 158 mm X 107 mm (6.16" x 4.17") (PCI-7233)
- 175 mm x 107 mm (6.82" x 4.17") (PCI-7234 & PCI-7234P)
- 120 mm X 65 mm (4.68" x 2.53") (LPCI-7230)
- 119.9 mm x 68.9 mm (4.67" x 2.68") (LPCle-7230)

Terminal Boards & Cables

PCI-7230/7233/7234/7234P:

■ DIN-37D-01

Terminal Board with One 37-pin D-sub Connector and DIN-Rail Mounting (Cables are not included.)

■ ACLD-9137-01

General-Purpose Terminal Board with One 37-pin D-sub Male Connector

■ ACL-10137-1MM

37-pin D-sub male/male cable, 1 M

LPCI-7230/LPCle-7230:

■ DIN-50S-01

Terminal Board with One 50-pin SCSI-II Connector and DIN-Rail Mounting (Cables are not included.)

■ ACL-10250-1

50-pin SCSI-II cable (mating with AMP-787082-5), 1 M

Ordering Information

■ PCI-7230

16-CH Isolated DI & 16-CH Isolated DO Card

■ PCI-7233

32-CH Isolated DI Card with inversed input logic

■ PCI-7234

32-CH Isolated DO Card

■ PCI-7234P

32-CH Isolated DO Card with Source Current Transistor

■ LPCle-7230

16-CH Isolated DI & 16-CH Isolated DO Low-Profile PCI Card

■ LPCle-7230

16-CH Isolated DI & 16-CH Isolated DO Low-Profile PCI Express® Card

Features

- Supports a 32-Bit 5 V PCI bus (PCI-7230/7233/7234/7234P)
- Supports a 32-Bit 3.3 V or 5 V PCI bus (LPCI-7230)
- x1 lane PCI Express Interface (LPCle-7230)
- 16-CH isolated digital inputs & 16-CH isolated digital outputs (PCI-7230/LPCI-7230/LPCle-7230)
- 32-CH isolated digital inputs (PCI-7233)
- 32-CH isolated digital outputs (PCI-7234/7234P)
- 5000 V_{RMS} optical isolation (PCI-7230 & PCI-7233)
- 2500 V_{RMS} optical isolation (PCI-7234/7234P/LPCI-7230/LPCle-7230)
- Sink current up to 500 mA on single isolated output
- Two external interrupt sources (PCI-7230/LPCI-7230/LPCle-7230)
- Change-of-state interrupt sources (PCI-7233)
- Compact, low-profile PCI/PCI Express® size PCB (LPCI-7230/LPCle-7230)
- Supported Operating System
 - Windows 7/8 x64/x86, Linux
- Driver and SDK
 - LabVIEW, MATLAB, C/C++, Visual Basic, Visual Studio.NET
- Software Utility
 - AD-Logger