

# PICE2310/2310E

Intel® Atom™ Dual Core D2550 1.86GHz Fanless System  
w/ 4 x LAN Ports, 4 x COM Ports and One PCI/PCIe Expansion



## Main Features

- OnBoard Intel® Atom™ Dual Core D2550 processor 1.86GHz
- Intel® 82801JIR ICH10 RAID
- 1 x DVI-I & 1 x DVI-D display output
- 4 x Intel® 82574IT GbE LAN ports; Support WoL, teaming and PXE
- 4 x RS232/422/485
- 4 x GPI & 4 x GPO
- 6 x USB 2.0; 1 x external CFast socket; 1 x SIM card socket
- 1 x internal Mini-PCIe with two antenna holes
- Support +9V to 36VDC input; Support ATX power mode
- 1 x PCI or PCIe expansion

## Product Overview

Powered by Intel® Atom™ Dual Core D2550 Processor, PICE2310/2310E is another utilized within industrial automation. It is designed with wide operating temperature and can be operated in rough environment. PICE2310/2310E follows PICE guideline with fanless and cables-less concept. PICE2310/2310E designed with 4 x LAN ports; Support WoL and LAN teaming and PXE functions. Other than above, PICE2310/2310E also provide 6 x USB 2.0, dual independent display and super graphic performance for variety needs and one PCI or PCIe1 expansion is available. PICE2310/2310E series support a wide range DC input from +9V to 36V enhances its reliability in different power condition in any demand.

## Specifications

### CPU Support

- OnBoard Intel® Atom™ Dual Core D2550 processor, 1.86GHz, 1M L2 cache
- Intel® 82801JIR ICH10 RAID

### Main Memory

- 2 x DDR3 so-dimm socket, support up to 4G DDR3/DDR3L 1066/1333/1600 SDRAM, with un-buffered and non-ECC
- Pre-install 4G industrial-grade memory as the manufacture configuration for shipment

### Dual Independent Display Option

- DVI-D + VGA  
(P/N: 60233VGA50X00, 1.8M cable, from DVI-I to VGA male type)
- DVI-D + DVI-D

### I/O Interface-Front

- ATX Power on/off switch
- HDD access/power status LEDs
- 2 x DB9, RS232/422/485 w/ 2.5KV isolation protection
- 2 x USB 2.0
- 4 x GPO & 4 x GPI
- 1 x Mic-in and 1 x Line-out
- SIM card socket
- CFast socket
- 2 x antenna holes

### I/O Interface-Rear

- 1 x 2-pin DC input, Support +9 to 36VDC input
- 1 x DVI-I
- 1 x DVI-D
- 4 x Intel® 82574IT GbE LAN ports; Support WoL, teaming and PXE
- 4 x USB 2.0
- 2 x DB9, RS232/422/485

### Device

- 1 x 2.5" SATA HDD driver bay
- 1 x External CFast socket
- 1 x External SIM card socket
- 1 x internal Mini-PCIe socket (Support optional Wi-Fi or 3.5G wireless module, jumper free)


### Expansion

- PICE 2310: One PCI Expansion  
Add-on card length: 176mm max.  
Power consumption: 10W/ slot max.
- PICE2310E: One PCIe1 Expansion  
Add-on card length: 176mm max.  
Power consumption: 10W/ slot max.

### Power Requirements

- Support +9V to 36VDC input; Support ATX power mode

## Dimension Drawing

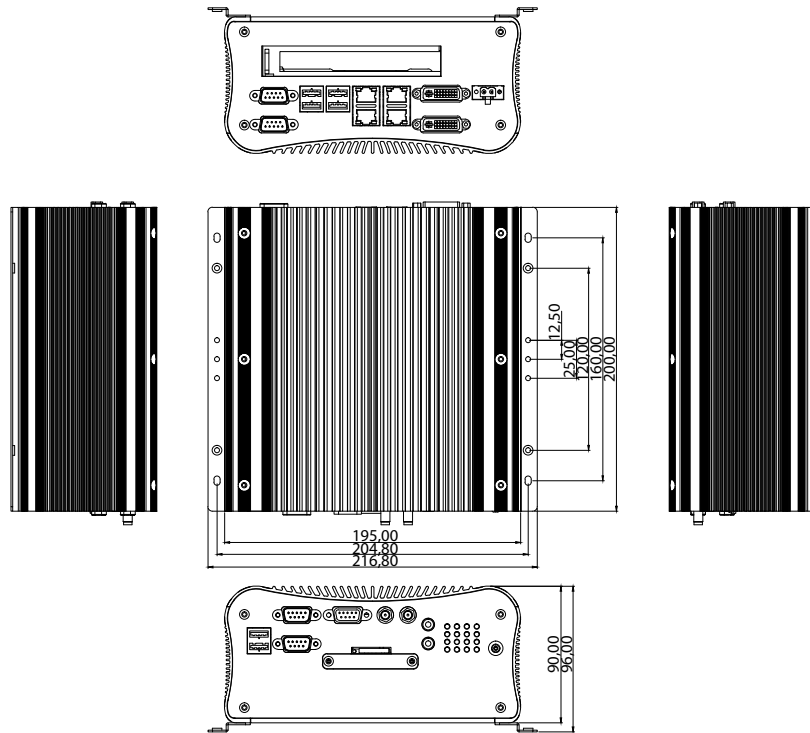

### Dimensions

- 195mm (W) x 200mm (D) x 90mm (H) (7.7" x 7.9" x 3.6")

### Construction

- Aluminum Chassis with fanless design

### Environment

- Operating temperature:
  - Ambient with air flow: -20°C to 65°C with industrial grade device
- Storage temperature: -30°C to 85°C
- Relative humidity: 10% to 93% (Non-condensing)
- Shock protection:
  - HDD: 20G, half sine, 11ms, IEC60068-2-27
  - CFast: 40G, half sine, 11ms, IEC60068-2-27
- Vibration protection w/ HDD
  - Random: 0.5Grms @ 5 ~ 500Hz according to IEC60068-2-64
  - Sinusoidal: 0.5Grms @ 5 ~ 500Hz according to IEC60068-2-6

### Certifications

- CE approval
- FCC Class A

### OS Support List

- Windows XP 32bits
- Windows 7 32bits
- WinCE 7.0

## Ordering Information

### Barebone

- **PICE2310 (P/N: 10J00231000X0)**  
Intel® Atom™ Dual Core D2550 fanless system with DDR3 4G memory and One PCI expansion
- **PICE2310E (P/N: 10J00231001X0)**  
Intel® Atom™ Dual Core D2550 fanless system with DDR3 4G memory and One PCIe1 expansion
- **19V 65W AC/DC power adapter w/ o power cord (P/N: 7400065009X00)**