

## SCM5B49

## Voltage Output Modules



## Description

Each SCM5B49 voltage output module provides a single channel of analog output. The track-and-hold circuit in the input stage can be operated in a hold mode where one DAC can supply many output modules, or a track mode where one DAC is dedicated to each module. In addition to the track-and-hold circuit, each module provides signal buffering, isolation, filtering, and conversion to a high-level voltage output (Figure 1).

Setting of the track or hold mode is controlled by the logic state of WR EN $\bar{}$ , module pin 23. When pin 23 is low, the track mode is enabled. If pin 23 is high, the hold mode is enabled. The module is designed with a completely isolated computer side circuit which can be floated to  $\pm 50V$  from Power Common, pin 16. This complete isolation means that no connection is required between I/O Common and Power Common for proper operation of the track and hold circuit. For a low state, simply connect pin 23, the Write-Enable pin, to I/O Common, pin 19.

The SCMPB02 and SCMPB06 backpanels allow host computer control of the WR EN $\bar{}$  control line, which allows multiplexing of one host DAC to up to 64 SCM5B49 output modules.

## Features

- Accepts High-Level Voltage Inputs to  $\pm 10V$
- Provides High-Level Voltage Outputs to  $\pm 10V$
- 1500 Vrms Transformer Isolation
- ANSI/IEEE C37.90.1 Transient Protection
- 5 Poles of Filtering
- 110dB CMR
- 400Hz Signal Bandwidth
- $\pm 0.03\%$  Accuracy
- $\pm 0.015\%$  Linearity
- CSA C/US Certified
- CE and ATEX Compliant
- Mix and Match SCM5B Types on Backpanel

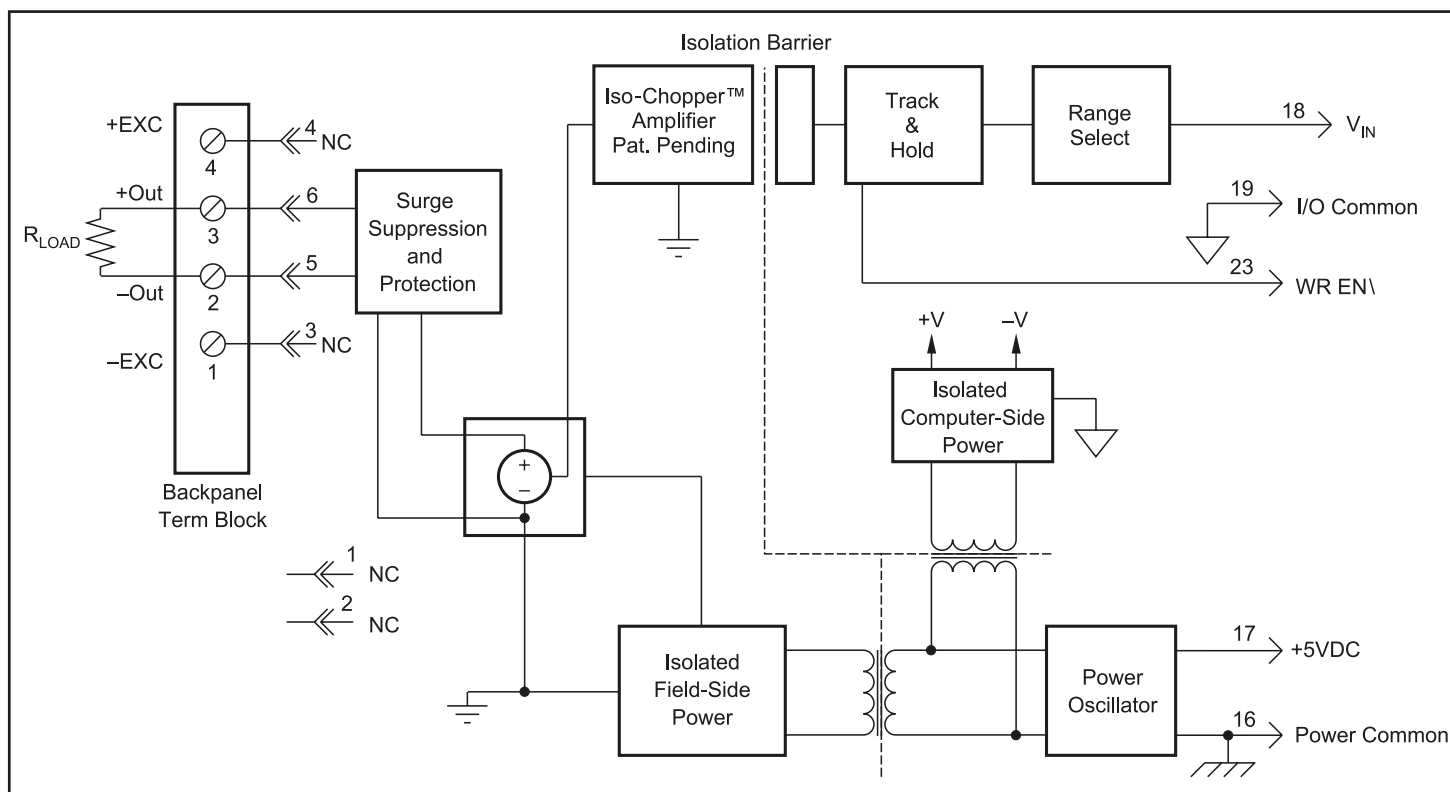


Figure 1: SCM5B49 Block Diagram

## Specifications

Typical\* at T<sub>A</sub> = +25°C and +5VDC power

Module	SCM5B49
Input Voltage Range	±5V, 0 to +5V, ±10V, 0 to +10V
Input Voltage Maximum	±36V (no damage)
Input Resistance	50MΩ
Output Voltage Range	±5V, 0 to +5V, ±10V, 0 to +10V
Over Range Capability	5% at 10V output
Output Drive	50mA max
Output Resistance	0.5Ω
Output I Under Fault, Max	75mA
Output Protection	
Continuous	240Vrms max
Transient	ANSI/IEEE C37.90.1
CMV, Output to Input	
Continuous	1500Vrms max
Transient	ANSI/IEEE C37.90.1
CMR (50 or 60Hz)	110dB
NMR (–3dB at 400Hz)	80dB per Decade above 400Hz
Accuracy <sup>(1)</sup>	±0.03% Span (0-5mA Load)
Linearity	±0.015% Span
Stability	
Zero	±25ppm/°C
Span	±20ppm/°C
Noise	
Output Ripple, 100kHz bandwidth	2mVp-p
Bandwidth, –3dB	400Hz
Response Time, 90% Span	1.25ms
Sample and Hold	
Output Droop Rate	0.2% Span/s
Acquisition Time	50μs
Track-and-Hold Enable Control	
Max Logic “0”	+0.8V
Min Logic “1”	+2.4V
Max Logic “1”	+36V
Input Current “0”	0.5μA
Power Supply Voltage	+5VDC ±5%
Power Supply Current	350mA Full Load, 135mA no load
Power Supply Sensitivity	±12.5ppm/%
Mechanical Dimensions (h)(w)(d)	2.28" x 2.26" x 0.60" (58mm x 57mm x 15mm)
Environmental	
Operating Temperature Range	–40°C to +85°C
Storage Temperature Range	–40°C to +85°C
Relative Humidity	0 to 95% Noncondensing
Emissions EN61000-6-4	ISM, Group 1
Radiated, Conducted	Class A
Immunity EN61000-6-2	ISM, Group 1
RF	Performance A ±0.5% Span Error
ESD, EFT	Performance B

### NOTES:

\*Contact factory or your local Dataforth sales office for maximum values.

(1) Includes linearity, hysteresis and repeatability.

## Ordering Information

Model	Input Range	Output Range
SCM5B49-01	0V to +5V	–5V to +5V
SCM5B49-02	–5V to +5V	–5V to +5V
SCM5B49-03	–5V to +5V	0V to +5V
SCM5B49-04	0V to +10V	–10V to +10V
SCM5B49-05	–10V to +10V	–10V to +10V
SCM5B49-06	–10V to +10V	0V to +10V
SCM5B49-07	–5V to +5V	–10V to +10V