


PCIe-8332/PCIe-8334/PCIe-8338

16/32/64-axis PCIe EtherCAT Master Motion Controller

Features

- PCI Express® x 1 compliant
- Up to 64-axis motion control & 10,000 I/O point control via EtherCAT
- EtherCAT cycle times up to 250µs
- Broad range of compatible EtherCAT slaves
- Dedicated emergency stop input
- 4CH isolated digital input/4CH isolated digital output
- 1CH pulsar input
- Point-table functions for contouring application
- Support for up to 16D linear interpolation, 3D circular and 3D spiral interpolation
- 8 program tasks downloadable for standalone application
- Card ID selection

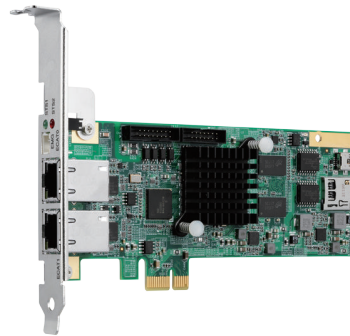

Introduction

ADLINK PCIe-8332/PCIe-8334/PCIe-8338 is a hardware-based EtherCAT motion controller able to support up to 64 synchronized axes and over 10,000 points simultaneously. The PCIe-8332/PCIe-8334/PCIe-8338 features dedicated isolated emergency stop input (EMG), and configurable isolated high-speed digital input as not only generic sensor input but also pulsar input, with up to 1MHz input frequency.

Optimum jitter control is provided in minimal cycles of 250µs to optimize synchronous I/O performance for vertical automation applications in semiconductor, electronic manufacturing, and others.

The PCIe-8332/PCIe-8334/PCIe-8338 provides an out-of-shell application-ready (APS) function library to generate multi-dimensional, highly synchronized, time-deterministic event-triggered motion & I/O control. A wide range of compatible 3rd party slaves are easily designed with ADLINK's APS function library. ADLINK's MotionCreatorPro 2™ utility is fully compliant with the Microsoft® Windows™ environment, that allows complete EtherCAT motion and I/O configuration and function evaluation as well as compiling program download functions.

Software Support

- **OS Information**
Windows 7/10 32/64-bit
- **Library**
 - APS function library for Motion & I/O Control
 - VS C#, VS VB.NET, and VS C++ compatible
- **Utility**
MotionCreatorPro 2™

Ordering Information

- **PCIe-8332**
16-axis PCIe EtherCAT Master Motion Controller
- **PCIe-8334**
32-axis PCIe EtherCAT Master Motion Controller
- **PCIe-8338**
64-axis PCIe EtherCAT Master Motion Controller

Specifications

	PCIe-8332		PCIe-8334	PCIe-8338
EtherCAT Communication				
EtherCAT Cycle Time	1CH @ 250μs / 500μs / 1000μs / 2000μs			
Max. Number of Axes	16	32	64	
Motion I/O Interface Signals				
Emergency Stop In	1CH			
Isolated I/O Signals				
Digital Input	4CH (2CH configured as Pulsar Input)			
Pulsar Input Mode	CW/CCW; 1x/2x/4x AB Phases			
Pulsar Input Frequency	Up to 1MHz			
Digital Input Voltage	24Vdc (typ.) / 5Vdc for pulsar connection			
Digital Input Type	Sourcing type			
Digital Output	4CH, Isolated			
Digital Output Voltage	24V (typ.)			
Digital Output Type	90mA, NPN sinking type			
General Specification				
Operating Temp	0°C to +60°C (32°F to 140°F)			
Humidity	5% to 95%, non-condensing			
Environmental Specification				
Safety compliance	CE/FCC, RoHS			