

GPD-1505

15 -inch

Ultra-slim

IP65

Win7
Supported



Waterproof gasket design (optional)



Feature

15 " LCD panel support up to 1024 x 768 resolution

High quality silver anodic aluminum front bezel

Combo touch interface: RS-232 or USB alternative

Panel mount and rear VESA mount support

Windows 2000/XP/XPE/CE/7/8 and Linux driver supported

5-Wire resistive touch solution

Applications

Medical cosmetics

Human Machine Interface (HMI)

Kiosk applications

Factory automation / Manufactory automation

Ordering Information


GPD-1505
15" inch LCD touch panel

Optional Items

ADP-60W
Adaptor AC-to-DC 12V@5A, 60W, phoenix power connector

All specifications are subject to change without notice

Physical dimension

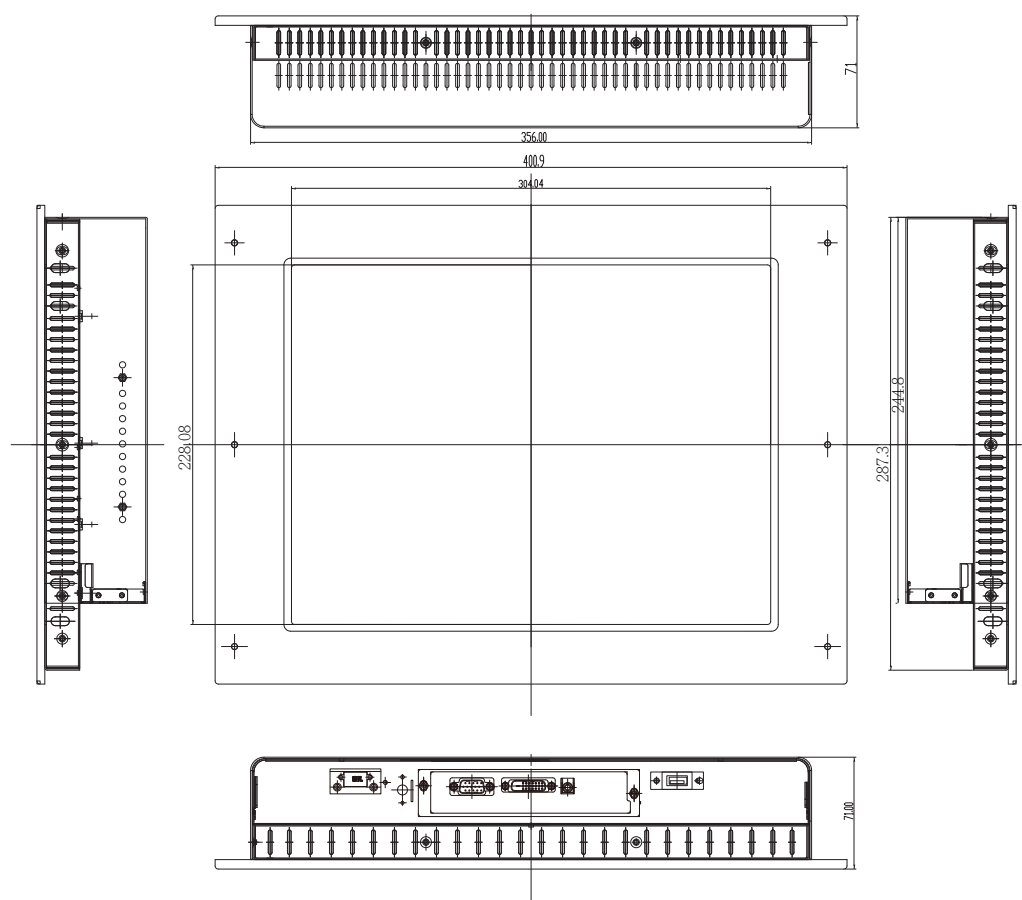

Unit: mm

Specification

		GPD-1505
Display	Panel size	15" TFT LCD panel
	Resolution	1024 x 768
	Viewing angle	140(H) x 125 (V)
	Brightness	350 (cd/m2)
	Color support	16.2M
	Contrast ratio	700:1
Touch	Touch screen type	5-Wire resistive touch screen
	Surface hardness	3H
	Durability	10 million touches
	Transparency	90%+ /-3%
Power	Input voltage range	Supports single 12V input with 12VDC jack
	Power adaptor	AC to DC power adaptor 12V/5A ,60W (Optional)
System	I/O	1 x VGA, 1 x DVI, 1 x USB or RS-232 for resistive touch screen
	OSD	Keys: Menu, Up, Down, Auto adjust, Monitor Power on/off Menu Functions: Brightness, Contrast, Color adjust, Color temp, Auto color, and Language
	Installation	Panel mount & VESA mount 100 x 100 mm
Environment	Operating temperature	0 ~ 45° C
	Storage temperature	-10 ~ 70° C
	Humidity	5 ~ 95%RH 45° C (Non-condensation)
	Vibration	5-500 Hz, 0.026G ² /Hz, 2.16Grms, X, Y, Z, 1 hour per axis
	Certification EMC safety	CE, FCC
Mechanical	Dimension (W x H xD)	400.9x303.7x71 mm
	Weight	6.5kg

All specifications are subject to change without notice