

innodisk **EMPS-3401** mPCIe to four SATA III Module

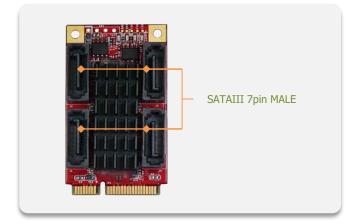

Mechanical Drawing

Features

- -mPCIe to four SATA III ports.
- -Supports AHCI, Port-Multiplier.
- -Supports Native Command Queuing
- -Supports error reporting, recovery and correction.
- -Optional Industrial Temperature (-40°C to +85°C) support
- -30μ golden finger, 3 years warranty.
- -Industrial design, manufactured in innodisk Taiwan

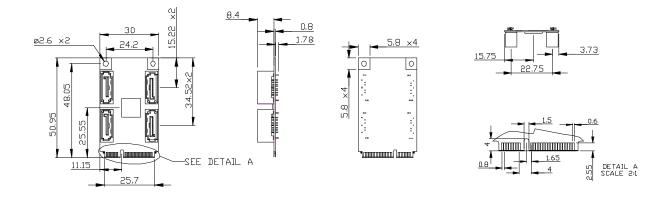

Specifications

Form-Factor	mPCIe
Input I/F	PCI Express 2.0
Output I/F	SATA III
Output Connector	SATA 7pin x 4
Bridge	Marvell 88SE9215
TDP	2.74W (3.3V x 830mA)
Dimension (WxLxH)	30 x 50.9 x 10.9 mm, Weight: 8.5g
Temperature	Operation: -40°~85°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	

© 2020 Innodisk Corporation. All right reserved. Specifications are subject to change without prior notice.

May 29, 2020



Order information EMPS-3401-W1(Wide Temp.) mPCIe to four SATA III Module, WT.