

Datasheet

2.5" SATA SSD 3TG6-P_AES series

- 2.5" SATA III solution for industrial field
- High IOPS
- iSMART disk health monitoring
- AES-256 encryption
- End to end data path protection
- iData Guard for abnormal power failure
- iCell technology for data protection (optional)
- iPower Guard for protecting unstable start up and shut down



Introduction

Innodisk 2.5" SATA SSD 3TG6-P is SATA III 6Gb/s solid state disk, which delivers excellent performance, especially in random data transfer rate, and which offers reliability making it the ideal solution for a variety of applications, including embedded system, industrial computing, and enterprise field. 3TG6-P 2.5" SSD not only performs unmatched performance, but also designed with Innodisk owned technical knowhow to ensure the data integrity and highest levels of reliability.

2.5" SATA SSD


3TG6-P_AES series

Drawing

Contact us for more information
about the 2.5" SATA SSD 3TG6-P

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

* DGS25-XXXM72EXXQF (128GB-4TB)

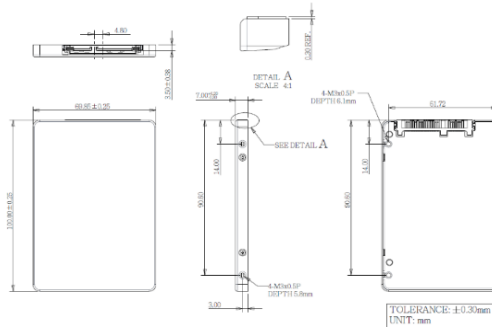

Specifications

Interface	SATA III
Flash Type	3D TLC
Capacity	128GB~4TB
Max. Channels	4
Sequential R/W (MB/sec, max.)*	560 / 510 MB/s
4KB Random (QD32) R/W (IOPS)*	82000 / 68000
Max. Power Consumption	5.7W
Thermal Sensor	✓
External DRAM Buffer	✓
AES encryption	✓
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	69.8 X 100.0 X 6.8 mm ³ (128GB ~ 4TB)
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours
* Performance based on CrystalDiskMark 5.1.2 with file size 1000MB of Queue Depth 32	
* Performance may vary based on various firmware version or test platform	

© 2017 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

Ordering Information (Please refer to TPS for detail)

20180703

Operation Temp.	128GB	256GB	512GB	1TB	2TB	4TB
Standard Grade (0°C ~ +70°C)	DGS25-A28M72EC3QF	DGS25-B56M72EC3QF	DGS25-C12M72EC3QF	DGS25-01TM72EC1QF	DGS25-02TM72ECAQF	DGS25-04TM72ECBQF
Industrial Grade (-40°C ~ +85°C)	DGS25-A28M72EW3QF	DGS25-B56M72EW3QF	DGS25-C12M72EW3QF	DGS25-01TM72EW1QF	DGS25-02TM72EWAQF	DGS25-04TM72EWBQF

innodisk