

PImC-2940



- *Aluminium case Fanless design*
- *Stable performance, running 7/24*
- *Working temperature range -10~60*
- *Dual LAN Port*
- *Dual HDMI Display*
- *256 GB SSD Storage*

349,-€

zzgl. MwSt.

Specification



ISO9001

ISO14001

Parameter list

CPU	Intel Celeron N2940
CPU Frequency	1.83-2.2GHz
Cores	4
Cache	2
TDP	7.5W
Chipset	Products formerly Bay Trail
RAM	included 8 GB RAM
Storage	included 250 GB SSD
Audio	Realtek ALC662
Graphics	Intel HD Graphics
Network	10/100/1000M Adaptive
Extendable	WIFI&BT included
OS Supporte	Windows (Not include XP) & Linux, included Windows licence

BIOS	Boot Mode	Power On / PXE / Wake-on-LAN
	Virtualization	VT-D / VT-X
	Hyper-Threading	Intel Hyper-Threading

Environmen	Working Temperature	-10 - 60°C
	Environment Temperature	-20 - 70°C
	Operating Humidity	5% - 85% (non-condensing)
	Static	Direct Contact: 2K,Air Discharge:6K
	Operating Voltage	12V - 5A
	Optional Bracket	Vesa Mount
	Radiation Method	Cooling sink

Dimension & I/O




Dimension	A	134 mm
	B	36.5 mm
	C	126 mm

I/O	①	HDD slot
	②	1/8"(3.5mm)MIC
	③	1/8"(3.5mm)SPK
	④	USB2.0*2

I/O

⑤	USB3.0*2
⑥	POWER
⑦	USB2.0*2
⑧	Giga RJ45 LAN
⑨	Giga RJ45 LAN
⑩	HDMI output
⑪	HDMI output
⑩	DC12V input

Accessories

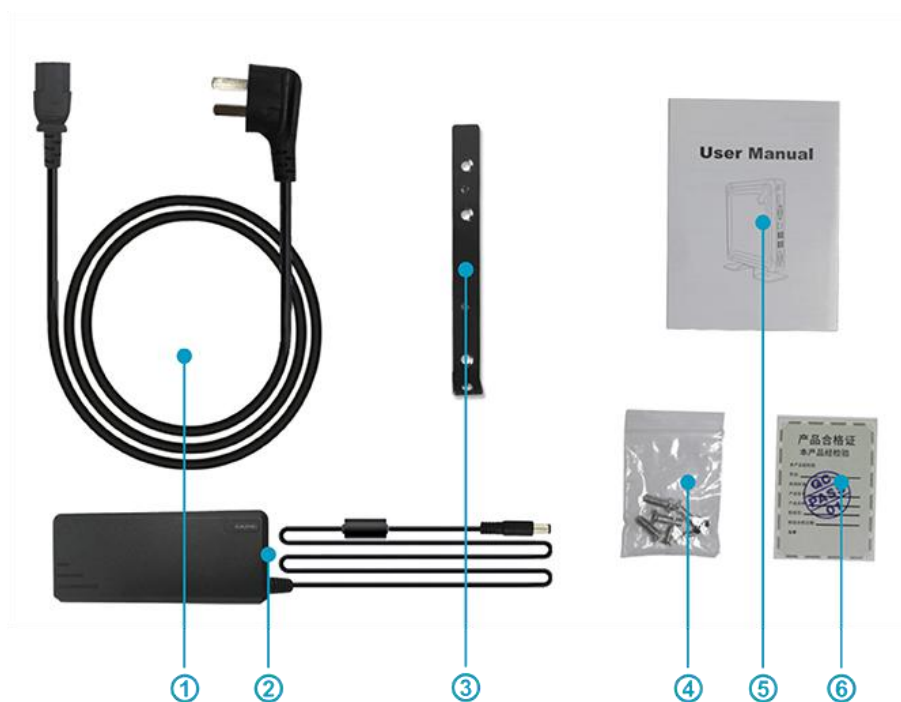

Accessories

①	Power Line
②	Power Adapter
③	Bracket
④	Screws
⑤	Manual
⑥	Certification of Approval

About Packing

Packing Box	a	157 mm
	b	150 mm
	c	97 mm
Packing Carton	A	486 mm
	B	480 mm
	C	350 mm
Weight	Product Weight	0.65 kg
	Gross Weight	1.50 kg

About Bracket



Bracket

VESA Mount