

TM-PC190

**19.0" SXGA Industrial Touch Monitor; Pcap.
Touch; Front IP65 rated; 1 VGA + 1 DVI inputs**

Version: 3.2



Features:


- Modular designed, aluminum-magnesium alloy, anodized treated;
- 19.0" TFT LCD Display, LED Backlit, SXGA 1280*1024;
- Multi up to 10 points Pcap. touchscreen, EETI controller;
- USB touch interface, optional RS232 touch interface;
- DC 12V power input, optional wide DC 9 ~ 36v input;
- Dual signal inputs: 1 VGA, 1 DVI;
- Panel mount, VESA 75/100 mount, Front IP65 rated protection
- Optional outdoor high brightness and optical bonding features.

Specification



Basic	Front Panel	Magnesium-aluminum alloy, anodized treatment
	Rear Panel	SGCC Plate sheet, sand-blasting
	Control Button	OSD button on top of backside
	Signal Input	1 VGA, 1 DVI
	Mount Method	Panel mount, VESA 75/100
	Overall Dimension	422.3 * 353.0 * 51.0 (mm)
	Cut-out Dimension	411 * 342 (mm)
	Net Weight	5.0KG
	IP Rate	Front Surface IP65 water-proof/Dust-proof
LCD Display	Size/Type	19.0" TFT LCD Display
	Resolution	1280 * 1024 (SXGA)
	Brightness	250 nits
	Contrast Ratio	1000:1
	Backlit & Lifetime	LED Backlit & 30K hours
	Display Area	376.32 * 301.06 (mm)
	View Angle	85/85/80/80
Touchscreen	Type	Projective capacitive touchscreen
	Touch points	Multi points touch, max. up to 10 points
	Durability	>100 000 000 times
	Surface Hardness	MOHS 6H
	Touch Controller	EETI
	Touch Interface	USB touch (Optional RS232 touch interface)
	Special Treatment	Anti-Fingerprint (AF)
Power & Environmental	Operating temp.	0 ~ + 50 (°C)
	Storage temp.	-20 ~ + 60 (°C)
	Humidity	10 ~ 95% @ 10C (No condensation)
	Vibration	50 ~ 500 Hz, 1.5G, 0.15mm peak to peak
	Shock	10G/Peak (11 ms)
	Power input	DC 12V (Optional wide voltage DC 9~36V)
	Power consumption	About 20W
	Certificate	CE/FCC/ROHS

DIMENSIONAL DRAWING:TM-PC190

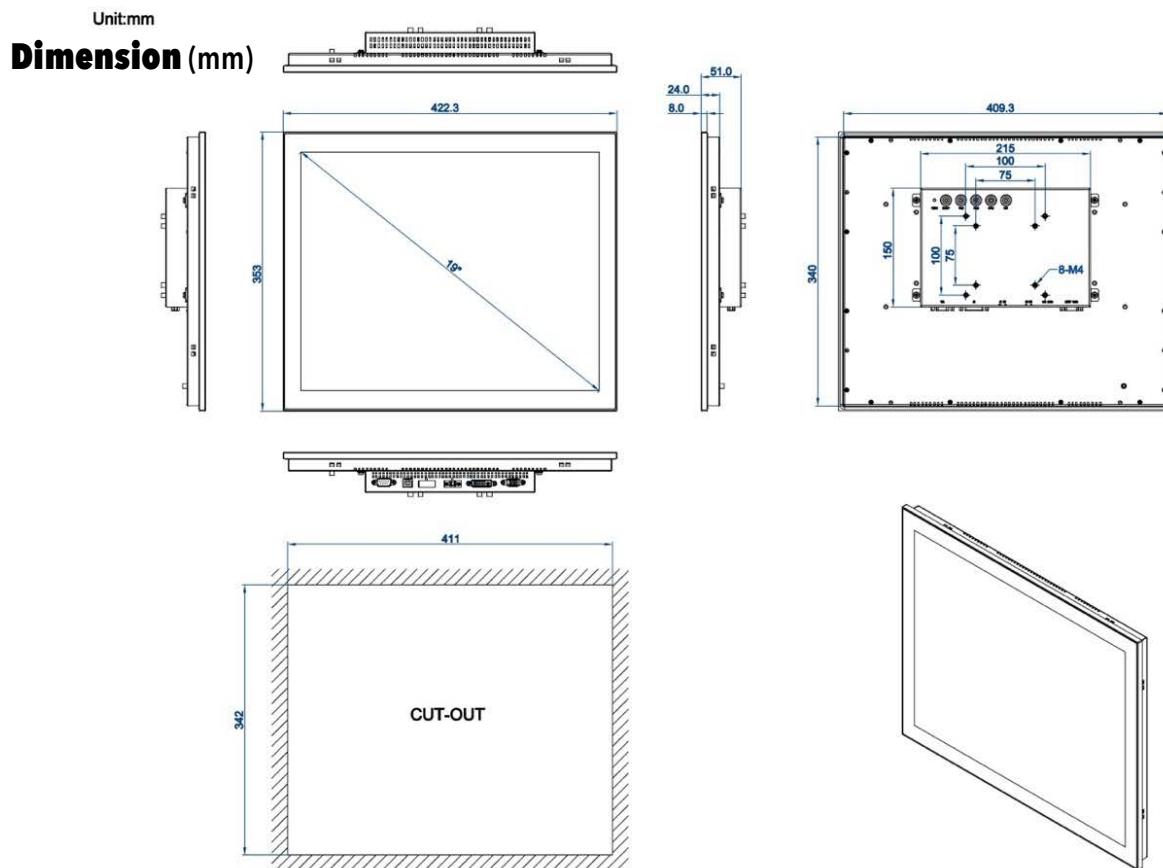

DIMENSIONS IN MILLIMETERS

TAICEM
DATE:2019.06.06
REV:A Unit:mm

Ordering information

Part no.	Description
TM-PC190	19.0" LCD, SXGA 1280 *1024, Pcap. Touch, USB Touch Interface, 1 VGA, 1 DVI, DC 12V, PSU
TM-PC190S	19.0" LCD, SXGA 1280 *1024, Pcap. Touch, RS232 Touch Interface , 1 VGA, 1 DVI, DC 12V, PSU
TM-PC190W	19.0" LCD, SXGA 1280 *1024, Pcap. Touch, USB Touch Interface, 1 VGA, 1 DVI, DC 9~36V, No PSU by default
TM-PC190L	19.0" LCD, SXGA 1280 *1024, High brightness option , Pcap. Touch, USB Touch Interface, 1 VGA, 1 DVI, DC 12V, PSU
TM-PC190L-OB	19.0" LCD, SXGA 1280 *1024, High brightness & optical bonding , Pcap. Touch, USB Touch Interface, 1 VGA, 1 DVI, DC 12V, PSU
Optional Accessories	Description
HDMI Cable	HDMI-DVI Cable, around 2.0m length
DVI Cable	DVI Cable, around 2.0m length
PSU	40W PSU (Extra for TM-PC190W model)
COM Cable	COM cable, around 1.8m length (For TM-PC190S model)

Packing List

Description	Quantity	Description	Quantity
Standard TM-PC190	1 piece	VGA Cable, around 1.8m length	1 piece
40W PSU	1 set	Power Cable & Plug	1 set
USB Touch Cable, around 1.8m length	1 piece	Panel mount metal clips	1 set (8 pieces)