

VLS-2208

Industrial 8-port Fast Ethernet Layer 2 unmanaged Ethernet Switch, 8 10/100Base T(X) Ports, IP 30, 12V to 58V DC, Rugged and Fan-less Design with Compact Size, -40°C to 75°C Extended Temperature



Features

- 8 10/100 Mb Copper Ports
- IEEE 802.3x Flow Control & Back-Pressure
- Layer 2 Line-Speed Switching Fabric, Non-Blocking
- Fan-Less Design with Wide-Temperature Range (-40°C to 75°C)
- Redundant Power Input 12V to 58V DC
- Reverse Power Protection
- Support Din-Rail or Wall Mount Installation
- IP 30 Protection
- Rugged and Compact Size Design




Specifications

Ethernet	
Operating Mode	Store and Forward, L2 wire-speed/non-blocking switching engine
MAC Addresses	1K
Packet Buffer	1Mbits
Backplane/Switching Fabric	1Gbps
RJ45 Copper Ports	
Speed	10/100 Mbps
MDI/MDIX Auto-crossover	Support straight or cross wired cables
Auto-negotiation/Duplex	10/100 Mbps speed auto-negotiation; Full & Half Duplex
Power	
Power Input	12V to 58V, DC-in
Power Interface	Redundant Power Input, DC Input, 4-pin Terminal Block
Reverse Power Protection	Yes
Power Consumption	3.5 Watt
Indicators	
Power Status Indication	Power Input Status
Ethernet Port Indication	Link & Speed
Standards	
Standards	IEEE 802.3, IEEE 802.3x, Flow Control, Back Pressure, ICMP, TCP/UDP

Mechanical	
Dimensions (H x W x L)	90mm x 40mm x 80.9mm (3.54" x 1.57" x 3.19") (without DIN rail clip)
Weight	0.265 kg (0.61lb)
Mounting	<ul style="list-style-type: none"> ▪ DIN Rail Mount ▪ Wall Mount (Optional)
Protection	IP30
Environment	
Operating Temperature	-40°C to 75°C (-40°F to 167°F) (Cold Startup at -40°C)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Humidity	5% to 95% Humidity, Non-condensing
Relative Humidity	95% @75°C
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6
Free Fall	IEC 60068-2-32
Electrical Safety	CE
EMC	<ul style="list-style-type: none"> ▪ FCC Part 15B Class A ▪ CISPR 22 (EN55032) Class B, EN55024, EN55035 ▪ IEC-61000-4-2, -3, -4, -5, -6, -8 (Level 3)
RoHS	RoHS (Pb free)
MTBF	>25 years



Dimensions

Unit : mm/ inch

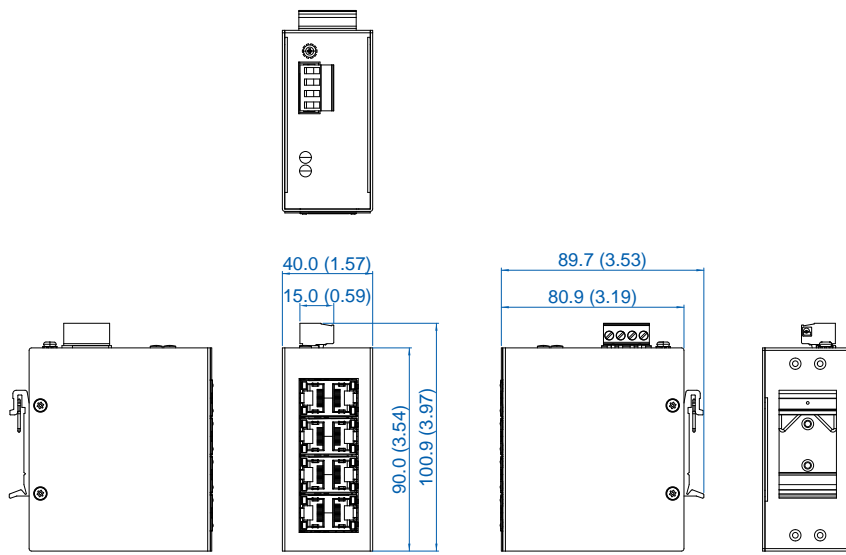

Front I/O

Top I/O

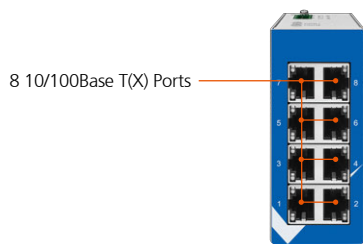

Order Information

VLS-2208	VLS-2208, Industrial 8-Port Fast Ethernet Layer 2 unmanaged Ethernet Switch, 8 10/100Base T(X) Ports, with Din Rail, -40°C to 75°C
-----------------	------------------------------------------------------------------------------------------------------------------------------------

Accessories

PWA-25W-WT	25W, 48V, 85V AC to 264V AC Power Adapter with 4-pin Terminal Block (5.08mm pitch), Wide Temperature -30°C to 70°C
Wall Mount	Wall-mounting Kit for Ethernet Switch