


EGPL-G2P1


M.2 to dual PoE Module

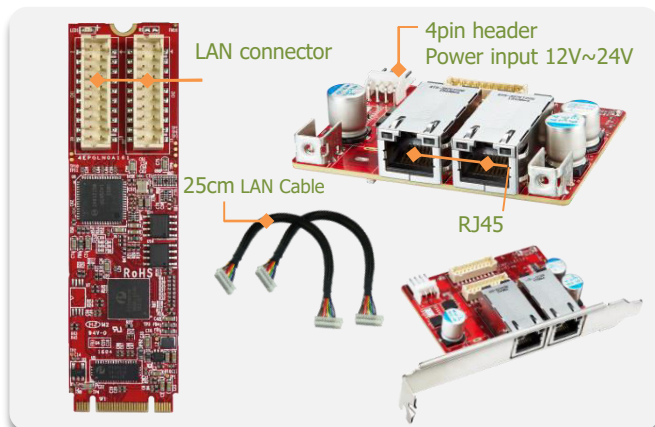

Features

- Supports dual GbE LAN ports
- Two independent PSE channels
- Supports 12V~24V power input via 4pin header
- Complies with IEEE 802.3af, up to 15.4W at 48V per PoE port.
- Complies with EN61000-4-2 (ESD) Air-15kV, Contact-8kV
- Industrial temperature -40 °C to 85 °C

Mechanical Drawing

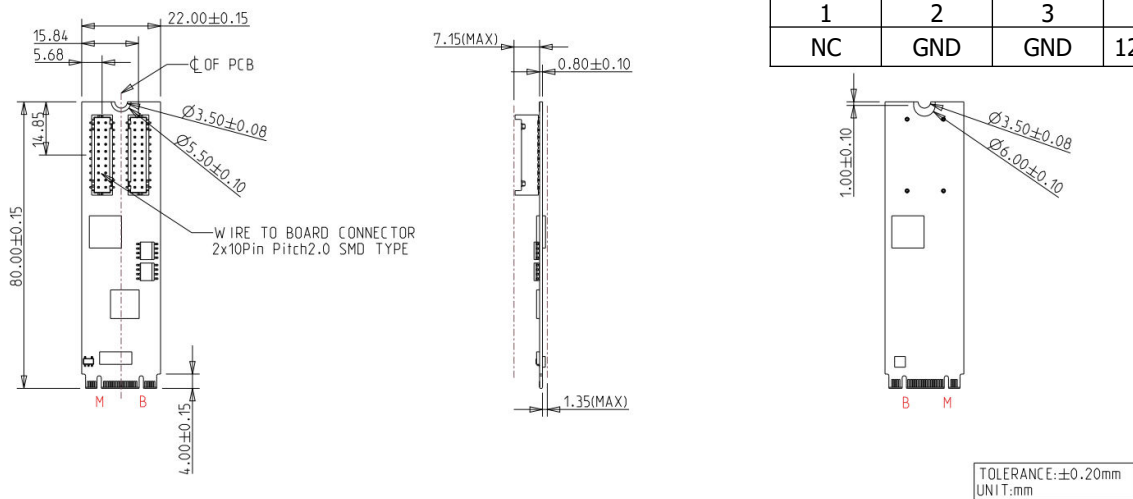

Form-Factor	M.2 2280
Input I/F	PCI Express 2.1 x 1
Output I/F	PoE x 2
Output Connector	RJ45 x 2
Power Consumption	30W
Dimension (WxLxH)	Main Board: 22 x 80 x 9.3 mm Daughter Board: 58.2 x 72.7 x 23.8 mm
Temperature	Operation: STD: 0°C ~ +70°C. W/T: -40°C ~ +85°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	Please download driver from Intel official website. Windows: XP(32bit), 7(32/64bit), 8/8.1(32/64 bit), 10(32/64bit) Linux: kernel 2.4 series, 2.6.x and 3.x version.
Limitations	EGPL-G2P1 series does not recommend used in VMware ESXi due to High Latency

© 2022 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

December 27, 2022

Order information

EGPL-G2P1-C1 (Mounting hole, 4pin header, Standard Temp.)





EGPL-G2P1-W1 (Mounting hole, 4pin header, Wide Temp.)

EGPL-G2P1-C2 (Bracket, 4pin header, Standard Temp.)




EGPL-G2P1-W2 (Bracket, 4pin header, Wide Temp.)

M.2 to dual Isolated PoE Module





EGPL-G2P1-C1/W1 Daughter Board and Mechanical Drawing

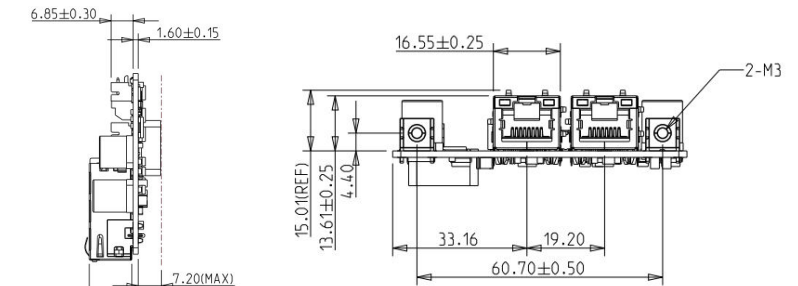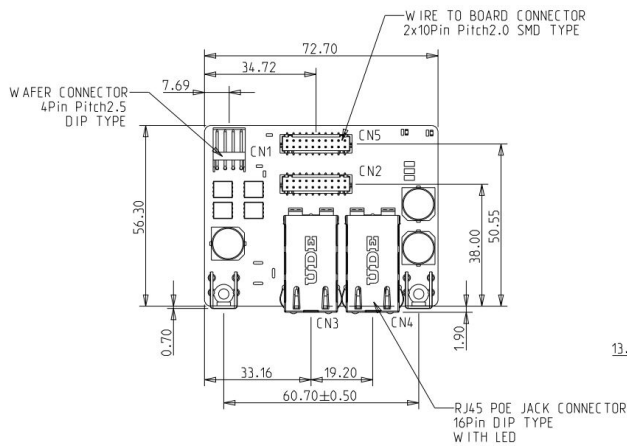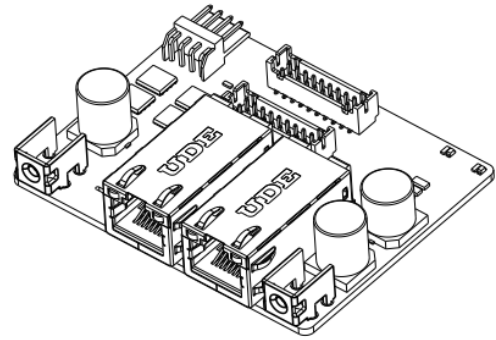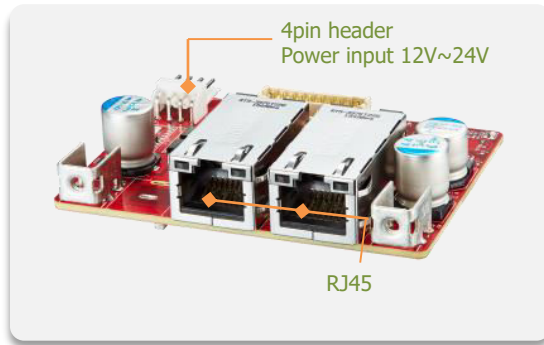

EGPL-G2P1-C2/W2 Daughter Board and Mechanical Drawing

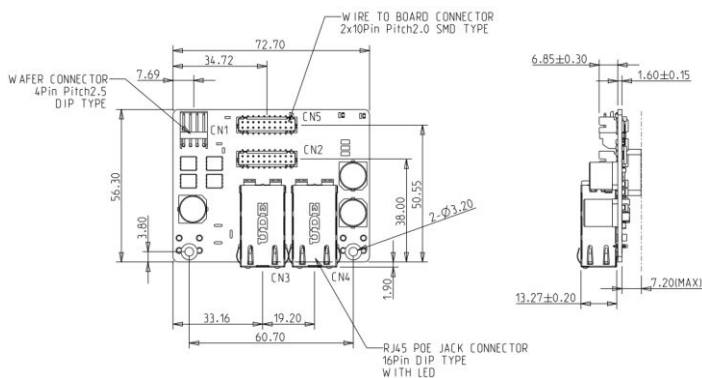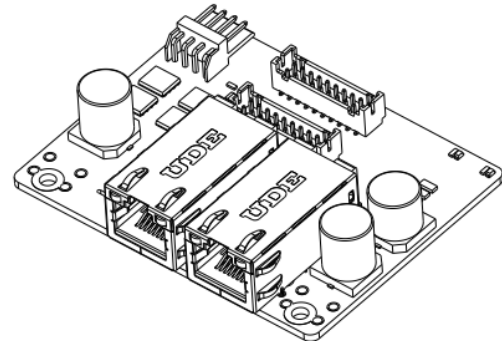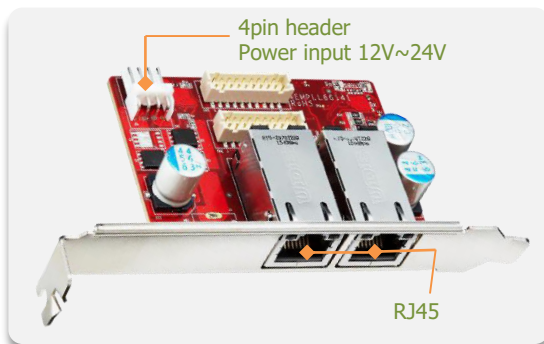

Bracket



TOLERANCE: ±0.20mm

