

**UNI-T**®



# MSO5000HD Series High-Resolution Oscilloscopes

## Data Sheet

V1.2

Dec 2025

# Product Introduction

MSO5000HD series high-resolution oscilloscope has the maximum bandwidth of 1 GHz, the maximum sampling rate of 5 GSa/s, and is equipped with 4 analog channels and 16 digital channels, with the memory depth of up to 500 Mpts. MSO5000HD series adopts exclusive Ultra Phosphor 3.0 technology, achieving the waveform capture rate of up to 1,500,000 wfms/s, with 256 levels of gray temperature colors, and features an innovative digital trigger system with high trigger sensitivity and low jitter.


This oscilloscope supports multiple advanced triggers, serial bus triggering and decoding, and offers advanced sampling and analysis modes such as spectrum analysis, power analysis, histogram, waveform recording, enhanced resolution (ERES), hardware-accelerated template testing, and search and navigation. Additionally, this oscilloscope provides multiple measurement and mathematical operations.

MSO5000HD series features a 10.1-inch capacitive touch screen that supports multiple gestures for common waveform operations. Combined with multiple one-touch keys on the front panel, this greatly optimizes the efficiency of oscilloscope operation and improves the user experience.



## Mainstream touchscreen design providing intelligent interactive experience

Featuring a 10.1-inch HD capacitive multi-touch screen, it supports a variety of gesture operations such as touch, drag, zoom and rectangle drawing. This makes operation more convenient and smoother, and helps the user learn the instrument more easily. It retains the traditional key and knob operation while also supporting mouse and keyboard, making instrument operation more versatile and greatly improving the interactive experience.

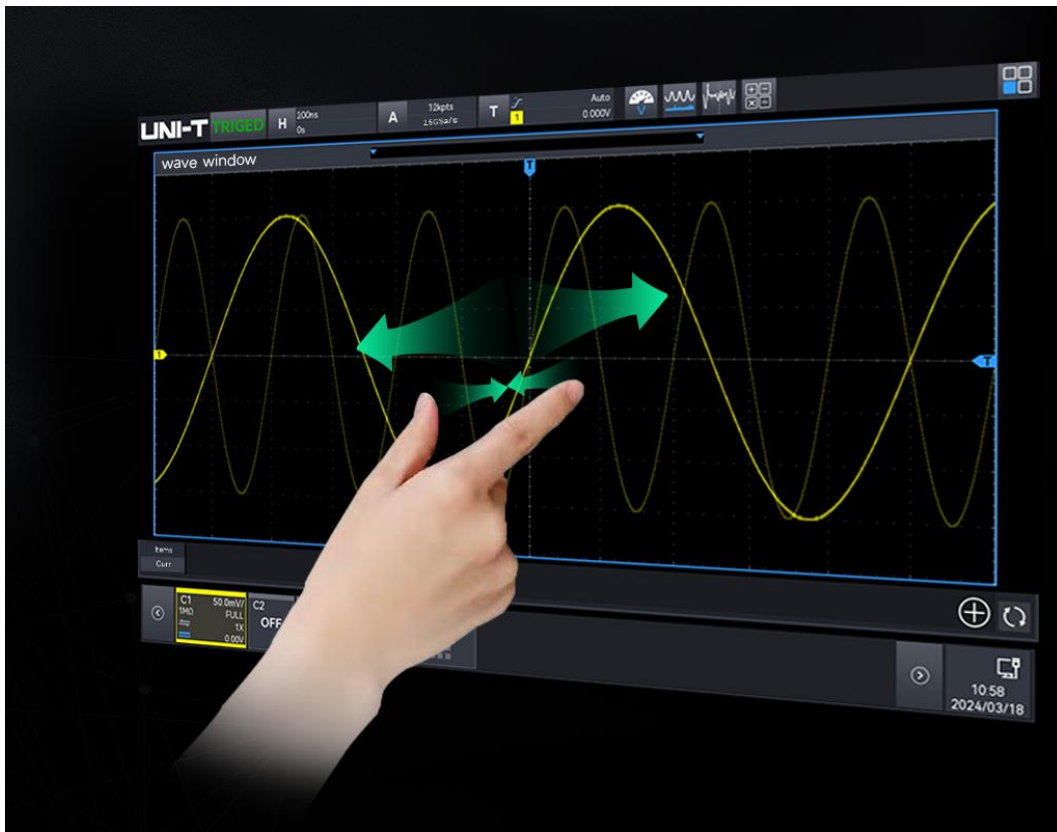

# Brand new appearance design

MSO5000HD series features an innovative appearance with a double-sided thinning design. The display is aligned horizontally with the panel to enhance touch operation and visibility range. The black frame margin, combined with the metal grey and black body, enhances the overall sense of the instrument.



## Features and Advantages

- Analog channel bandwidth: 1 GHz/500 MHz/350 MHz
- Real-time sampling rate of the analog channel is up to 5 GSa/s. The maximum sampling rate of the digital channel is 1.25 GSa/s.
- 12-bit vertical resolution, with up to 4096 points, ensures that the waveform details are clearly visible.
- 4 analog channels, 16 digital channels, and the memory depth of up to 500 Mpts
- The maximum waveform capture rate is up to 800,000 wfms/s (sequence mode: 1,500,000 wfms/s).
- All-in-One Signal Measurement Platform: Includes a digital oscilloscope, logic analyzer, function/arbitrary waveform generator, spectrum analyzer, digital voltmeter, frequency counter, protocol analyzer, Bode plot analyzer, and power analyzer.
- Built-in 50 MHz equivalent performance dual-channel function/arbitrary waveform generator, supporting load the oscilloscope's on-screen data to Gen arbitrary waveform output in real time, and offering compatibility with multiple built-in arbitrary waveforms.
- Bode plot loop test analysis function designed to analyze the system stability.
- Supports timing analysis for bus: I<sup>2</sup>C, SPI, CAN, I2S
- Parameter measurement adds histogram and line graph display.
- Uninterrupted hardware real-time waveform recording and analysis of up to 400,000 frames and supports USB memory export function.
- Enhanced FFT of up to 4M points, supporting the spectrum analyzer functions such as frequency setting, waterfall curve, detection setting, and marker.
- Supports ERES (enhanced resolution) of up to 4-bit
- 56 kinds of parameter measurements
- Multi-Windows display
- Multi-channel 7-digit hardware frequency meter supports frequency refresh time and adjustable effective digit settings.
- DVM multi-channel RMS measurement: DC, AC RMS, and DC+ACRMS
- Multiple trigger types: edge, pulse width, video, ramp, runt pulse, over-amplitude pulse, delay, timeout, duration, setup & hold, Nth edge, code pattern, and extreme value trigger.
- Protocol triggering and decoding function: RS232/UART, I<sup>2</sup>C, SPI, CAN, CAN-FD, LIN, FlexRay, Audio, MIL-STD-1553B, Manchester, SENT, ARINC429, 1-WIRE, CAN-XL, I3C.
- Zone trigger for capturing sporadic signals and observing complicated signals.

- Ultra Phosphor 3.0 provides a super fluorescent display effect with up to 256 levels of gray.
- 10.1-inch 1280x800 HD capacitive multi-touch screen supports gesture control such as click, slide, zoom, edit, and drag
- Multiple peripheral interfaces: USB Host, USB Device, LAN, EXT Trig, AUX Out (Trig Out, Pass/Fail, DVM), Gen Out, HDMI
- Supports SCPI (Standard Command for Programmable Instruments)
- Built-in WebServer for accessing and controlling the instrument through a browser, supporting access from PC and mobile devices for cross-platform compatibility.
- Supports on-line update

# Design Features

## High-resolution

12-bit high-resolution ADC sampling has a quantization level of up to 4096, which is 16 times that of a traditional 8-bit ADC, allowing for better restoration of waveform details.



8-bit




12-bit




The excellent background noise, which is only 75  $\mu\text{V}_{\text{rms}}$  at the full bandwidth of 1 GHz, allows the 12-bit ADC to perform optimally.

## Application Scope

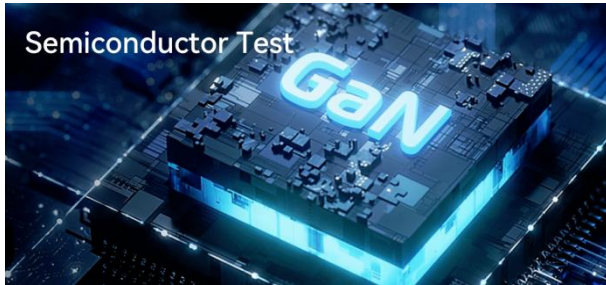

## All-in-One Signal Measurement Platform

The MSO5000HD series high-resolution oscilloscopes integrate multiple independent instruments into a single platform, including a digital oscilloscope, logic analyzer, function/arbitrary waveform generator, spectrum analyzer, digital voltmeter, high-precision frequency counter, protocol analyzer, Bode plot analyzer, and power analyzer. This all-in-one design provides users with a flexible and cost-effective solution for a wide range of measurement needs.

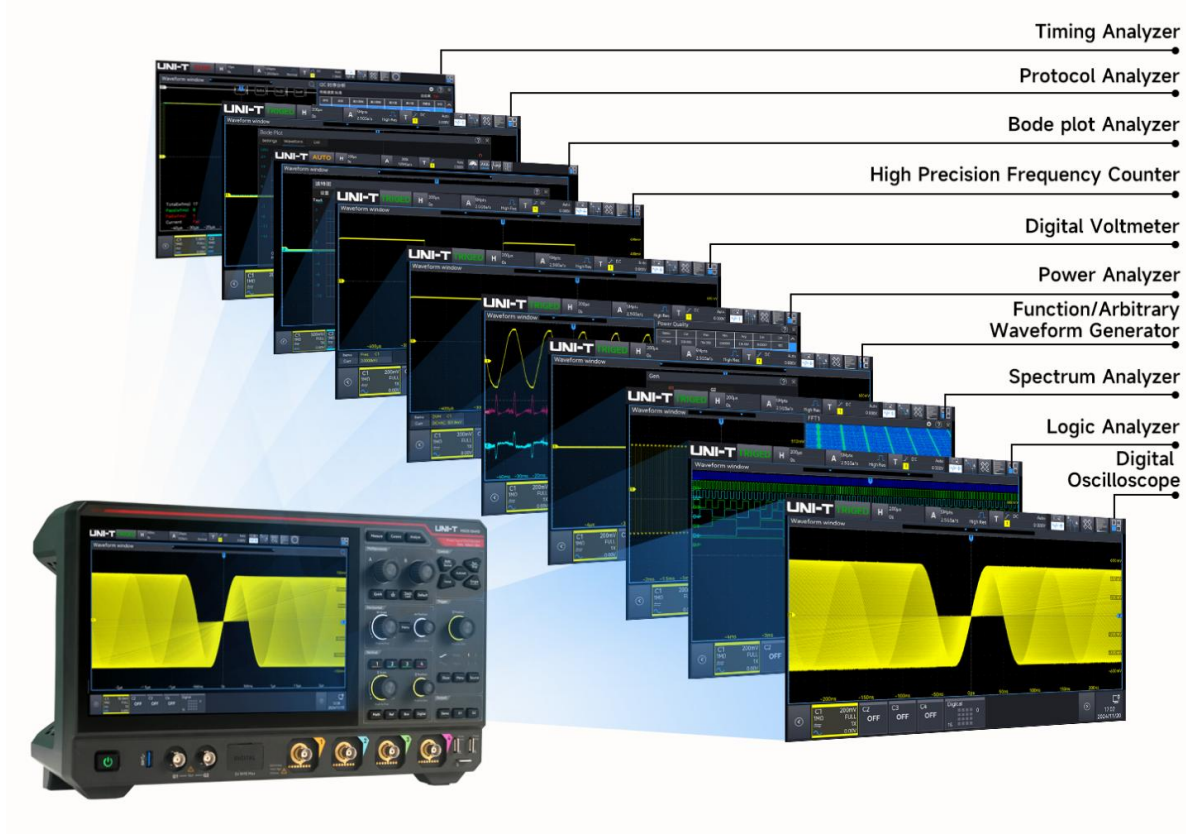

## Digital Oscilloscope

- Bandwidth: 1 GHz/500 MHz/350 MHz
- Maximum real-time sampling rate: 5 GSa/s
- Maximum memory depth: 500 Mpts
- 4 analog channels, 1 external trigger channel




## Logic Analyzer (Option)

- 16-channel logic analyzer (hardware standard) can be used with the purchase of a UT-M15 logic analyzer probe (optional).
- Maximum sampling rate: 1.25 GSa/s
- Maximum memory depth: 500 Mpts
- Minimum detectable pulse width: 800 ps
- Digital probe provides separate high 8-bit and low 8-bit connections, it simplifies the connection of DUT. When connecting to square pins, UT-M15 can be connected directly to 8x2 square pins (2.54 mm).
- Logic analyzer probe UT-M15 has great electrical characteristics, with the input impedance of  $101\text{ k}\Omega \pm 1\%$  and the capacitive load of only 9.0 pF.




## Function/Arbitrary Waveform Generator (Option)

- 50 MHz equivalent performance dual-channel output
- Sampling rate: 312.5 MSa/s
- Vertical resolution: 16-bit
- Multiple built-in standard waves: Sine, square, pulse, ramp, arbitrary, noise, and DC
- AM, FM, ASK, FSK, and sweep frequency output

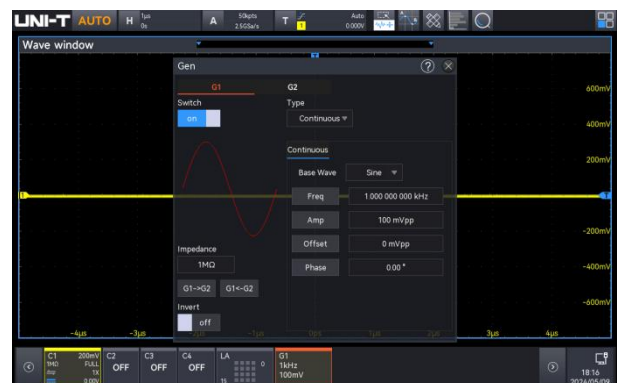

## Spectrum Analyzer

- Standard enhanced FFT with up to 4 Mpts for 4-channel signal analysis
- Frequency range: 0 to 2.5 GHz
- Waterfall curve
- 4 traces and 4 detections
- Mark type: Auto, manual, and threshold
- Marker point list

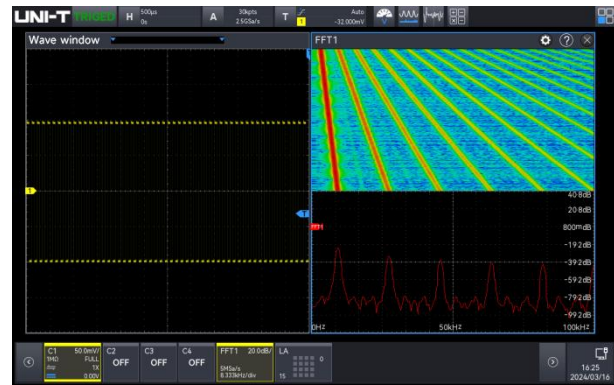

## Digital Voltmeter

- 4-digit voltmeter
- Measurement: DC, AC RMS, and AC+DCRMS
- Limit alarm



## High-precision Frequency Meter

- 7-digit hardware frequency meter
- Frequency meter: Refresh time and adjustable effective digit settings
- Summary counter



## Bode Plot Analyzer (Option)

- Built-in function/arbitrary waveform generator
- Frequency response analysis
- Loop stability analysis
- Filter analysis
- Amplifier analysis



## Protocol Analyzer

- 15 kinds of triggering and decoding protocols including those for computers, embedded serial buses, automobile, aerospace, and audio applications.
- Decoding can be operated in the pause and record modes.
- Supports event list and search function



Option Name	Description	Option Model	Standard/Option
Computer serial bus triggering and analysis	RS-232/422/485/UART	-	Standard
Embedded serial bus triggering and analysis	I <sup>2</sup> C, SPI	-	Standard
Automobile serial bus triggering and analysis	CAN	-	Standard
Automobile serial bus triggering and analysis	LIN	-	Standard
Automobile serial bus triggering and analysis	CAN-FD	MSO5000HD-CANFD	Option
Automobile serial bus triggering and analysis	CAN-XL	MSO5000HD-CANXL	Option
Automobile sensor bus triggering and analysis	FlexRay	MSO5000HD-FLEX	Option
Computer serial bus triggering and analysis	SENT	MSO5000HD-SENT	Option
Audio serial bus triggering and analysis	Audio	MSO5000HD-AUDIO	Option
Aerospace serial bus triggering and analysis	MIL-STD-1553	MSO5000HD-MIL 1553	Option
Aerospace serial bus triggering and analysis	ARINC 429	MSO5000HD-ARI NC429	Option
Wireless communication trigger and analysis	Manchester	MSO5000HD-MANCH	Option
Sensor bus triggering and decoding	1-WIRE	MSO5000HD-1WIRE	Option

Mobile phone serial bus triggering and decoding	I3C	MSO5000HD-I3C	Option
---	-----	---------------	--------

## Power Analyzer (Option)

With the development of chip technology, the requirements for power supply systems are also increased. Nowadays, low-voltage, high-current power supply networks have become a trend. Especially for chips or networks composed of precision components, it is essential to ensure reliable power supply and noise suppression across various parts of the circuit, as well as to maintain the integrity of signal transmission between chips. This presents greater challenges for power supply testing. Designers are now more focused on energy-efficient power supplies and response speed to ensure the power supply remains stable and clean. Based on this, power integrity testing becomes particularly important. Power integrity directly affects signal integrity, and conversely, signal quality also reflects power quality. Furthermore, power quality can cause a series of electromagnetic interference issues, which can be a significant concern for designers. Therefore, having an oscilloscope capable of power analysis is undoubtedly your best choice.

MSO5000HD series provides a comprehensive set of power analysis tools and evaluation results. To use them, simply select the appropriate analysis type and connect the voltage probe and current probe to the power system test point or specified test fixtures, as shown in the diagram. Then, connect to the desired channel for observation and make any necessary fine-tuning adjustments to achieve your desired results.

- Power Quality
- Harmonic Analysis
- Switching Loss
- Transient response\*
- Surge Current
- Rds(on)
- Slew Rate
- Power efficiency\*
- Safe Operating Area
- Modulation Analysis
- Ripple Analysis
- Turn On/Off



“\*\*” indicates features being added. Power analysis support is subject to the latest firmware available on the official website.

## Timing Analyzer


Intelligent products such as mobile phones, smart wearables, home appliances, multimedia audio-video equipment, and automobile electronic accessories have strict requirements for the consistency of internal bus communication timing. MSO5000HD timing analysis function can analyze parameters like pulse width, amplitude, edge, setup time, and hold time for signals for I<sup>2</sup>C, SPI, CAN, and I2S. Additionally, it supports exporting conformance test reports.



## Ultra Phosphor 3.0

When attempting to identify and debug occasional or intermittent anomalies in signals, the waveform capture rate is a crucial indicator. This rate represents the oscilloscope's ability to capture waveforms per unit of time, reflecting its speed in processing and analyzing signals.

MSO5000HD series uses advanced software and hardware architecture to achieve 5 to 10 times higher data processing performance than previous generation products. Equipped with Ultra Phosphor 3.0, it supports 8-channel parallel graph mapping, with a processing rate of up to 20 Gbps and the waveform capture rate of up to 800,000 wfms/s, and up to 1.5 million 350 ps fast edge signals in sequence mode, facilitating easy and accurate capture of occasional signals.

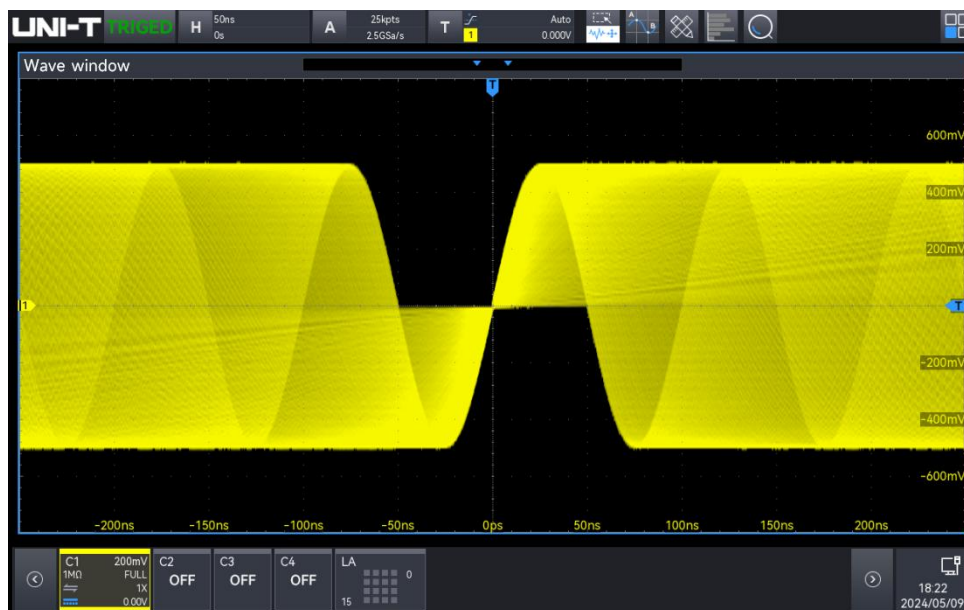

## Brand New Quick Autoset Strategy

Fuzzy control is an intelligent control method based on fuzzy set theory, fuzzy linguistic variables, and fuzzy logic reasoning. The advantages of the algorithm are fewer iterations, faster speed, and better anti-interference ability.

In the past, oscilloscopes performed Autoset to find the appropriate signal amplitude and frequency for display. However, the response speed varied significantly among oscilloscope manufacturers due to different solutions adopted. This inconsistency affected the user experience.

UNI-T has redefined Autoset execution by adopting a fast fuzzy algorithm based on analog signals and multi-channel parallel processing technology. This is complemented by a 7-bit high-precision hardware frequency counter, allowing the oscilloscope to quickly find and process the amplitude and frequency of unknown signals during Autoset execution. The entire channel can be opened in

less than 1.5s, and a single channel in less than 1s, greatly enhancing working efficiency and reducing the risk of misuse for users who frequently change test objects and require rapid testing.

## Multiple Parameter Measurements

Parameter measurement is a crucial function for engineers when using an oscilloscope. MSO5000HD series provides 56 measurement parameters, with the capability to display up to 27 measurement parameters simultaneously. Each page of measurement statistics displays 9 parameters, which can be presented in bar chart and line chart. The bar chart visually represents the probability distribution of the parameters, while the line chart reflects parameter changes over time. The parameter snapshot displays 39 test items for single-channel measurement. These include voltage and time measurement parameters, with measured results constantly refreshed during the process. MSO5000HD series introduces a new amplitude calculation strategy, incorporating top and bottom strategies, making it convenient for engineers to utilize the parameter measurement function. Additionally, MSO5000HD series now includes a burst function that displays burst parameters, enabling accurate and immediate analysis of channel measurement data.



## Region Histogram

The histogram performs probability statistics on the vertical and horizontal directions of the waveform, allowing for jitter analysis and signal integrity analysis.

**Jitter analysis:** The histogram plays a crucial role in jitter analysis. By using histograms, we can statistically analyze the range and distribution of many data samples, thereby verifying the performance and quality of the product, as well as identifying and diagnosing intermittent issues.

Histograms are especially useful for analyzing random events such as noise or jitter, as they help in the analysis and verification of jitter.

**Signal integrity analysis:** In signal integrity analysis, histograms are used to display the amplitude distribution of the signal. By observing the histogram, we can assess the stability and quality of the signal, promptly detect any abnormal values or fluctuations in the signal and ensure its integrity and reliability.

Observing jitter in the horizontal direction




Observing jitter in the vertical direction



## Mathematical Operation

MSO5000HD series provides a system of algorithms for complex waveform operations, allowing you to further process waveforms and display the results directly on the oscilloscope.


- Basic operation: +, -, \*, ÷
- Digital filter: High-pass, low-pass, band-pass, and band-limit
- Custom function operation: Analog channel, and Math

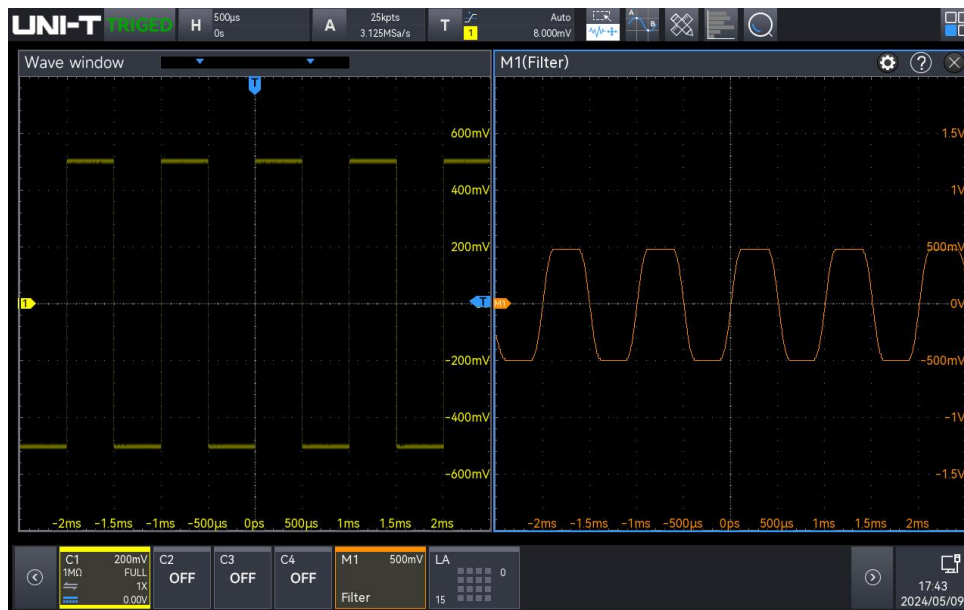

## Navigation and Search


The memory depth of MSO5000HD series is upgraded to 500 Mpts, allowing it to capture tens of thousands of waveforms in one capture. For engineers, manually searching for waveforms is highly time-consuming. The navigation and search function can improve efficiency and save time.

MSO5000HD series provides customizable search conditions, which are very useful for locating sampled signals and finding waveforms of interest. With the analysis function, events can be analyzed in detail, eliminating the time-consuming and inconvenient process of manual searches. The navigation and search function supports event navigation, time navigation, and marker navigation.

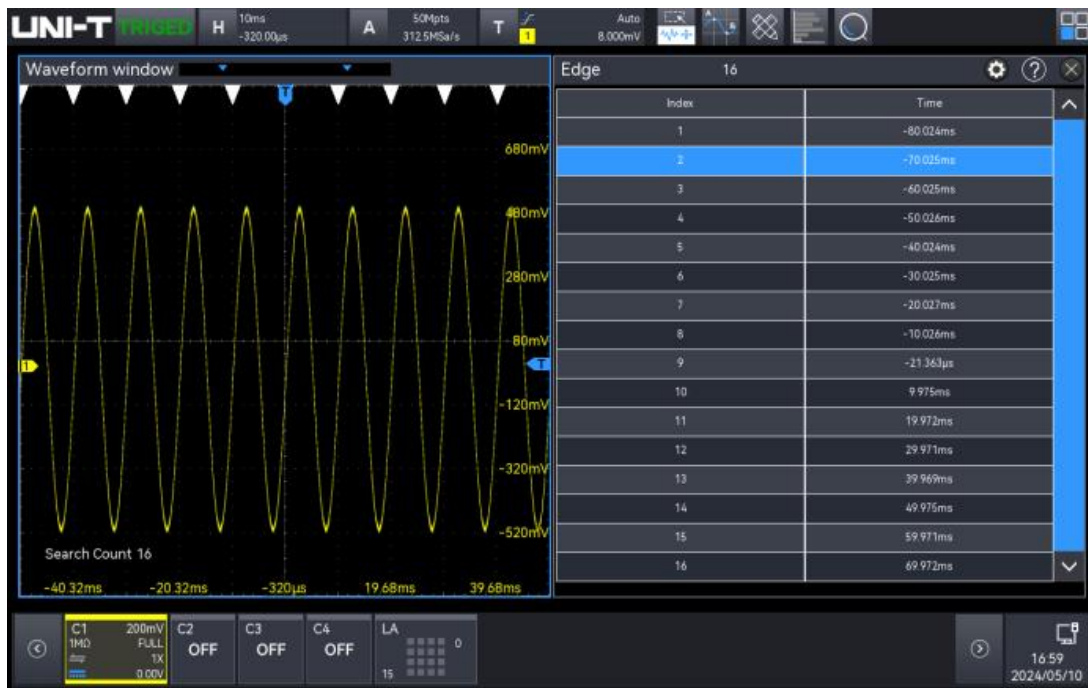

## Hardware-accelerated Template Test


Using hardware-accelerated template testing, the waveform test can be completed in a few seconds to meet special standards.

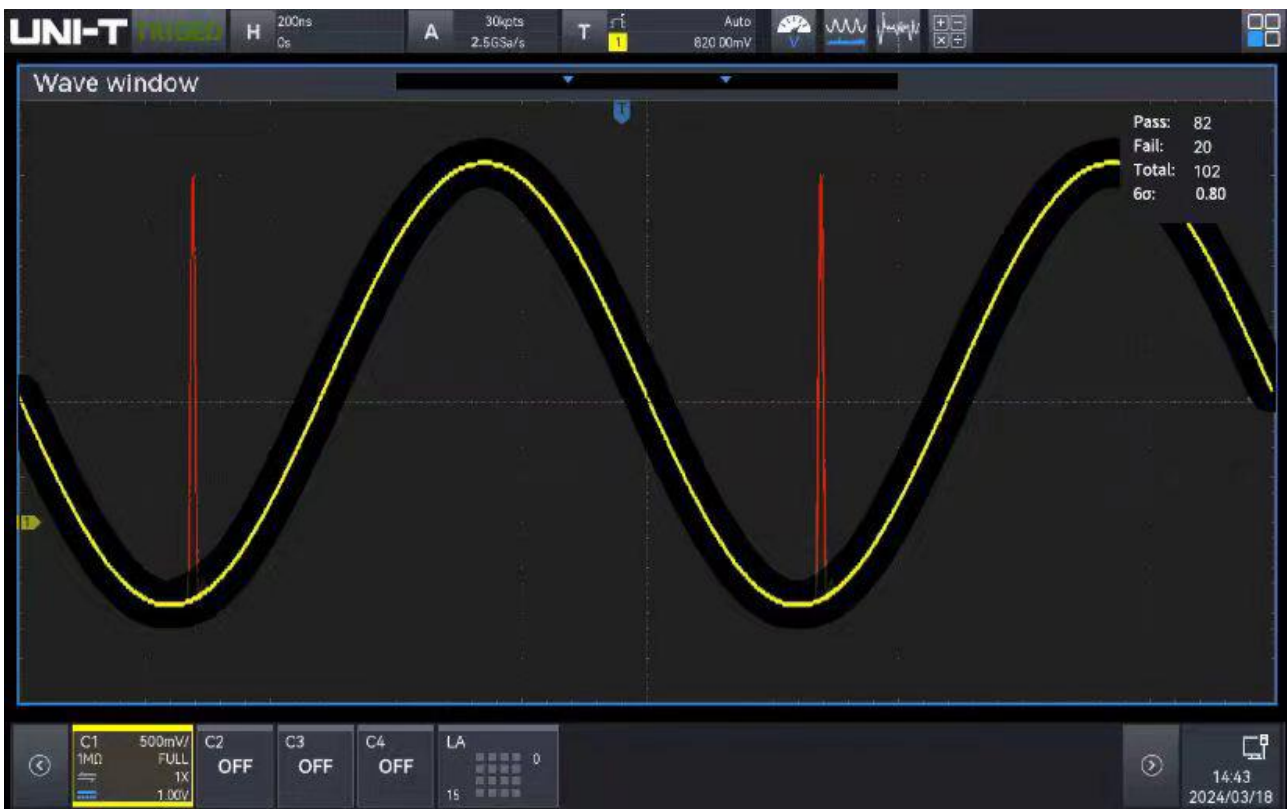

## Zone Trigger

The zone trigger function serves two purposes: firstly, to isolate occasional abnormal signals, and secondly, to stabilize the waveform display. Only a stable trigger can provide a stable waveform display. With this function, engineers can handle complex and variable signals during debugging. The zone trigger function is easy to use, so engineers don't have to spend time learning how to use it.

A rectangle drawing gesture can quickly isolate a signal to be observed. The waveform does not have to be completely stable to trigger; the zone trigger function can capture a waveform that meets the specified conditions and stabilize it for triggering.

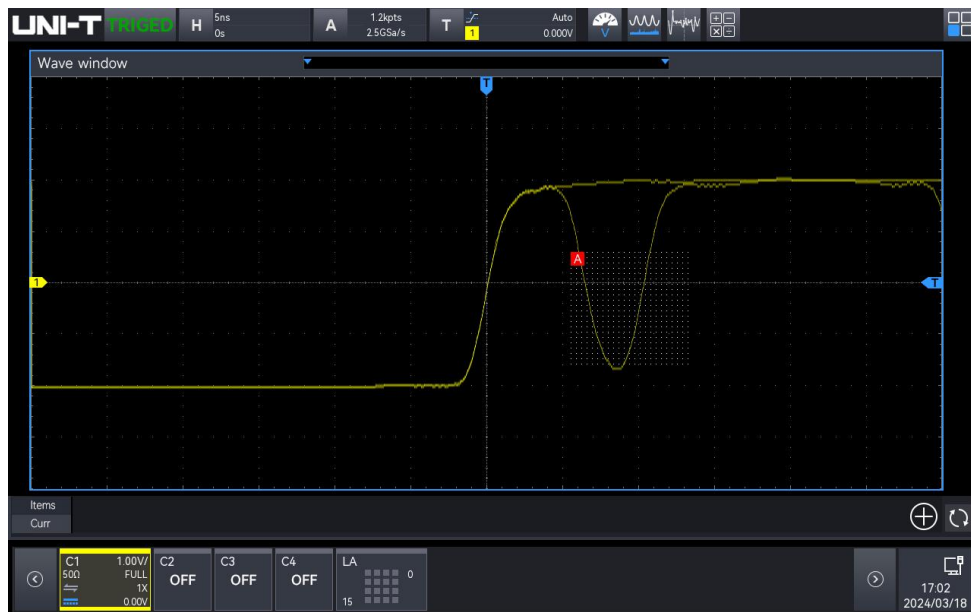

## Various Connection

MSO5000HD series offers a wide range of connections with flexibility and convenience.



## Multiple Control Methods

Control or secondary development through the instruction set conforming to the SCPI standard.

```
def test_square_character(dst_instr, src_instr, image_list, sheet_list, test_para, show_channel1234_9000T):
    test_para['AutoTest'] = True
    dst_instr.write("*RST")
    src_instr.write("*RST")
    time.sleep(3)
    dst_instr.write(":ACQ:TYPE AVER")
    dst_instr.write(":ACQ:AVER:COUN 8")
    time.sleep(1)
    data = dst_instr.query("SYSTEM:INFO")
    dataArray = data.split(',')
    channelNumbers = 4
    for i in range(channelNumbers):
        srcChannelNumber = i + 1
        dstChannelNumber = i + 1
        channelName = 'CH{0}'.format(dstChannelNumber)
        src_instr.write(":CHANNEL{0}:BASE:WAVE SQUARE".format(srcChannelNumber))
        src_instr.write(":CHANNEL{0}:OUTPUT,1".format(srcChannelNumber))
        dst_instr.write(":CHAN{0}:DISP ON".format(dstChannelNumber))
        time.sleep(1)
        dst_instr.write(":CHAN{0}:COUP DC".format(dstChannelNumber))
        dst_instr.write(":WAVEform:SOURce CHAN{0}".format(dstChannelNumber))
        dst_instr.write(":WAVEform:MODE Normal")
        dst_instr.write(":WAVEform:FORMat BYTE")
        for amp, vbase in zip(amps, vbases):
            src_instr.write(":CHANNEL{0}:BASE:AMPLitude {1}".format(srcChannelNumber, amp))
            time.sleep(0.5)
            dst_instr.write("TRIGger:SOURce CHANnel{0}".format(dstChannelNumber))
            dst_instr.write("CHAN{0}:SCAL {1:.6f}V".format(dstChannelNumber, vbase))
            time.sleep(0.1)
        for freq, timeBase, precision in zip(freqs, times, precisions):
            if (freq <= 100):
```

### UNI-T free instrument manager for control.

It can be controlled by installing instrument management software on the PC side through LAN, or USB Device.




## WebServer

SCPI for remote checking and control

Export waveform files

Browsing the user manual online

PC/Mobile phone access

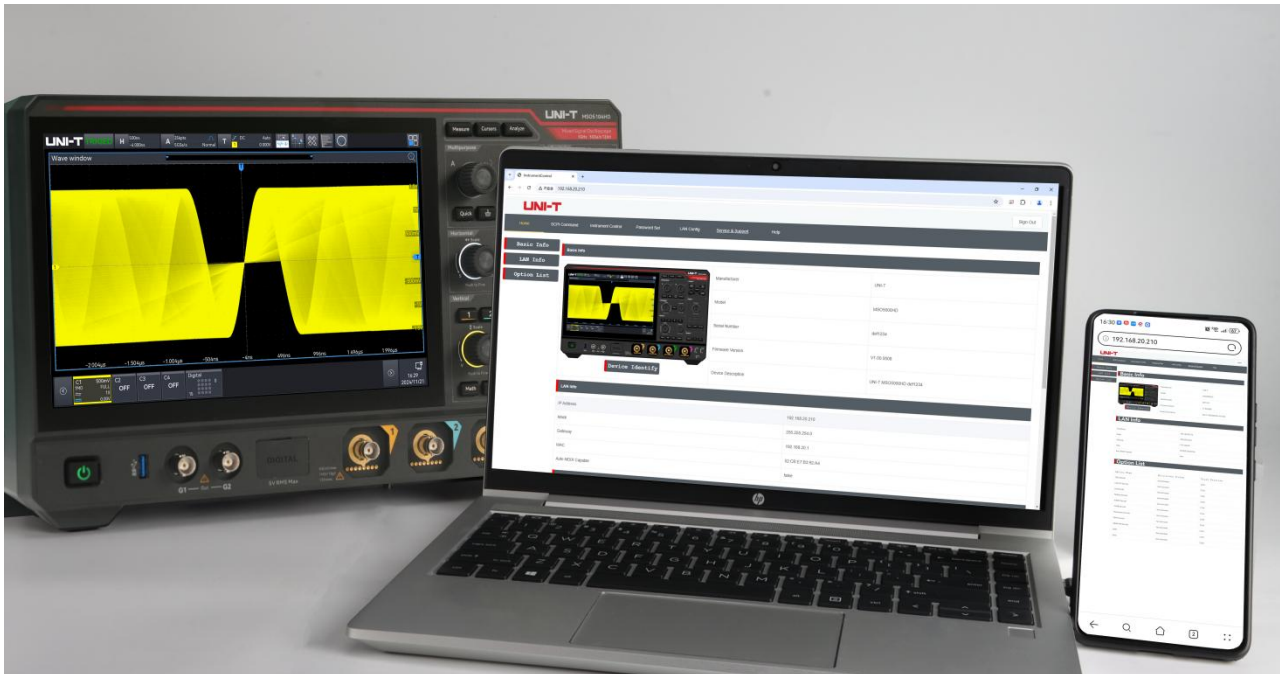

## Document Version Revision Notes

<b>Document Version</b>	<b>V1.0</b>
Document Revision Content	Initial version
Firmware Version: V1.00.0018 Logical Version: V1.00.0003 Hardware Version: V1.01.0000	
<b>Document Version</b>	<b>V1.1</b>
Document Revision Content	Modified channel offset range, and Gen sampling rate Added Bode plot mode, and digital bandwidth adjustment range
Firmware Version: V1.00.0042 Logical Version: V1.00.0003 Hardware Version: V1.01.0000	
<b>Document Version</b>	<b>V1.2</b>
Document Revision Content	Added power analysis types, including transient response and efficiency Modified the Gen DC offset accuracy
Firmware Version: V1.00.0082 Logical Version: V1.00.0013 Hardware Version: V1.02.0000	

## Technical Specifications

All specifications are guaranteed, except those marked "Typical (Typ.)".

Unless otherwise stated, all the performance characteristics are suitable for the probe attenuation ratio is set to 10x and MSO5000HD series mixed signal oscilloscope.

To meet these specifications, the oscilloscope should first meet the following conditions.

- The instrument must be operated continuously for at least thirty minutes at the specified operating temperature.
- The self-calibration must be performed when the operating temperature reaches or exceeds 5°C.

Model	MSO5104HD	MSO5054HD	MSO5034HD
Analog bandwidth (50 Ω, -3 dB)	1 GHz	500 MHz	350 MHz
Analog bandwidth (1 MΩ, -3 dB)	500 MHz	500 MHz	350 MHz
Calculated rise time (10 to 90%) (Typ.)	≤ 0.35 ns	≤ 0.70 ns	≤ 1.00 ns
Input/output channel number	4 analog channels		
	16 digital channels		
	2-channel signal output		
Sampling mode	Real-time sampling		
Acquisition mode	Normal, peak detect, high resolution, averaging, enhanced resolution		
ERES	Enhanced bit: 1, 1.5, 2, 2.5, 3, 4 (12 to 16-bit)		
Maximum sample rate	Analog channel: 5 GSa/s (interweave mode), 2.5 GSa/s (non-interweave mode)		
	Digital channel: 1.25 GSa/s		
Average	After all channels have reached N samples simultaneously, the number of N times can be selected from 2, 4, 8, 16, 32, 64, 128, 256, 512, 1024, 2048, 4096, 8192.		
Memory depth	Auto (limit to 5 Mpts), 25 kpts, 250 kpts, 500 kpts, 5 Mpts, 50 Mpts, 100 Mpts, 500 Mpts		
Maximum waveform capture rate	800,000 wfms/s		
	1,500,000 wfms/s (sequence mode)		
Sequential sampling	Maximum 400,000 frames, minimum two trigger intervals < 700 ns		
Hardware real-time waveform recording and playing	400,000 frames		

Screen	10.1 - inch 1280x800 HD capacitive touch screen (fully laminated)
--------	---

### Vertical System (Analog channel)

Input coupling	DC, AC, GND
Input impedance	(1 M $\Omega$ $\pm$ 1%)    (16 pF $\pm$ 2 pF) 50 $\Omega$ $\pm$ 1%
Probe attenuation factor	Voltage probe ratio: 0.001X, 0.01X, 0.1X, 1X, 10X, 100X, 1000X, Custom Current probe ratio: 5 mV/A, 10 mV/A, 50 mV/A, 100 mV/A, 200 mV/A, 500 mV/A, 1 V/A, Custom
Maximum input voltage	1 M $\Omega$ : 400 V (DC+ACVpk) 135 V <sub>RMS</sub> 50 $\Omega$ : 5 V <sub>RMS</sub> Max
Vertical resolution	12-bit (ERES is enabled with a maximum of 16-bit)
Vertical scale	500 $\mu$ V/div to 10 V/div (1 M $\Omega$ ) 500 $\mu$ V/div to 1 V/div (50 $\Omega$ )
Offset range	500 $\mu$ V/div to 100 mV/div: $\pm$ 2 V (50 $\Omega$ and 1 M $\Omega$ ) 102 mV/div to 1 V/div: $\pm$ 5 V (50 $\Omega$ ) 102 mV/div to 1 V/div: $\pm$ 20 V (1 M $\Omega$ ) 1.02 V/div to 10 V/div: $\pm$ 200 V (1 M $\Omega$ ) Vertical offset reading: V
Band limit (typical)	50 $\Omega$ : 20 MHz, Full, Digital BW 1 M $\Omega$ : 20 MHz, Full, Digital BW Digital bandwidth processing is handled at the back-end of digital signal processing, with an adjustable range: 50Hz - maximum analog bandwidth
Low-frequency response	(AC coupling, -3 dB); $\leq$ 5 Hz (on BNC)
DC gain accuracy	< 5 mV: $\pm$ 2% full scale, $\geq$ 5 mV: $\pm$ 1.5% full scale
DC offset accuracy	$\pm$ (2%+0.1 div+2 mV)
Unit	W, A, V and U, default: V
Channel-to-channel isolation (Typ.)	DC to maximum bandwidth: > 40 dB

### Digital channel

Threshold	8-channel in one group
Threshold selection	TTL (1.4 V) 5.0 V CMOS (+2.5 V), 3.3 V CMOS (+1.65 V) 2.5 V CMOS (+1.25 V), 1.8 V CMOS (+0.9 V) ECL (-1.3 V) PECL (+3.7 V) LVDS (+1.2 V) 0 V

	Custom
Threshold range	$\pm 20.0$ V, 20 mV stepping
Threshold accuracy	$\pm (100$ mV + threshold setting of 3%)
Dynamic range	$\pm 10$ V + threshold
Input impedance	$(101$ k $\Omega \pm 1\%$ )    $(9$ pF $\pm 1$ pF)
Maximum input voltage	$\pm 20$ V
Minimum voltage swing	500 mVpp
Minimum detectable pulse width (Typ.)	800 ps
Vertical resolution	1 bit
Channel-to-channel deskew range	$\pm 100$ ns
<b>Horizontal System (Analog channel)</b>	
	500 ps/div to 1 ks/div
Time base range	Fine tuning (simultaneously display the current sampling rate and memory depth)
Time base accuracy	$\pm 1$ ppm (initial accuracy); $\pm 1$ ppm (the aging rate of first year); $\pm 3.5$ ppm (the aging rate of ten years)
Time base delay time range	Pre-trigger (negative delay): $\geq 1$ screen width Post-trigger (positive delay): 1 s to 5 ks
	Y-T (default)
	X-Y (CH1-CH2, CH1-CH3, CH1-CH4, CH2-CH3, CH2-CH4, CH3-CH4)
Time base mode	Roll, time base $\geq 50$ ms/div, using the horizontal rotary knob to enter or exit Roll mode
	Scan, time base $\geq 50$ ms/div, user can select Roll or Scan mode
<b>Trigger</b>	
Trigger Sensitivity	CH1-CH4: $\leq 10$ mV/div, The larger value of 1 div or 5 mVpp $> 10$ mV/div, 0.5 div EXT: 400 mVpp, DC to 10 MHz 800 mVpp, 10 MHz to External trigger bandwidth frequency (250 MHz)
	Enable the noise rejection, with trigger sensitivity reducing half
Trigger level range	Internal: $\pm 4$ div from the center of the screen EXT: $\pm 9$ V
Trigger modes	Auto, Normal, Single

Trigger holdoff range	0.0 ps to 10 s
Trigger coupling (Typ.)	DC: Allows all signals to pass
	AC: Blocks the DC component of the input signal
	HF reject: Suppresses high-frequency components of signals above 40 kHz
Noise reject	LF reject: Suppresses low-frequency components of signals below 40 kHz
	Suppress the high-frequency noise of signal, to reduce the error-touched possibility

### Zone Triggering

Zone 2 zones; source: CH1-CH4; Feature: Must Intersect, Must Not Intersect

### Edge

Slope Rising, Falling, Either

Source CH1-CH4, AC Line, EXT, D0-D15

### Runt

Trigger condition  $>$ ,  $<$ ,  $\leq$ ,  $\geq$ , None

Polarity Positive, Negative

Pulse width 3.2 ns to 10 s

Source CH1-CH4, D0-D15

### Window

Polarity Rising, Falling, Either

Trigger condition Enter, Exit, Time

Set 3.2 ns to 10 s

Source CH1-CH4

### Nth edge

Slope Rising, Falling

Idle time 3.2 ns to 10 s

Edge number 1 to 65535

Source CH1-CH4, D0-D15

### Delay

Edge type Rising, Falling

Trigger condition  $>$ ,  $<$ ,  $\leq$ ,  $\geq$ ,  $> <$

Delay time 3.2 ns to 10 s

Source CH1-CH4, D0-D15

### Timeout

Slope Rising, Falling, Either

Timeout 3.2 ns to 10 s

Source	CH1-CH4, D0-D15
<b>Duration</b>	
Code pattern	H, L, X
Trigger condition	>, <, $\leq$ , $\geq$
Duration	3.2 ns to 10 s
Source	CH1-CH4, D0-D15
<b>Setup and Hold</b>	
Clock edge	Rising, Falling
Data type	H, L
Setup	3.2 ns to 10 s
Hold	3.2 ns to 10 s
Source	CH1-CH4, D0-D15
<b>Pulse width</b>	
Polarity	Positive, Negative
Trigger condition	>, <, $\leq$ , $\geq$
Pulse Width	0.8 ns to 4 s
Source	CH1-CH4, AC Line, EXT, D0-D15
<b>Slope</b>	
Slope	Positive, Negative
Trigger condition	>, <, $\leq$ , $\geq$
Time	0.4 ns to 1 s
Source	CH1-CH4
<b>Video</b>	
Standard	PAL, NTSC, SECAM, 525 p/60, 625 p/50, 720 p/24, 720 p/25, 720 p/30, 720 p/50, 720 p/60, 1080 i/25, 1080 i/30, 1080 p/24, 1080 p/25, 1080 p/30, 1080 pfs/24
Source	CH1-CH4
<b>Pattern</b>	
Code pattern	H, L, X, Rising, Falling
Source	CH1-CH4, D0-D15
<b>Extreme Value</b>	
limit Value	Maximum, minimum
Filter Level	0 to 31
Source	CH1 to CH4
<b>RS232/UART</b>	
Trigger condition	Start, StopBit, CheckErrr, Data

Baud rate	2400 bps, 4800 bps, 9600 bps, 19200 bps, 38400 bps, 57600 bps, 115200 bps, custom
-----------	---

Data bit	5 bits, 6 bits, 7 bits, 8 bits
----------	--------------------------------

Source	CH1-CH4, D0-D15
--------	-----------------

## I<sup>2</sup>C

Trigger condition	Start, Restart, Stop, Loss, Address, Data, Address & Data
-------------------	---

Addr mode	7 bits, 10 bits
-----------	-----------------

Addr range	0 to 7F, 0 to 3 FF
------------	--------------------

Byte length	1 to 5
-------------	--------

Source	CH1-CH4, D0-D15
--------	-----------------

## SPI

Mode	Timeout, CS
------	-------------

Trigger condition	Start, Data
-------------------	-------------

Timeout	100 ns to 1 s
---------	---------------

Data bit	4 bits to 32 bits
----------	-------------------

Source	CH1-CH4, D0-D15
--------	-----------------

## CAN

Signal type	CAN_H, CAN_L
-------------	--------------

Trigger condition	Start, Data Frame, Remote Frame, Error Frame, Over-Load, Identifier, Data, Identifier&Data, End of Frame, Missing Ack, Biterror, CRC, Error, ALL Errors
-------------------	---

Data rate	10 kbps, 19.2 kbps, 20 kbps, 33.3 kbps, 38.4 kbps, 50 kbps, 57.6 kbps, 62.5 kbps, 83.3 kbps, 100 kbps, 115.2 kbps, 125 kbps, 230.4 kbps, 250 kbps, 490.8 kbps, 500 kbps, 800 kbps, 921.6 kbps, 1 Mbps, 2 Mbps, 3 Mbps, 4 Mbps, 5 Mbps, custom
-----------	---

Source	CH1-CH4, D0-D15
--------	-----------------

## CAN-FD

Signal type	CAN_H, CAN_L
-------------	--------------

Trigger condition	Start, Data Frame, Remote Frame, Error Frame, Over-Load, Identifier, Data, Identifier&Data, End of Frame, Missing Ack, Bit Error, CRC Error, ALL Errors
-------------------	---

Data rate	10 kbps, 19.2 kbps, 20 kbps, 33.3 kbps, 38.4 kbps, 50 kbps, 57.6 kbps, 62.5 kbps, 83.3 kbps, 100 kbps, 115.2 kbps, 125 kbps, 230.4 kbps, 250 kbps, 490.8 kbps, 500 kbps, 800 kbps, 921.6 kbps, 1 Mbps, 2 Mbps, 3 Mbps, 4 Mbps, 5 Mbps, custom
-----------	---

FD data rate	250 kbps, 500 kbps, 800 kbps, 1 Mbps, 1.5 Mbps, 2 Mbps, 4 Mbps, 6 Mbps, 8 Mbps, custom
--------------	--

Source	CH1-CH4, D0-D15
<b>LIN</b>	
Trigger condition	Sync, Identifier, Data, Identifier & Data, Wake Frame, Sleep Frame, Error
Version	v1.x, v2.x, Either
Baud rate	1.2 kbps, 2.4 kbps, 4.8 kbps, 9.6 kbps, 10.417 kbps, 19.2 kbps, 20 kbps, custom
Data length	1 to 8
Source	CH1-CH4, D0-D15
<b>FlexRay</b>	
Trigger condition	Start, Indicators, Identifier, Cycle, Heade, Data, Identifier & data, End frame, Error
Polarity	BM, BDiff/BP
Baud rate	2.5 Mbps, 5 Mbps, 10 Mbps, custom
Source	CH1-CH4, D0-D15
<b>Audio</b>	
Trigger condition	Word, Left, Right, Any
Format	Standard, Left Aligned, Right Aligned, TDM
Source	CH1-CH4, D0-D15
<b>MIL-STD-1553B</b>	
Trigger condition	Sync, Command, Status, Data, Error
Polarity	Positive, Negative
Source	CH1-CH4
<b>SENT</b>	
Trigger condition	Fast: Sync, Status, Data, CRC, STAT+Data, S&D +CRC, F_ CRC Error, CONT Pul Err Slow: Sync, Short ID, Short Data, Short CRC, Short ID & data, Enh ID, Enh Data, Enh CRC, Enh ID & data, SLO CH CRC error
Source	CH1-CH4, D0-D15
<b>Manchester</b>	
Trigger condition	Start, Header SEG, Data SEG, Tail SEG, Error
Baud rate	1.2 kbps, 2.4 kbps, 4.8 kbps, 9.6 kbps, 10.417 kbps, 19.2 kbps, 125 kbps, 250 kbps, 500 kbps, 1 Mbps, 2 Mbps, 5 Mbps, 10 Mbps, Custom
Source	CH1-CH4, D0-D15
<b>ARINC 429</b>	
Trigger condition	Start bits, End bits, Label, Source/Destination Identifier, Data, Signal/Status Matrix, Label & bits, Parity Error, Bit Error, Gap Error, All Error

Source	CH1-CH4
<b>1-WIRE</b>	
Trigger Condition	Start, Command, Set Command, ID, Data, Custom
Source	CH1-CH4, D0-D15
<b>I3C</b>	
Trigger Condition	I3C: SDR Start, SDR Restart, SDR Stop, SDR Global Broadcast Address, SDR General Command Code, SDR Address, SDR Data, SDR Address & Data, SDR End of Target Reading, SDR Target Reset, SDR Loss Acknowledgment, SDR Checksum Error, HDR Enter, HDR Restart, HDR Exit, HDR_DDR Global Broadcast Address, HDR_DDR General Command Code, HDR_DDR Command Bit, HDR_DDR Data Bit, HDR_DDR Command Bit & Data Bit, HDR_DDR Loss Acknowledgment   Interrupt, HDR_DDR Checksum Error, HDR_DDR CRC Error I2C: SDR Start, SDR Restart, SDR Stop, SDR Address, SDR Data, SDR Address & Data, SDR Loss Acknowledgment
Source	CH1-CH4, D0-D15
<b>CAN-XL</b>	
Trigger Condition	Frame Start, Frame Format, Identifier, Data, ID & Data, SDT, VCID, AF, End of Frame, Loss Acknowledgment, Format Error, CRC Error, All Error
Source	CH1-CH4, D0-D15
<b>Decoding</b>	
Number of decodes	4
Decoding type	Standard: RS232/UART, I2C, SPI, CAN, LIN Option: CAN-FD, FlexRay, Audio, MIL-5TD-1553B, SENT, Manchester, ARINC 429, 1-WIRE, I3C, CAN-XL
Parallel	Up to 18 bits parallel bus decoding, supports the combination of analog channel and digital channel and supports custom time setting
Source	CH1-CH4, D0-D15
<b>Search Navigation</b>	
Type	Edge, pulse width, slope, runt, over-amplitude, delay, timeout, duration, setup & hold, Nth edge, pattern
Source	CH1 to CH4, D0 to D15
Result display	Event list, navigation (Click an event in the event list to jump directly to the corresponding event.)
Navigation	Search event, time, marker
<b>Measurement</b>	
Cursor	Voltage difference between cursors ( $\Delta Y$ ) Time difference between cursors ( $\Delta X$ )

	Reciprocal of $\Delta X$ (Hz) ( $1/\Delta X$ )
	Voltage and time of waveform point
	Display the cursor in the automatic measurement
Automatic measurements	<p><b>Analog channel: 56 kinds of parameter</b>  Maximum, Minimum, Top, Base, Amplitude, Middle, Peak-Peak, Average, Average-Cycles, RMS, RMS-Cycles, AC RMS, AC RMS-Cycles, Area, Area-Cycles, +Area, -Area, +Area-Cycles, -Area-Cycles, +Overshoot, -Overshoot, +Preshoot, -Preshoot, Period, Frequency, Rise time, Fall time, +Width, -Width, +Duty, -Duty, +Pulse count, -Pulse count, Rising edge count, Falling edge count, Burst width, Burst Interval, Burst Period, Burst Per count, Ratio, Period Ratio, Setup time, Hold time, Setup &amp; Hold Ratio, FRFR, FRFF, FFFR, FFFF, FRLF, FRLR, FFLR, FFLF, Delay(r-r), Delay(f-f), Phase(r-r), Phase(f-f)</p> <p><b>Digital channel:</b>  Frequency, Period, +Width, -Width, +Duty, -Duty, +Pulse count, -Pulse count, FRFR, FRFF, FFFR, FFFF, FRLF, FRLR, FFLR, FFLF, Rising delay A→B, Falling delay A→B, Phase A→B, Phase B→A</p>
Measurement mode	Common measurement and accuracy measurement (Full memory hardware measurements)
Measurement type	Simultaneously display 27 kinds of parameter measurement
Measurement range	Main time base, Zoom time base, Cursor area
Measurement statistics	Mean, Maximum, Minimum, Std Dev, Count, Tendency chart, Bar chart
XY measurement	Time, Cartesian, Polar, Product, Ratio
Analysis	Frequency Counter, DVM, Pass/Fail, Waveform recording, Power Analysis, Timing analysis
<b>Histogram</b>	
Source	CH1 to CH4
Type	Horizontal, Vertical
Measurement	Sampling point, peak, maximum, minimum, peak-to-peak, average, median, mode, Bin Width, standard deviation
Mode	Supports all modes except Roll mode
<b>Math</b>	
Waveform math	A+B, A-B, A×B, A÷B, Advanced, Filter
Filter	Low pass, High pass, Band pass, Band stop
Operation	0, 1, 2, 3, 4, 5, 6, 7, 8, 9, $\pi$ , e (+, -, *, /, ^, >, <, &&,   , ==, !=)
Function	sin, cos, sinc, tan, sqrt, exp, lg, ln, floor, abs, acos, asin, atan, sinh, tanh, ceil, cosh, fabs, intg, diff, sign

<b>FFT</b>	
Channel number	4
Window types	Hanning, Hamming, Rectangle, Blackman
FFT count	Up to 4 Mpts
FFT vertical scale	Vrms, dB
FFT	Waterfall: ON, OFF
	Spectrum range: Start frequency, Stop frequency, Center frequency, Span
	Four traces: Normal, Average, Max Hold, Min Hold
	Marker: Marker type, Marker Points, Marker list
<b>Storage</b>	
Setting	Set Status (.set)
Waveform	Waveform data (*.dat) (*.csv) (*.bsv)
Image	Image storage (*.bmp) (*.png) (*.jpg)
Report	Decoding Event List (*.csv) (*.pdf) (*.html)
<b>Gen (Option)</b>	
Channel	2
Sample rate	312.5 MSa/s
Vertical resolution	16-bit
Maximum frequency	50 MHz
Standard	Sine, Square, Ramp, Noise, DC and Arbitrary wave
Built-in arbitrary	200 types including Sinc, ExpRise, ExpFall, Cardiac, Gauss, Lorentz, and HaverSine
	Frequency range: 1 $\mu$ Hz to 50 MHz
Sine wave	Flatness: $\pm$ 0.5 dB (relative to 1 kHz)
	Harmonic distortion: -40 dBc
	Non-harmonic spurious (typ): -40 dBc
	Total harmonic distortion: 1% (DC to 20 kHz, 1 Vpp)
	SNR: 40 dB
Square wave/Pulse wave	Frequency range
	Square wave: 1 $\mu$ Hz to 15 MHz; Pulse wave: 1 $\mu$ Hz to 15 MHz
	Rising/falling time: < 13 ns (Typ.1 kHz, 1 Vpp, 50 $\Omega$ )
	Overshoot: Typ. 2% (1 kHz, 1 Vpp, 50 $\Omega$ )
	Duty ratio
	Square wave: 1% to 99%, adjustable; Pulse wave: 1% to 99%, adjustable
	Resolution of duty ratio: 1% or 10 ns (take the greater value of both)
Minimum pulse width: 20 ns	

	Resolution of pulse width: 10 ns
	Jitter: 2 ns
Ramp wave	Frequency range: 1 $\mu$ Hz to 400 kHz
	Linearity: 1%
	Symmetry: 0.1% to 99.9%
Noise	Bandwidth: 50 MHz (Typ.)
Arbitrary wave	Frequency range: 1 $\mu$ Hz to 5 MHz
	Waveform length: 8 k
	Internal save position: 200
Frequency	Accuracy: $\pm 1$ ppm (initial accuracy); $\pm 1$ ppm (the aging rate of first year); $\pm 3.5$ ppm (the aging rate of ten years)
	Resolution: 1 $\mu$ Hz
Amplitude	Output range: 20 mVpp to 6 Vpp (high resistance); 10 mVpp to 3 Vpp (50 $\Omega$ )
	Resolution: 1 mV
	Accuracy (Typical value: 1 kHz, sine wave, 0V, deviation): $\pm (5\% + 2 \text{ mVpp})$
DC offset	Range: $\pm 3$ V (high resistance); $\pm 1.5$ V (50 $\Omega$ )
	Resolution: 1 mV
	Accuracy: $\pm 3\%$ of offset setting $\pm 6\%$ of amplitude setting $\pm 2$ mV

**AM**

Carrier wave	Sine, Square, Ramp, Arbitrary wave
Source	Internal
Modulated wave	Sine, Square, Rising ramp, Falling ramp, Noise, Arbitrary wave
Modulation frequency	2 MHz to 50 kHz
Modulation depth	0% to 120%

**FM**

Carrier wave	Sine, Square, Ramp, Arbitrary wave
Source	Internal
Modulated wave	Sine, Square, Rising ramp, Falling ramp, Noise, Arbitrary wave
Modulation frequency	2 MHz to 50 kHz
Deviation	12.5 MHz (Maximum)

**ASK**

Carrier wave	Sine, Square, Ramp, Arbitrary wave
Modulated wave	Square wave (Duty ratio 50%)

Modulation frequency	2 mHz to 50 kHz
<b>FSK</b>	
Carrier wave	Sine, Square, Ramp, Arbitrary wave
Modulated wave	Square wave (Duty ratio 50%)
Modulation frequency	2 mHz to 50 kHz
Hopping frequency	Any frequency within the range of the Carrier wave signal
<b>Sweep</b>	
Mode	Linear, Logarithmic
Sweep time	1 ms to 500 s
Start and stop frequency	Any frequency within the range of the waveform
<b>Waveform Recording</b>	
Source	All active analog channel
Analysis	Supports frame-by-frame or continuous playback, allowing operations and measurements on the currently displayed waveform
<b>Pass/Fail Test</b>	
Source	C1 to C4
Pass/Fail action	Immediate stop, buzzer activation, screenshot capture
<b>Bode plot</b>	
Mode	Bode plot, PSRR (Power Supply Rejection Ratio)
Start frequency	50 Hz to 50 MHz
Stop frequency	60 Hz to 50 MHz
Points	1 to 1000
Output amplitude	High resistance: 20 mVpp to 6 Vpp 50Ω: 10 mVpp to 3 Vpp
<b>DVM (Digital Voltmeter)</b> (All specifications are typical values)	
Source	All analog channels
Function	DC, AC+DC RMS, AC RMS
Resolution	4-digit
Limit alarm	Within or exceed the specified limit range
Measurement range	Vertical range
Measurement window	100 ms
<b>Frequency Counter</b>	
Source	All analog channels, trigger source

Measurement	Frequency, period, accumulate
Counter	Maximum 7 digits; refresh rate and number of significant digits adjustable
Maximum measuring frequency	Maximum bandwidth of analog channel
Time reference	Internal: $\pm 1$ ppm initial accuracy; $\pm 1$ ppm first-year aging; $\pm 3.5$ ppm 10-year aging

### Power Analysis (Option)

Type	Power quality, harmonic analysis, surge current, Rds(on), switching loss, slew rate, safe operating area, modulation analysis, ripple analysis, turn-on/off time, transient response, efficiency
------	--

### Timing Analysis(Option)

Type	I2C, SPI, CAN, I2S
------	--------------------

### Display

Screen	10.1 - inch multi-touch capacitive screen (fully laminated)
Resolution	1280×RGB×800 vertical pixel
Color	24-bit true colors
Persistence	Auto, 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 5 s, 10 s, 20 s, infinite, close
Display type	Point, Vector
Real-Time clock	Time and data (user-defined)
Waveform Intensity	1% to 100% (default 50%)
Grid Intensity	0% to 100% (default 50%)
Backlight Intensity	1% to 100% (default 50%)
Transparent	0% to 100% (default 50%)

### Interface

USB-Host 3.0	1 on the front panel, 2 on the rear panel
USB-Device 3.0	1 on the rear panel
LAN	LAN (VXI11), 10/100/1000 Base, RJ-45
AUX Out	Trig Out, Pass/Fail, DVM
Gen Out	2 on the front panel
10 MHz reference input	50 $\Omega$ , amplitude 400 mVpp to 4.5 Vpp (-3.979 dBm, 17.044 dBm), frequency 10 MHz $\pm$ 10 ppm
10 MHz reference output	50 $\Omega$ , 1.65 Vpp square wave
HDMI <sup>1</sup>	1 port for external display or projector

### General technical specification

#### Probe compensator output

Output voltage	3 Vp-p
----------------	--------

Frequency	10 Hz ,100 Hz, 1 kHz (default), 10 kHz, 3V-REF	
<b>Power Source</b>		
Power source	100 V to 240 VAC (fluctuation: $\pm 10\%$ ), 50 Hz/60 Hz	
voltage	100 V to 120 VAC (fluctuation: $\pm 10\%$ ), 400 Hz	
Power consumption	120 W Max	
Fuse	3 A, F-class, 250 V	
<b>Environmental</b>		
Temperature	Operating: 0°C to + 40°C	
	Non-operating: -20°C to +70°C	
Cooling	Forced cooling by fan	
Humidity	Operating: below + 35 °C, relative humidity $\leq 90\%$ ; non-operating: + 35 °C to + 40 °C, relative humidity $\leq 60\%$	
Altitude	Operating: below 3,000 meters; non-operating: below 15,000 meters	
Pollution degree	2	
Operating environment	In-door	
<b>Mechanical Specifications</b>		
Dimension (W×H×D)	361 mm×209 mm×106 mm	
Weight	3.97 kg	
<b>Calibration interval</b>		
Calibration interval	1 year	
<b>Safety Regulations</b>		
	Compliance with EMC directive (2014/30/EU), compliance with or superior to IEC 61326-1:2021/ EN61326-1:2021, IEC 61326-2-1:2021/ EN61326-2-1:2021	
Electromagnetic compatibility	Conducted disturbance	CISPR 11/EN 55011 CLASS B group 1, 150 kHz-30 MHz
	Radiation disturbance	CISPR 11/EN 55011 CLASS B group 1, 30 MHz-1 GHz
	(ESD)	IEC 61000-4-2/EN 61000-4-2 4.0 kV (contact), 8.0 kV (air)
	Radio sensitivity	IEC 61000-4-3/EN 61000-4-3 3V/m (80 MHz to 1 GHz) 3V/m (1.4 GHz to 6 GHz)
	Electrical fast transient	IEC 61000-4-4/EN 61000-4-4 $\pm 1$ kV (AC input)

	(EFT)	
Surge	IEC 61000-4-5/EN 61000-4-5	±0.5 kV (live to zero) ±1 kV (live/zero to ground)
Radio continuous sensitivity	IEC 61000-4-6/EN 61000-4-6	3 V, 0.15-80 MHz
Voltage dip and short-term interruption	IEC 61000-4-11/EN 61000-4-11	Voltage dip: 0% UT during 0.5 cycle 0% UT during 1 cycles 70% UT during 25/30 cycles Short-term interruption: 0% UT during 250/300 cycles
Safety specification	EN 61010-1:2010+A1:2019 EN IEC61010-2-030:2021+A11:2021 BS EN61010-1:2010+A1:2019 BS EN IEC61010-2-030:2021+A11:2021	

## Remarks

1: only support standard HDMI, not support other adapters.

## Order Information







	Description	Order No.
Model	MSO5104HD (1 GHz, 4 analog channels+16 digital channels, Gen)	MSO5104HD
	MSO5054HD (500 MHz, 4 analog channels+16 digital channels, Gen)	MSO5054HD
	MSO5034HD (350 MHz, 4 analog channels+16 digital channels, Gen)	MSO5034HD
Standard accessories	National standard cable x 1	
	USB3.0 cable x 1	UT-D30
	BNC-BNC direct-through line x 1	UT-L45
	BNC-red and black alligator connecting wire x 1	UT-L02A
	Passive probe (500 MHz) x 4	UT-P07A
Optional accessories	350 MHz Upgrade to 1 GHz Bandwidth	MSO5000HD-BW3M5T1G
	350 MHz Upgrade to 500 MHz Bandwidth	MSO5000HD-BW3M5T5M
	500 MHz Upgrade to 1 GHz Bandwidth	MSO5000HD-BW5MT1G
	All serial bus triggering and decoding options	MSO5000HD-BND
	Automobile serial bus triggering and decoding option (CAN-FD, FlexRay, SENT)	MSO5000HD-AUTO
	CAN-FD: Automotive serial bus triggering and decoding	MSO5000HD-CAN-FD
	FlexRay: Automotive Serial Bus Trigger and decoding	MSO5000HD-FLEX
	SENT: Automotive sensor serial bus triggering and decoding option	MSO5000HD-SENT
	Audio: Audio serial bus triggering and decoding option	MSO5000HD-AUDIO
	MIL-STD-1553: Aerospace serial bus triggering and decoding	MSO5000HD-MIL1553
	ARINC429: Aerospace serial bus triggering and decoding	MSO5000HD-ARINC429
	MANCHESTER: Wireless communication serial bus triggering and decoding	MSO5000HD-MANCH
	1-WIRE: Triggering and decoding	MSO5000HD-1WIRE
	I3C: Triggering and decoding	MSO5000HD-I3C
CAN-XL: Triggering and decoding	MSO5000HD-CANXL	





Dual channel function/arbitrary waveform generator (includes Bode Plot)	MSO5000HD-GEN
Power analysis	MSO5000HD-PWR
Time sequence analyzer	MSO5000HD-TIMING
Isolation transformer	UT-ISOT
High voltage probe	UT-V23/UT-P21/UT-P20
High voltage differential probe	UT-P30/UT-P31/UT-P32/ UT-P33/UT-P35/UT-P36
Active probe (single-ended)	UT-PA2000
Current probe	UT-P40/UT-P41/UT-P42/ UT-P43/UT-P44/UT-P4030 D/UT-P4150/UT-P4500/UT -P4100A/UT-P4100B
16-channel logic analyzer probe	UT-M15
Deskew Fixture	UT-DF01

Remarks: Please order all hosts, accessories and options from your local UNI-T distributor.



# Oscilloscope Probes and Accessories


## Passive Probe



Model	Type	
UT-P01	High resistance probe	1X: DC to 8 MHz 10X: DC to 25 MHz Oscilloscope compatibility: All UNI-T series
		
UT-P03	High resistance probe	1X: DC to 8 MHz 10X: DC to 60 MHz Oscilloscope compatibility: All UNI-T series
		
UT-P04	High resistance probe	1X: DC to 8 MHz 10X: DC to 100 MHz Oscilloscope compatibility: All UNI-T series
		
UT-P05	High resistance probe	1X: DC to 8 MHz 10X: DC to 200 MHz Oscilloscope compatibility: All UNI-T series
		
UT-P06	High resistance probe	1X: DC to 8 MHz 10X: DC to 300 MHz Oscilloscope compatibility: All UNI-T series
		
UT-P07A	High resistance probe	10X: DC to 500 MHz Input resistance: 10 MΩ Maximum operating voltage: < 600V pk Oscilloscope compatibility: All UNI-T series
		

<p>UT-P08A</p> 	<p>High resistance probe</p>	<p>10X: DC to 350 MHz Input resistance: 10 M<math>\Omega</math> Maximum operating voltage: &lt; 600V pk Oscilloscope compatibility: All UNI-T series</p>
<p>UT-P20</p> 	<p>High resistance probe</p>	<p>DC to 100 MHz Probe coefficient 100:1 Maximum operating voltage: 1500 Vrms Oscilloscope compatibility: All UNI-T series</p>
<p>UT-V23</p> 	<p>High voltage probe</p>	<p>DC to 100 MHz Probe coefficient 100:1 Input resistance: 100 M<math>\Omega</math><math>\pm</math>2% Maximum operating voltage: 2000 Vpp Oscilloscope compatibility: All UNI-T series</p>
<p>UT-P21</p> 	<p>High voltage probe</p>	<p>DC to 50 MHz Probe coefficient 1000:1 Maximum operating voltage: DC 15 kVrms, AC 10 kV (sine wave) Oscilloscope compatibility: All UNI-T series</p>



## Current Probe

Model	Type
<p>UT-P40</p> 	<p>Current probe</p> <p>DC to 100 kHz Range: 50 mV/A, 5 mV/A Current range: 0.4 A to 60 A Maximum operating voltage: 600 Vrms Oscilloscope compatibility: All UNI-T series</p>
<p>UT-P41</p> 	<p>Current probe</p> <p>DC to 100 kHz Range: 100 mV/A, 10 mV/A Current range: 0.4 A to 100 A Maximum operating voltage: 600 Vrms Oscilloscope compatibility: All UNI-T series</p>

<p>UT-P42</p> 	Current probe	<p>DC to 150 kHz          Range: 100 mV/A, 10 mV/A          Current range: 0.4 A to 200 A          Maximum operating voltage: 600 Vrms          Oscilloscope compatibility:          All UNI-T series</p>
<p>UT-P43</p> 	Current probe	<p>DC to 25 MHz          Range: 100 mV/A          Maximum test current: 20 A          Rising time: 14 ns          Oscilloscope compatibility:          All UNI-T series</p>
<p>UT-P44</p> 	Current probe	<p>DC to 50 MHz          Range: 50 mV/A          Maximum test current: 40 A          Rising time: 7 ns          Oscilloscope compatibility:          All UNI-T series</p>
<p>UT-P4030D</p> 	High-frequency current probe	<p>Bandwidth: DC to 100 MHz          Rising time: <math>\leq 3.5</math> ns          Range selection: 30 A/5 A          Maximum test current: 30 A          Voltage of insulated line: 300 V CATI          Oscilloscope compatibility:          All UNI-T series</p>
<p>UT-P4150</p> 	High-frequency current probe	<p>Bandwidth: DC to 12 MHz          Rising time: <math>\leq 29</math> ns          Range selection: 150 A/30 A          Maximum test current: 150 A          Voltage of insulated line: 600 V CATII 300 V CATIII          Oscilloscope compatibility:          All UNI-T series</p>
<p>UT-P4500</p> 	High-frequency current probe	<p>Bandwidth: DC to 5 MHz          Rising time: <math>\leq 70</math> ns          Range selection: 500 A/75 A          Maximum test current: 500 A          Voltage of insulated line: 600V CATII 300 V CATIII</p>

		Oscilloscope compatibility: All UNI-T series
<p>UT-P4100A</p> 	Low-frequency current probe	<p>Bandwidth: DC to 600 kHz</p> <p>Rising time: <math>\leq 583</math> ns</p> <p>Maximum test current: 100 A</p> <p>Range selection: 100 A/10 A</p> <p>Range sensitivity: 0.1 V/A, 0.01 V/A</p> <p>Common-mode voltage RMS: CATI 600 V CATII 600 V CATIII 300 V</p> <p>Oscilloscope compatibility: All UNI-T series</p>
<p>UT-P4100B</p> 	Low-frequency current probe	<p>Bandwidth: DC to 2 MHz</p> <p>Rising time: <math>\leq 175</math> ns</p> <p>Maximum test current: 100 A</p> <p>Range selection: 100 A/10 A</p> <p>Range sensitivity: 0.1 V/A, 0.01 V/A</p> <p>Common-mode voltage RMS: CATI 600 V CATII 600 V CATIII 300 V</p> <p>Oscilloscope compatibility: All UNI-T series</p>

## Active Probe

Model	Type	
<p>UT-PA2000</p> 	Active single-ended probe	<p>10X: DC to 2 GHz</p> <p>Input capacitance: <math>\leq 1</math> pF</p> <p>Dynamic range: <math>\pm 7</math> V (DC or peak AC)</p> <p>Oscilloscope compatibility: MSO7000X/MSO5000HD/MSO3000HD/MSO3000X series</p>
<p>UT-P30</p> 	High voltage differential probe	<p>DC to 100 MHz</p> <p>Attenuation ratio 100:1,10:1</p> <p>Input differential-mode voltage: <math>\pm 800</math> Vpp</p> <p>Oscilloscope compatibility: All UNI-T series</p>

## UT-P31



High voltage  
differential  
probe

DC to 100 MHz  
Attenuation ratio 1000:1,100:1  
Input differential-mode voltage:  $\pm 1.5$  kVpp  
Oscilloscope compatibility: All UNI-T series

## UT-P32



High voltage  
differential  
probe

DC to 50 MHz  
Attenuation ratio 1000:1,100:1  
Input differential-mode voltage:  $\pm 3$  kVpp  
Oscilloscope compatibility: All UNI-T series

## UT-P33



High voltage  
differential  
probe

DC to 120 MHz  
Attenuation ratio 100:1,10:1  
Input differential-mode voltage:  $\pm 14$  kVpp  
Oscilloscope compatibility: All UNI-T series

## UT-P35



High voltage  
differential  
probe

DC to 50 MHz  
Attenuation ratio 500:1, 50:1  
Rising time: 7 ns  
Accuracy: 2%  
Input differential-mode voltage:  
1/50:130 (DC+peakAC)  
1/500:1300 (DC+peakAC)  
Input common-mode voltage:  
100 Vrms, CATI  
600 Vrms, CATII  
Oscilloscope compatibility: All UNI-T series

## UT-P36



High voltage  
differential  
probe

DC to 50 MHz  
Attenuation ratio 2000:1, 200:1  
Rising time: 3.5 ns  
Accuracy: 2%  
Input differential-mode voltage:  
1/200:560 (DC+peakAC)  
1/2000:5600 (DC+peakAC)  
Input common-mode voltage:  
2800 Vrms, CATI  
1400 Vrms, CATII  
Oscilloscope compatibility: All UNI-T series

## Options Ordering and Installation

1. **Purchase options:** Based on your requirements, please purchase the specified function options from UNI-T Sales Personnel and provide the serial number of the instrument that needs the option installed.
2. **Receive certificate:** You will receive the license certificate based on the address provided in the order.
3. **Register and obtain license:** Visit the UNI-T official website license activation session for registration. Use the license key and instrument serial number provided in the certificate to obtain the option license code and license file.
4. **Install the option:** Download the option license file to the root directory of a USB storage device and connect the USB storage device to the instrument. Once the USB storage device is recognized, the Option Install menu will be activated. Press this menu key to begin installing the option.