


DIN-96DI-01

96-CH Isolated DI Terminal Board with DIN-Rail Mounting

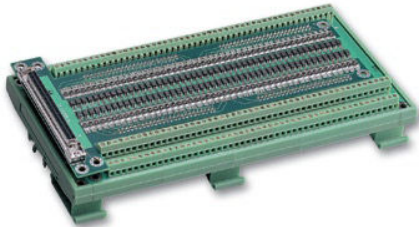

Features

- 96-CH isolated digital inputs
- For use with PCI-7396
- Isolated input voltage up to 24 V
- 2500 V_{RMS} optical isolation
- Screw terminals for easy field wiring

Specifications

- Number of Channels: 96
- Maximum Input Range: 24 V
- Digital Logic Levels
 - 0 to 24 V non-polarity
 - ♦ Input high voltage: 10 V to 24 V
 - ♦ Input low voltage: 0 to 24 V
- Input Resistance: 4.7 kΩ @ 0.5 W
- Isolation Voltage: 2500 V_{RMS}
- I/O Connector: 100-pin SCSI-II female
- Operating Temperature: 0°C to +60°C
- Storage Temperature: -20°C to +80°C
- Relative Humidity: 5% to 95%, non-condensing
- Power Consumption:

+5 V
48 mA maximum

- Dimensions: 226 mm x 121 mm x 48 mm (W x L x H)

Ordering Information

■ DIN-96DI-01

96-CH isolated DI terminal board with DIN-rail mounting

■ Accessory

- Cabling
ACL-102100-1: 100-pin SCSI-II cable, 1 M