

DATENBLATT

ADAM-4100-Serie

HABEN SIE FRAGEN ODER WÜNSCHEN SIE EIN INDIVIDUELLES ANGEBOT?

Unser Team berät Sie gerne persönlich.

TELEFON + 49 (0) 81 41/36 97-0

TELEFAX + 49 (0) 81 41/36 97-30

E-MAIL info@plug-in.de

WWW.PLUG-IN.DE

ADRESSE

Am Sonnenlicht 5

D-82239 Alling bei München



ADAM-4510I ADAM-4520I ADAM-4117

Robust RS-422/485 Repeater

Robust RS-232 to RS-422/485 Converter Robust 8-ch Analog Input Module with Modbus



ADAM-4510I



ADAM-4520I



ADAM-4117



Specifications

General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Power Consumption** 1.4 W @ 24 V_{DC}

Communications

- **Input** RS-485 (2-wire) or RS-422 (4-wire)
- **Output** RS-485 (2-wire) or RS-422 (4-wire)
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, RTS control and RS-422 (switchable)
- **Supports Auto Baud-Rate**
- **Provide RS-485 to RS-422 Convert Ability**

General

- **Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG) (RS-422/485)
1 x DB9-F (RS-232)
- **Power Consumption** 1.2 W @ 24 V_{DC}

Communications

- **Input** RS-232 (DB9)
- **Output** RS-485 (2-wire) or RS-422 (4-wire)
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, RTS control and RS-422 (switchable)
- **Supports Auto Baud-Rate**

Specifications

General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII Command and Modbus/RTU
- **Power Consumption** 1.2 W @ 24 V_{DC}
- **Interface (B version)** RS-485, micro USB

Analog Input

- **Channels** 8 differential and independent configuration channels
- **Input Impedance** Voltage: 800 K Ω
Current: 120 Ω
- **Input Type** mV, V (supports unipolar and bipolar), mA
- **Input Range** 0 ~ 150mV, 0 ~ 500mV, 0 ~ 1V, 0 ~ 5V, 0 ~ 10V, 0 ~ 15V, ± 150 mV, ± 500 mV, ± 1 V, ± 5 V, ± 10 V, ± 15 V, ± 20 mA, 0 ~ 20 mA, 4 ~ 20mA
- **Accuracy**
Voltage mode : $\pm 0.1\%$ or better
Current mode : $\pm 0.2\%$ or better
- **Resolution** 16-bit
- **Sampling Rate** 10/100 samples/sec (selected by utility)
- **CMR @ 50/60 Hz** 92 dB
- **NMR @ 50/60 Hz** 60 dB
- **Over Voltage Protection** ± 60 V_{DC}
- **High Common Mode** 200 V_{DC}
- **Span Drift** ± 25 ppm/ $^{\circ}$ C (Typical)
- **Zero Drift** $\pm 6\mu$ V/ $^{\circ}$ C
- **Built-in TVS/ESD Protection**

Common Specifications

General

- **Certification** FCC, CE, UL, UL Class I, Division 2, Groups A,B,C,D Hazardous Location
- **Power Input** Unregulated 10 ~ 48 V_{DC} w/power reversal protection
- **Isolation Voltage** 3,000 V_{DC}

Environment

- **Operating Humidity** 5 ~ 95% RH
- **Operating Temperature** -40 ~ 85 $^{\circ}$ C (-40 ~ 185 $^{\circ}$ F)
- **Storage Temperature** -40 ~ 85 $^{\circ}$ C (-40 ~ 185 $^{\circ}$ F)
- **Supports Noise Rejection**

Ordering Information

- **ADAM-4510I** Robust RS-422/485 Repeater
- **ADAM-4520I** Robust RS-232 to RS-422/485 Converter
- **ADAM-4117** Robust 8-ch Analog Input Module with Modbus

ADAM-4118


ADAM-4150

ADAM-4168

Robust 8-ch Thermocouple Input Module with Modbus

Robust 15-ch Digital I/O Module with Modbus

Robust 8-ch Relay Output Module with Modbus

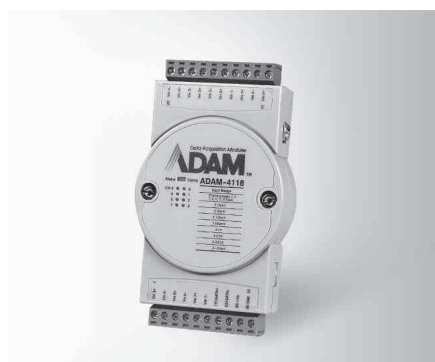

ADAM-4118



ADAM-4150



ADAM-4168



Specifications

General

- **Certification** FCC, CE, UL, UL Class I Division 2
- **Power Consumption** 0.5W @ 24 V_{DC}

Analog Input

- **Channels** 8 differential and independent configuration channels
- **Input Impedance** Voltage: 20 MΩ
Current: 120 Ω
- **Input Type** T/C, mV, V, mA
- **Input Range** Thermocouple

J	0 ~ 760°C	R	500 ~ 1,750°C
K	0 ~ 1,370°C	S	500 ~ 1,750°C
T	-100 ~ 400°C	B	500 ~ 1,800°C
E	0 ~ 1,000°C		

Voltage mode ±15 mV, ±50 mV, ±100 mV, ±500 mV, ±1 V, ±2.5 V

Current mode ±20 mA, 4 ~ 20 mA

- **Accuracy** Voltage mode: ±0.1% or better
Current mode: ±0.2% or better
- **Resolution** 16-bit
- **Sampling Rate** 10/100 samples/sec (selected by Utility)
- **CMR @ 50/60 Hz** 92 dB
- **NMR @ 50/60 Hz** 60 dB
- **Overvoltage Protection** ±60 V_{DC}
- **High Common Mode** 200 V_{DC}
- **Span Drift** ±25 ppm/°C (Typical)
- **Zero Drift** ±6μV/°C
- **Built-in TVS/ESD Protection**
- **Burnout Detection**

General

- **Certification** FCC, CE, UL, UL Class I Division 2
- **Power Consumption** 0.7 W @ 24 V_{DC}

Digital Input

- **Channels** 7
- **Input Level** Dry contact: Logic level 0: Close to GND
Logic level 1: Open
Wet contact: Logic level 0: 3 V max
Logic level 1: 10 ~ 30 V
(Note: The Digital Input Level 0 and 1 status can be inverted)

- **Supports 3 kHz Counter Input (32-bit + 1-bit overflow)**
- **Supports 3 kHz Frequency Input**
- **Supports Invert DI Status**
- **Over Voltage Protection** 40 V_{DC}

Digital Output

- **Channels** 8, open collector to 40 V (0.8A max. load)
- **Power Dissipation** 1W load max
- **RON Maximum** 150 mΩ
- **Supports 1 kHz Pulse Output**
- **Supports High-to-Low Delay Output**
- **Supports Low-to-High Delay Output**

Specifications

General

- **Certification** FCC, CE, UL
- **Power Consumption** 1.8 W @ 24 V_{DC}

Relay Output

- **Output Channels** 8 Form A
- **Contact Rating (Resistive)** 0.5 A @ 120 V_{AC}
0.25 A @ 240 V_{AC}
1 A @ 30 V_{DC}
0.3 A @ 110 V_{DC}
- **Breakdown Voltage** 750 V_{AC} (50/60 Hz)
- **Initial Insulation Resistance** 1 G Ω min. @ 500 V_{DC}
- **Relay Response Time (Typical)** On: 3ms
Off: 1ms
- **Total Switching Time** 10 ms
- **Supports 100 Hz pulse output**
- **Maximum Operating Speed** 50 operations/min (at related load)

Common Specifications

General

- **Power Input** Unregulated 10 ~ 48 V_{DC}
- **Watchdog Timer** System (1.6 second) & Communication
- **Connector** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Isolation Voltage** 3,000 V_{DC}
- **Interface (B version)** RS-485, micro USB

- **Supported Protocols** ASCII Command and Modbus/RTU

Environment

- **Operating Humidity** 5 ~ 95% RH
- **Operating Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)

Ordering Information

- **ADAM-4118** Robust 8-ch Thermocouple Input Module w/ Modbus
- **ADAM-4150** Robust 15-ch Digital I/O Module with Modbus
- **ADAM-4168** Robust 8-ch Relay Output Module with Modbus