

DATENBLATT

CPS-BXC200

HABEN SIE FRAGEN ODER WÜNSCHEN SIE EIN INDIVIDUELLES ANGEBOT?

Unser Team berät Sie gerne persönlich.

TELEFON + 49 (0) 81 41/36 97-0

TELEFAX + 49 (0) 81 41/36 97-30

E-MAIL info@plug-in.de

WWW.PLUG-IN.DE

ADRESSE

Am Sonnenlicht 5

D-82239 Alling bei München



CONPROSYS Series
IoT Edge Controller
CPS-BXC200



* Specifications, color and design of the products are subject to change without notice.

Features

Secured IoT device for edge computing

As for the product with an OS model, Windows 10 IoT Enterprise 64bit version supporting four languages (Japanese, English, Chinese, and Korean), and McAfee Whitelist type anti-virus software are pre-installed. The CPS-BXC200 already has all the equipment required for an Internet-connected device.

Three Gigabit LAN ports alternating connections between different network layers

This product is equipped with three Gigabit LAN ports. This makes it the optimal device for IoT gateway applications that alternate connections between different network layers such as between field busses and controllers within a factory and higher-order information system networks.

I/O extension modules with the same API functions as PCI Express, PCI, USB bus product

Development performed with a Windows PC and CONTEC's wide array of expansion cards is made even more efficiently thanks to the fact that applications can be directly ported to product and I/O modules in the execution environment. Stacking of up to eight I/O modules is possible. (The total current consumption of configurable modules shall be 3.3A or less)

Contributing to reduction of running cost and promotion of energy efficiency

Adopting the low-power platform of Intel® Atom™ Processor E3950 achieves lower power consumption while still ensuring sufficient performance.

Adaptable to a temperature range between -20 and +60°C

The product is capable of operating in the temperature between -20 and + 60°C. It can be installed in the various environments. (when using 1000BASE-T: -20 to +55°C)

Fan-less design that reduces maintenance and inspection work

This products spindle-less design eliminates CPU fan, and adopts SSD for the storage. The using parts that degrade over time is minimized to facilitate maintenance.

This product is an IoT Edge Controller with an Intel Atom processor E3950 and can be mounted on 35mmDIN rail. Connect a CONPROSYS series configurable I/O module with the controller to provide such function as analog I/O.

The use of readily available parts ensures the product to be applied easily. In addition, Contec-customized BIOS allows support to be provided at the BIOS level.

A space-saving design that can be installed in spaces with roughly the same area as a palm-size.

It has extension interfaces such as Analog RGB, Display Port, 1000BASE-T, USB 3.0, and serial.

It employs a M.2/CFast card for storage and is fan-less to ensure a totally spindle-less design that simplifies maintenance.

Moreover, this product is equipped with a RAS*1 function independent of the main computer functions. This feature provides various functions to increase system reliability by automatically restarting the system when detecting errors such as frozen programs, and a rise in internal temperature, and by saving detailed logs of the occurrence of errors, which can be useful in failure analysis..

*1 Reliability Availability and Serviceability: Support functions for stable system operation.

Packing List

- Product (CPS-BXC200) ...1
- End Cover...1 (attached to the product)
- CFast card removal prevention fitting...1
- USB removal prevention fitting...1
- Cable Tie...1
- Washer assembled screw (M3 x 6) ...2
- 3-pin Connector...1
- 6-pin Connector...1
- DIN rail...1
- Serial Number Label...1
- Product Guide ... 1
- Warranty Certificate ...1
- END USER LICENSE AGREEMENT...1 *1
- Setup Procedure Document...1 *1
- Recovery Media...1 *1

*1 These items are not included in the CPS-BXC200-NAxxxx model. (Base model)

* This product is verified in conformity with our recommended power supply. In case you use other power supplies, thus, it may not be able to fulfill certification requirements. Information about recommended power supply, see the Contec website.

* Use the supplied plastic DIN rail when connecting this product and a module on a desk top for system development or validation. If you use the supplied plastic DIN rail in the field, it cannot be covered by warranty. Therefore, when you set the product and module in the field, use the commercially available DIN rail.

Specifications

Function specifications

Item	Description	
CPU	Intel® Atom™ Processor x7-E3950 1.6 GHz	
BIOS	BIOS (mfd. by AMI)	
Memory	204pin SO-DIMM socket x 1, PC3-12800(DDR3L 1600) ECC	
	4GB	8GB
Graphic controller	Intel® HD Graphics 505 (built into CPU)	
System resolution	Analog RGB	1920 x 1200 @ 60Hz
	Display Port	3840 x 2160 @ 60Hz
Display	Analog RGB x1 (15-pinHD-SUB connector), DisplayPort x1	
M.2 card slot	1 slot, M.2 2242, SATAIII M.2 card(pSLC) equipped	
	32GB *1	64GB *1
CFast card slot	1 slot, CFast card Type I, bootable	
LAN *2	Intel I210IT controller	
	1000BASE-T/100BASE-TX/10BASE-T 3 ports (RJ-45 connector) (Wake On LAN support)	
USB	USB 3.0 standard follow 3ports (TYPE-A connector x3)	
Serial I/F	RS-232C (General-purpose) : 1port (SERIAL PORT A), 9pin D-SUB connector (male)	
	Baud rate : 50 - 115,200bps	
Watch Dog Timer	WDT: Software programmable, 1sec - 255sec (Time up allows reset or shutdown).	
General-purpose I/O	Isolation: Input 2 (One input switchable between remote reset or remote power on) Isolation: Output 1 (One output switchable for WDT external output)	
Hardware monitoring	Monitor CPU temperature and power voltage	
RTC/CMOS	Lithium battery backup Battery life: 10 years or longer. The real-time clock is accurate within ±3 minutes (at 25°C) per month (CPU built-in RTC).	
Power Management	Power management setup via BIOS, Power On by Ring / Wake On LAN function, PC98/PC99 ACPI Power management support	
Stack Bus	The maximum number of stack buses: 8 (The total current consumption of the modules should be less than 3.3A)	
RAS	1 port (3.81mm pitch 6-pin)	
Power supply	Rated input voltage	24VDC
	Input voltage range	24V±10%
	Power consumption (Max)	24V 1.5A (USB I/F, without stack bus power) 24V 4.8A (USB I/F, with stack bus power)
	External device power supply capacity	CFast card slot: +3.3V 0.5A (500mA x 1), USB3.0 I/F: +5V 2.7A (900mA x 3) Stack bus I/F: 24V 3.3A
Physical dimensions (mm)	76 (W)×94(D)×124.8(H) (No projection included)	
Weight	1.1kg	
Installation method	Quick mounting on the 35mm DIN rail	
OS (For the models with OS installation)	Windows 10 IoT Enterprise LTSB 2016 64bit (Japanese, English, Chinese, and Korean)	

*1 The capacity of memory is a value when 1GB is calculated by 1 billion bytes. The capacity that can be recognized from OS might be displayed fewer than an actual value.

*2 Pay attention to the ambient temperature when operating 1000BASE-T.

Installation Environment Requirements

Item	Description	
Operating ambient temperature	-20 - +60°C (-20 - +55°C when operating 1000BASE-T) *3	
Operating ambient humidity	10 - 90%RH (No condensation)	
Non-operating ambient temperature	-20 - +60°C	
Non-operating ambient humidity	10 - 90%RH (No condensation)	
Floating dust particles	Not to be excessive	
Corrosive gases	None	
Line-noise resistance	Line noise	AC Line/±2kV *4 Signal Line /±1kV (IEC61000-4-4 Level 3, EN61000-4-4 Level 3)
	Static electricity resistance	Touch /±4kV (IEC61000-4-2 Level 2, EN61000-4-2 Level 2) Air /±8kV (IEC61000-4-2 Level 3, EN61000-4-2 Level 3)
Vibration resistance	Sweep resistance	10 - 57Hz /semi-amplitude vibration 0.15mm, 57 - 500Hz/2.0G 40minutes each in X, Y, and Z directions (JIS C60068-2-6-compliant, IEC60068-2-6-compliant)
Shock resistance	15G half-sine shock for 11ms in X, Y, and Z directions (JIS C 60068-2-6-compliant, IEC 60068-2-6-compliant)	
Grounding	Class D grounding (previous class 3 grounding), SG-FG/ non-conduction	
Standard	VCCI Class A, FCC Class A, CE Marking (EMC Directive Class A, RoHS Directive)	

*3 Consider ambient temperature derating.

*4 When you use an optional power product (CPS-PWD-90AW24-01).

Optional Products

DIN rail fitting power supply

CPS-PWD-90AW24-01: DIN rail fitting power supply 90[W]
(Input: 100 - 240VAC, output: 24VDC 3.8 A)

CFast Card (SLC)

CFS-4GB-A: CFast Card 4GB
CFS-8GB-A: CFast Card 8GB
CFS-16GB-A: CFast Card 16GB

CFast Card (MLC)

CFS-32GBM-A: CFast Card 32GB

CFast Card (Q-MLC)

CFS-16GBQ-A: CFast Card 16GB
CFS-32GBQ-B: CFast Card 32GB
(Higher environmental resistance type)

Configurable Type Model


CPS-DIO-0808L with digital input/output (no built-in power supply)
CPS-DIO-0808BL with digital input/output (built-in power supply)
CPS-DIO-0808RL with digital input/output (current source)
CPS-DI-16L with digital input (16ch, current sink)
CPS-DI-16RL with digital input (16ch, current source)
CPS-DO-16L with digital output (16ch, current sink)
CPS-DO-16RL with digital output (16ch, current source)
CPS-RRY-4PCC with Relay output
CPS-AI-1608LI with analog input (voltage input 8 channels)
CPS-AI-1608ALI with analog input (current input 8 channels)
CPS-AO-1804LI with analog output (current output 4 channels)
CPS-AO-1804VLI with analog output (voltage output 4 channels)
CPS-CNT-32021 with counter input
CPS-COM-1PC with RS-232C (contains 1port)
CPS-COM-2PC with RS-232C (contains 2 ports)
CPS-COM-1PD with RS-422A/485 (1channel)
CPS-COM-2PD with RS-422A/485 (2 channels)

CAUTION


The normal operation may be impaired or the functions may be limited if a product other than our optional ones are used.

* Visit the Contec website for the latest optional products.

Physical Dimensions

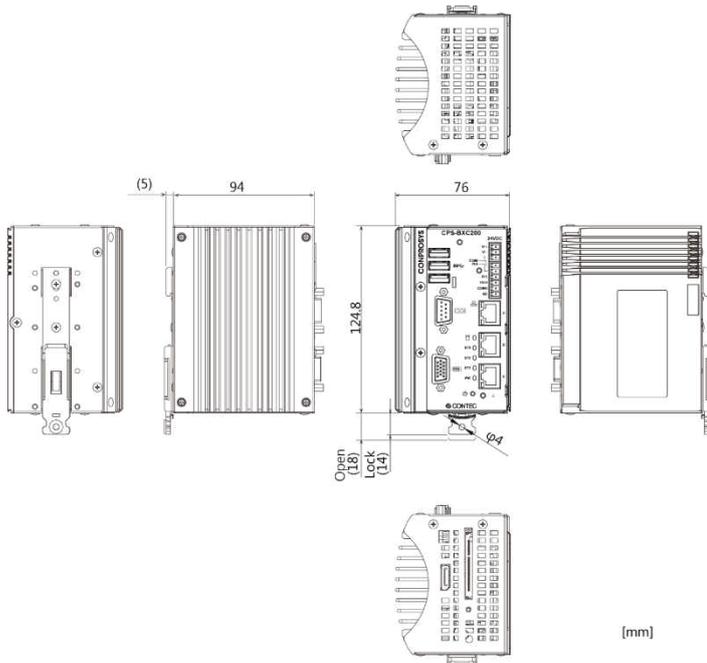

Component Name

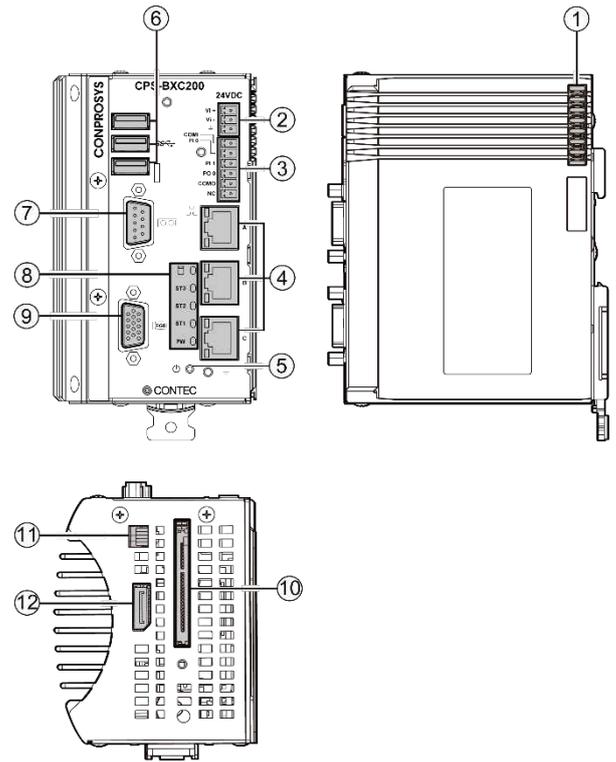

No.	Name	Function
1	Stack Bus	This is used for power supply and communication with the configurable type module.
2	Power Connector	This is a connector for the 3-pin connector included in the package.
3	General-purpose Input/Output/RAS	This is a connector for the 6-pin connector included in the package.
4	LAN Port	This is a connector for LAN.
5	Power Switch	This is used for controlling of the power supply.
6	USB Port	This is a USB3.0 port of type-A.
7	RS-232C Serial Port	This is a RS-232C serial ports (male).
8	LED Indicator	This indicates the status of the product.
9	Analog RGB	This is an analog RGB connector (female) to connect a display monitor.
10	CFast Card slot	This is a connector for CFast CARD Type I.
11	ROM Clear SW	This is used to return the BIOS settings to the default values.
12	Display Port	This is a display connector to connect to the display monitor.