

DATENBLATT

EMPV-1201-C1

HABEN SIE FRAGEN ODER WÜNSCHEN SIE EIN INDIVIDUELLES ANGEBOT?

Unser Team berät Sie gerne persönlich.

TELEFON + 49 (0) 81 41/36 97-0

TELEFAX + 49 (0) 81 41/36 97-30

E-MAIL info@plug-in.de

WWW.PLUG-IN.DE

ADRESSE


Am Sonnenlicht 5

D-82239 Alling bei München



EMPV-1201

mPCIe to dual VGA & HDMI(or DVI) module

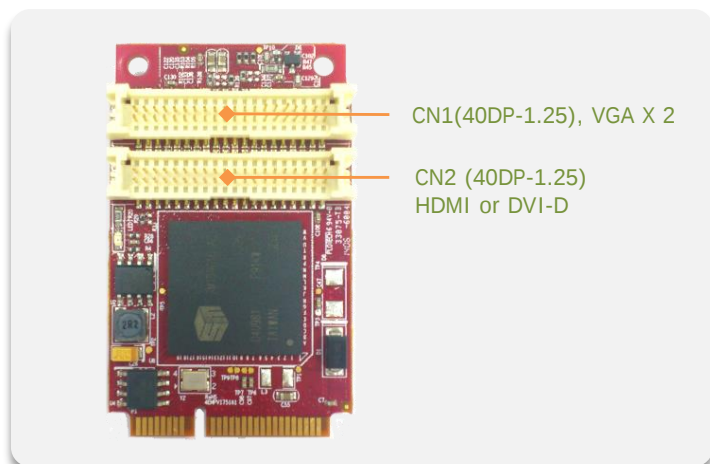


CN1(40DP-1.25), VGA X 2

CN2 (40DP-1.25)
HDMI or DVI-D


Features

- VGA Output up to 1920x1440. up to 75Hz vertical rate.
- HDMI up to 1080P, Ultra low power consumption.
- Allow for 90°, 180°, and 270° rotation of on-screen images.
- DVI-D Single Link up to 1080P.
- Optional Industrial Temperature (-10°C to +85°C) support.
- 30μ" golden finger, 3 years warranty.
- Industrial design. Manufactured in innodisk Taiwan.


Mechanical Drawing

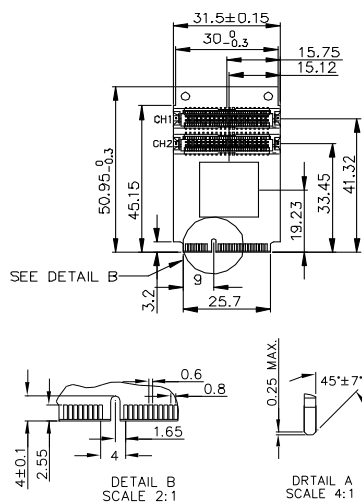

Standard Temp



Wide Temp



HDMI or DVI-D Single Link (CN2)

Signal	Pin	Pin	Signal
+5V	2	1	+3.3V
+5V	4	3	+3.3V
	6	5	
GND	8	7	GND
TMDS D0+	10	9	TMDS D1+
TMDS D0-	12	11	TMDS D1-
GND	14	13	GND
TMDS D2+	16	15	
TMDS D2-	18	17	
GND	20	19	GND
	22	21	
	24	23	
GND	26	25	GND
	28	27	DDC_SCL
	30	29	DDC_SDA
GND	32	31	GND
TMDS CK+	34	33	CEC
TMDS CK-	36	35	HPD
GND	38	37	GND
	40	39	

Dual VGA(CN1)

Signal	Pin	Pin	Signal
+5V	2	1	3.3V
+5V	4	3	3.3V
	6	5	
GND	8	7	GND
R_1	10	9	B_1
G_1	12	11	
GND	14	13	GND
H_Sync_1	16	15	DDC_SCL_1
V_Sync_1	18	17	DDC_SDA_1
GND	20	19	GND
R_0	22	21	B_0
G_0	24	23	
GND	26	25	GND
H_Sync_0	28	27	DDC_SCL_0
V_Sync_0	30	29	DDC_SDA_0
GND	32	31	GND
	34	33	
	36	35	
GND	38	37	GND
	40	39	

Specifications

Form-Factor	mini PCIe
Input I/F	PCI Express 1.0
Output I/F	VGA x 2, HDMI x 1, DVI-D Single Link x 1 (Alternative)
Output Connector	40pin 1.25mm x 2(40DP-1.25)
TDP	1.98W(3.3V x 600mA)
Dimension (WxLxH)	ST: 50.95 x 31.5 x 7 mm, WT: 50.95 x 31.5 x 8.83 mm
Temperature	Operation: STD: 0°C ~ +70°C WT: -10°C ~ +85°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	OS Support : Windows XP (32 bit), Windows 7/8/8.1/10 (32/64 bit), Linux Ubuntu 12.04-16.04(32/64bit), Linux Fedora 17-21(32/64bit), Linux CentOS/Redhat 6.5 (32/64bit)-7.2(64bit) Different CN2 cable for HDMI or DVI-D(Alternative). Please download driver from Myinnodisk website.

Order information

EMPV-1201-C1(Standard Temp.)

EMPV-1201-W1(Wide Temp.)

mPCIe to dual VGA & HDMI(DVI-D Single Link) module

7W9000000080 Dual VGA Cable

7W9000000020 HDMI Cable

7W9000000040 DVI Cable