

DATENBLATT

GPD-1045

HABEN SIE FRAGEN ODER WÜNSCHEN SIE EIN INDIVIDUELLES ANGEBOT?

Unser Team berät Sie gerne persönlich.

TELEFON + 49 (0) 81 41/36 97-0

TELEFAX + 49 (0) 81 41/36 97-30

E-MAIL info@plug-in.de

WWW.PLUG-IN.DE

ADRESSE

Am Sonnenlicht 5

D-82239 Alling bei München



Industrial 10.4" LCD Touch Monitor

GPD-1045

10.4-inch

Ultra-slim

IP65

Win7
Supported



Waterproof gasket design (optional)



Feature

10.4" LCD panel support up to 800 x 600 resolution

High quality silver anodic aluminum front bezel

Combo touch interface: RS-232 or USB alternative

Panel mount and rear VESA mount support

Windows 2000/XP/XPE/CE/7/8 and Linux driver supported

5-Wire resistive touch solution

Applications

Medical cosmetics

Human Machine Interface (HMI)

Kiosk applications

Factory automation / Manufactory automation

Ordering Information

GPD-1045


10.4" inch LCD touch panel

Optional Items

ADP-60W

Adaptor AC-to-DC 12V@5A, 60W, phoenix power connector

Physical dimension

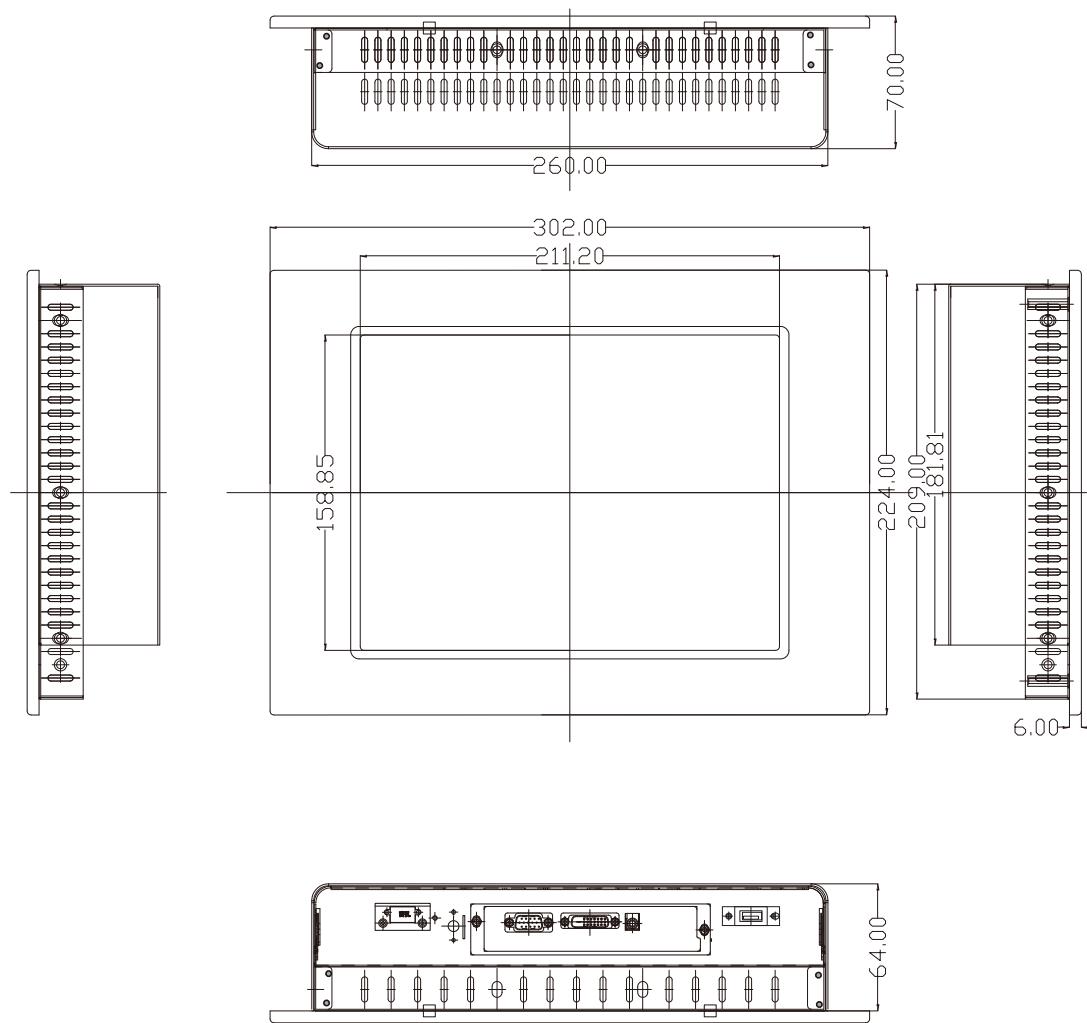

Unit: mm

Specification

		GPD-1045
Display	Panel size	10.4" TFT LCD panel
	Resolution	800 x 600
	Viewing angle	140(H) x 120 (V)
	Brightness	350 (cd/m2)
	Color support	16.8M
	Contrast ratio	500:1
Touch	Touch screen type	5-Wire resistive touch screen
	Surface hardness	3H
	Durability	10 million touches
	Transparency	90%+/-3%
Power	Input voltage range	Supports single 12V input with 12VDC jack
	Power adaptor	AC to DC power adaptor 12V/5A ,60W (Optional)
System	I/O	1 x VGA, 1 x DVI, 1 x USB or RS-232 for resistive touch screen
	OSD	Keys: Menu, Up, Down, Auto adjust, Monitor Power on/off Menu Functions: Brightness, Contrast, Color adjust, Color temp, Auto color, and Language
	Installation	Panel mount & VESA mount 75 x 75 mm
Environment	Operating temperature	0 ~ 45° C
	Storage temperature	-10 ~ 70° C
	Humidity	5 ~ 95%RH 45° C(Non-condensation)
	Vibration	5-500 Hz, 0.026G ² /Hz, 2.16Grms, X, Y, Z, 1 hour per axis
	Certification EMC safety	CE, FCC
Mechanical	Dimension (W x H xD)	320.7x224x70.2 mm
	Weight	4kg