DATENBLATT

GDP-1500

HABEN SIE FRAGEN ODER
WÜNSCHEN SIE EIN INDIVIDUELLES ANGEBOT?
Unser Team berät Sie gerne persönlich.

TELEFON + 49 (0) 81 41/36 97-0
TELEFAX + 49 (0) 81 41/36 97-30
E-MAIL info@plug-in.de
WWW.PLUG-IN.DE

ADRESSE
Am Sonnenlicht 5
D-82239 Alling bei München

Erwähnte Firmen- und Produktnamen sind zum Teil eingetragene Warenzeichen der jeweiligen Hersteller.

Industrial 15” LED ultra slim open frame touch monitor

GPD-1500

15-inch | Ultra-slim | IP54

Feature

- 15” LCD panel support up to 1024 x 768 resolution
- LED backlight panel provides 20 ~ 30% power saving
- 5-Wire resistive touch solution
- Panel mount and rear VESA mount support
- Combo touch interface: RS-232 and USB alternative
- Windows 2000/XP/XPE/CE/7/8 and Linux driver supported

Applications

- Factory automation / Manufactory automation
- ATM/Self-service/Kiosk applications
- Human Machine Interface (HMI)
- Vending Machine / Ticketing Machine

Ordering Information

- GPD-1500F
  15" Open Frame Touch Panel
- GPD-1500
  15" Touch Panel

Optional Items

- ADP-60W
  Adaptor AC-to-DC 12V@5A, 60W, phoenix power connector

All specifications are subject to change without notice

Physical dimension

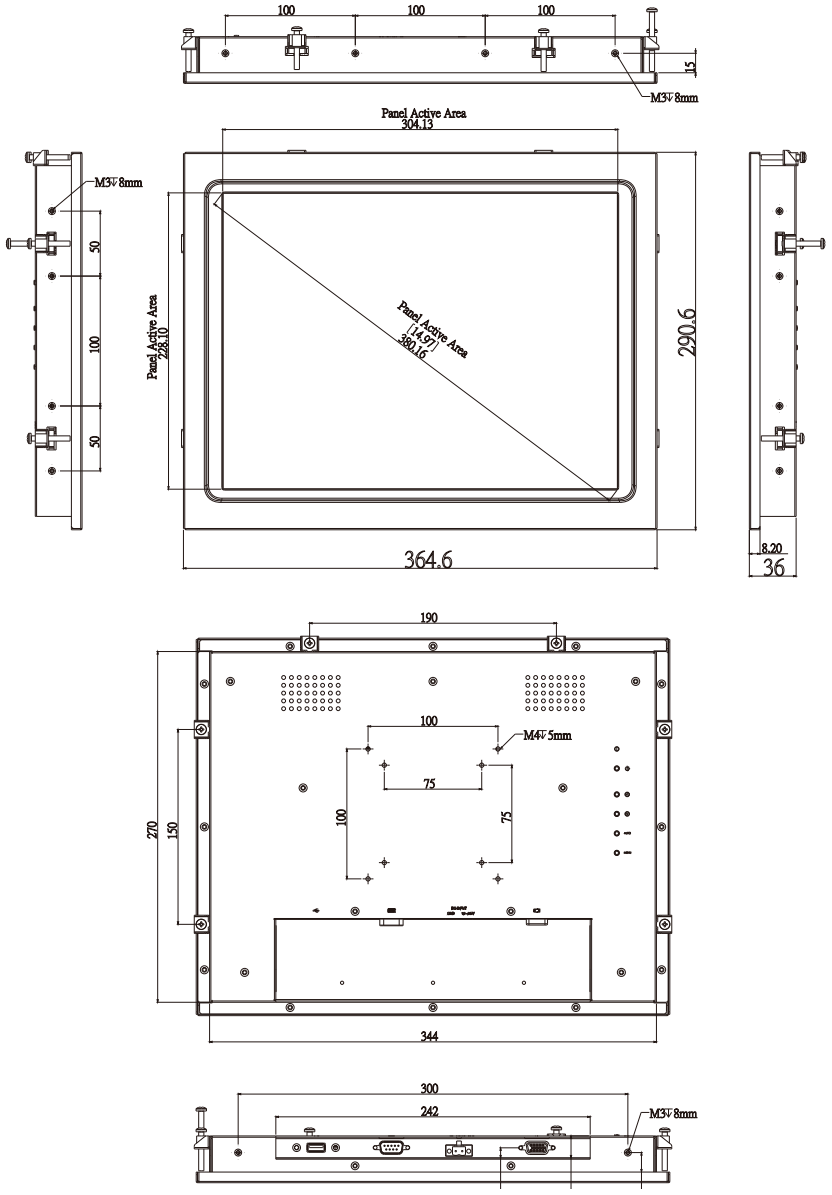

Unit: mm

Specification

		GPD-1500
Display	Panel size	15" TFT Panel
	Resolution	1024 x 768 (XVGA)
	Viewing angle	80 (H) x 80(V)
	Brightness	250 (cd/m2)
	Color support	16.7M colors
	Contrast ratio	600:1
	Response time	8 [msec]
Touch	Touch screen type	5-Wire resistive touch screen
	Surface hardness	3H
	Durability	10 million touches
	Transparency	80%+/-3%
Power	Input voltage range	Supports 12 ~ 24V input with phoenix connector
	60W power adapter	AC 100 ~ 240V input and DC +12V @ 5A MAX. output (option)
System	I/O	1x VGA; 1x USB; 1x RS-232
		(USB & RS-232 are reserved for the connection to enable touch usage only)
	OSD	Keys: Menu, Up, Down, Auto adjust, Monitor Power on/off Menu Functions: Brightness,
		Contrast, Color adjust, Color temp, Auto color, and Language
Environment	Operating temperature	0 ~ 50° C
	Storage temperature	-20 ~ 60° C
	Humidity	5 - 95%RH 50° C(Non-condensation)
	Vibration	5-500 Hz, 0.026G²/Hz, 2.16Grms, X, Y, Z, 1 hour per axis
	Certification EMC safety	CE, FCC, RoHS directive
Mechanical	Dimension	364.6x290.6x36mm
	Weight	3.7kg