

IPPC 1680P

15.6" TFT HD 16:9 Heavy Industrial Panel PC
6th Generation Intel® Core™ i5-6300U, 2.40 GHz
Multi-Touch Screen, 8GB DDR3L, 4 x USB, 3 x COM



Main Features

- Metal housing with robust aluminum front zero bezel for harsh environment
- 10 points P-Cap multi-touch with zero bezel flush front design
- Dual GbE/2nd DisplayPort/Dual USB 3.0 & USB 2.0
- 1 x mini-PCle sockets, 1 x M.2, 1 x RS232/422/485
- DDR3L 8GB/2.5" HDD bracket
- IP66 compliant front panel
- Mounting support: panel/wall/stand/VESA 100mm x 100mm
- DC power input 24VDC

Product Overview

The 15.6" fanless panel PC IPPC 1680P incorporating an industrial motherboard is intended for versatile industrial applications. The panel PC has a touch screen LED backlight LCD panel with 1366 x 768 (HD) resolution. The front panel which adopts flush design and complies with IP66 standard makes it the perfect fit in industrial applications.

The IPPC 1680P supports WLAN expansion and others via dual Gigabit Ethernet connectors, one mini-PCle slot and one M.2 slot. With support for DC power input of 24VDC, IPPC 1680P can gain a strong foothold in industrial field and machine devices. In addition, IPPC 1680P can hook 2nd display via a DisplayPort for dual independent display. IPPC 1680P has one adjustable RS232/422/485 ports.

Specifications

Panel

- LCD size: 15.6", 16:9
- Resolution: HD (WXGA) 1366 x 768
- Luminance: 400cd/m2
- Contrast ratio: 500
- LCD color: 16.7M
- Viewing angle: 80 (U), 80 (D), 85 (L), 85 (R)
- Backlight: LED

Touch

- Ten points P-Cap (projected capacitive touch)
- Touch light transmission: 87%
- Anti-scratch surface: 7H hardness
- Touch interface: USB

System

- Support 6th generation Intel® Core™ i5/i3 BGA type processor
 - Core™ i5-6300U, 3M Cache, up to 3.0 GHz
 - Core™ i3-6100U, 3M Cache, up to 2.3GHz
- BIOS: AMI BIOS
- System memory: 2 x 204-pin DDR3L SO-DIMM socket, 8GB DDR3L (default), support up to 16GB DDR3L-1866, non-ECC and un-buffered

Storage device:

- 1 x M.2 2242 B key socket: optional M.2 2242 storage
- 1 x Hard drive bay: optional 1 x 2.5" SATA HDD
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- Expansion: 1 x mini-PCle sockets (support optional Wi-Fi module)
- Front LED indicator to show operating status


Rear I/O

- Ethernet: 2 x RJ45
- 2nd DisplayPort: 2 x DP1.2
- USB: 2 x USB 2.0, 2 x USB 3.0
- LED indicator: power/HDD/GPIO programmable LED
- Power button
- COM #1: RS232/422/485
- COM #2&3: RS232

Ethernet

- LAN chip: dual Intel® I210-AT Gigabit LAN
- Ethernet interface: 10/100/1000 based-Tx Ethernet compatible

Dimension Drawing

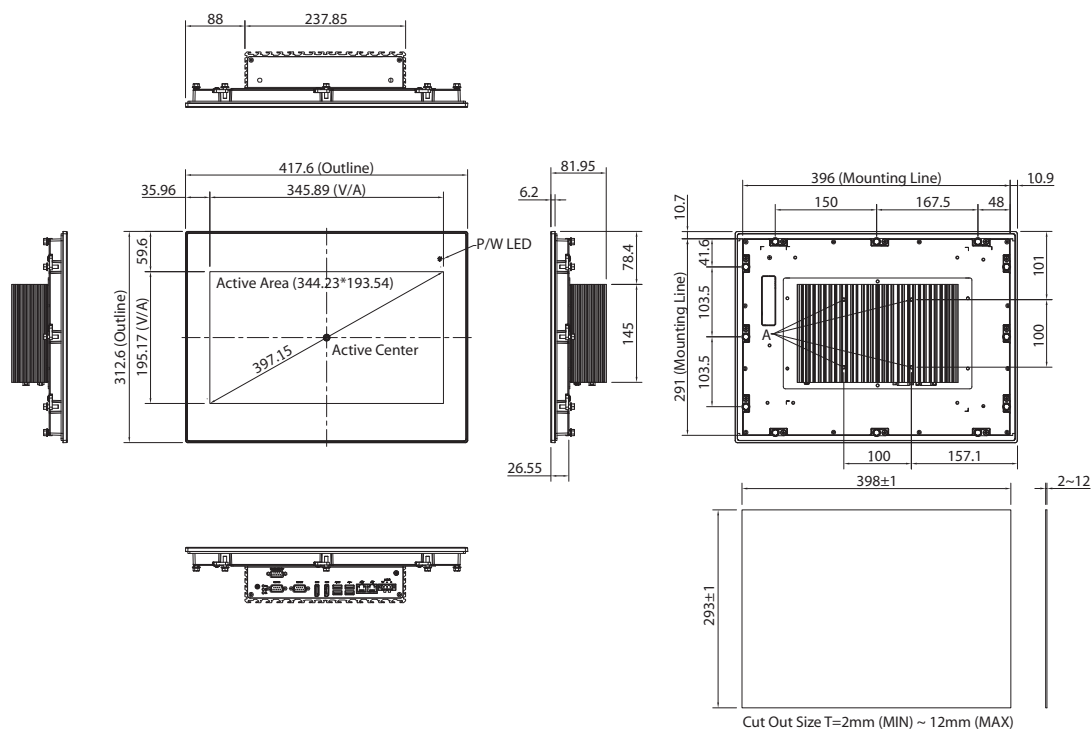

Mechanical & Environment

- Color: black silver front bezel
- IP protection: IP66 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- System with panel mounting kit w/o panel mounting hole
- Power:
 - Power input: 24 VDC
 - Power adapter: optional AC to DC power adapter (+24V, 60W)
- Vibration:
 - IEC 68 2-64 (w/ HDD)
 - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
 - 2Grms @ sine, 5~500Hz, 1hr/axis (SSD operating)
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
 - IEC 68 2-27
 - HDD: 20G@wall mount, half sine, 11ms
- Temperature:
 - Operating temperature: 0°C to 50°C
 - Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 417.6 x 312.6 x 81.95 mm
- Weight: 5.98 kg

Certifications

- CE (including EN61000-6-2/EN61000-6-4)
- FCC class A

OS Support Lists

- Windows 8.1
- Windows 10 64-bit

Ordering Information

Barebone

- **IPPC 1680P-6100U (P/N: 10II1680P00X0)**
15.6" HD LED Backlight Touch Panel PC, 6th generation Intel Core i3-6100U Processor, 2.30GHz, P-Cap Touch Screen, 8GB DDR3L
- **IPPC 1680P-6300U (P/N: 10II1680P01X0)**
15.6" HD LED Backlight Touch Panel PC, 6th generation Intel Core i5-6300U Processor, 2.40GHz, P-Cap Touch Screen, 8GB DDR3L

Options

- **24V, 120W AC/DC power adapter w/o power cord**
(P/N: 7400120023X00)